

FEATURES

- Ethernet 10/100 RJ45 connector for interfacing to CPU or network
- 48 or 24 channel high-current TTL digital I/O lines
- Compatible with industry standard I/O racks such as Grayhill, Opto 22, Western Reserve Controls, etc.
- Eight-bit ports software selectable for inputs or outputs
- All 48 digital I/O lines buffered with 32mA source / 64mA sink current capabilities
- Jumper selectable I/O pulled up to 5V (via 10K Ω) for contact monitoring, pulled down to ground or floating
- Resettable 0.5A fused +5VDC output per I/O connector
- OEM version (board only), features PC/104 size and mounting compatibility
- Small, (4" x 4" x 1.7") rugged, steel industrial enclosure

FACTORY OPTIONS

- Low voltage (LVTTTL) for 3.3V systems
- Board only version with no enclosure
- Extended operating temperature -40°C to +85°C
- Available in a RoHS compliant version

**FUNCTIONAL DESCRIPTION**

This Ethernet I/O board is an ideal solution for adding portable, easy-to-install digital I/O capabilities to any computer or network with an available connection.

The board features 48- or 24- bits of TTL-compatible digital I/O with high-current capabilities. Each eight bit digital port can be programmed to accept inputs or to drive outputs. Power is supplied to the card via an included AC/DC regulated 5VDC external power adapter. The I/O wiring connections are via two or one industry standard 50-pin connectors. For external circuits, fused +5VDC power is available at pin 49 of each I/O connector. The resettable fuse is rated at 0.5A.

All I/O lines are buffered by a type 74ABT543A tristate buffer transceiver capable of sourcing 32 mA or sinking 64 mA. The buffers are configured under program control for input or output. Jumper selected resistors permit user configuration of I/O lines for pull-up (to +5 VDC), pull-down (to ground) or floating depending on the application requirement. Pull-ups are useful for contact monitoring and assure that there are no erroneous outputs at power-up until the card is initialized by system software.

OEM ETH/104 FORM FACTOR

The OEM (board only) version is perfect for a variety of embedded applications. What makes the OEM option unique is that its PCB size and pre-drilled mounting holes match the PC/104 form factor (without the bus connections). This ensures easy installation using standard standoffs inside most enclosures or systems. The board can be added to any PC/104, PCI-104, or PCI/104-Express stack by connecting it to an available 10/100 base T port typically plentiful on embedded CPU form factors such as EBX, EPIC, and PC/104. The ETH-DIO-48 and ETH-DIO-24 OEM board can also be installed using standoffs inside other enclosures or systems.

ACCESSORIES


Available accessories include flat ribbon cables and DIN-rail mountable screw terminal boards. Also available is our low cost IIB-24 which will add optical isolation to any standard 24-channel digital I/O port on a 50 pin connector.

SOFTWARE

Because of Ethernet's ubiquitous nature, these boards are supported for use in all operating systems -- including Windows, Linux, Unix, iOS, Android, -- even Raspberry PI, etc. The software package includes a free Linux and Windows software package with sample programs and source code in C#, Delphi, Visual Basic, and Visual C++ for Windows. Also provided is a graphical setup program in Windows and extensive ethernet-packet level API documentation. Third party application support includes a Windows standard DLL interface usable from the most popular application programs. Embedded OS support includes Windows Embedded Standard.

Distributed by:



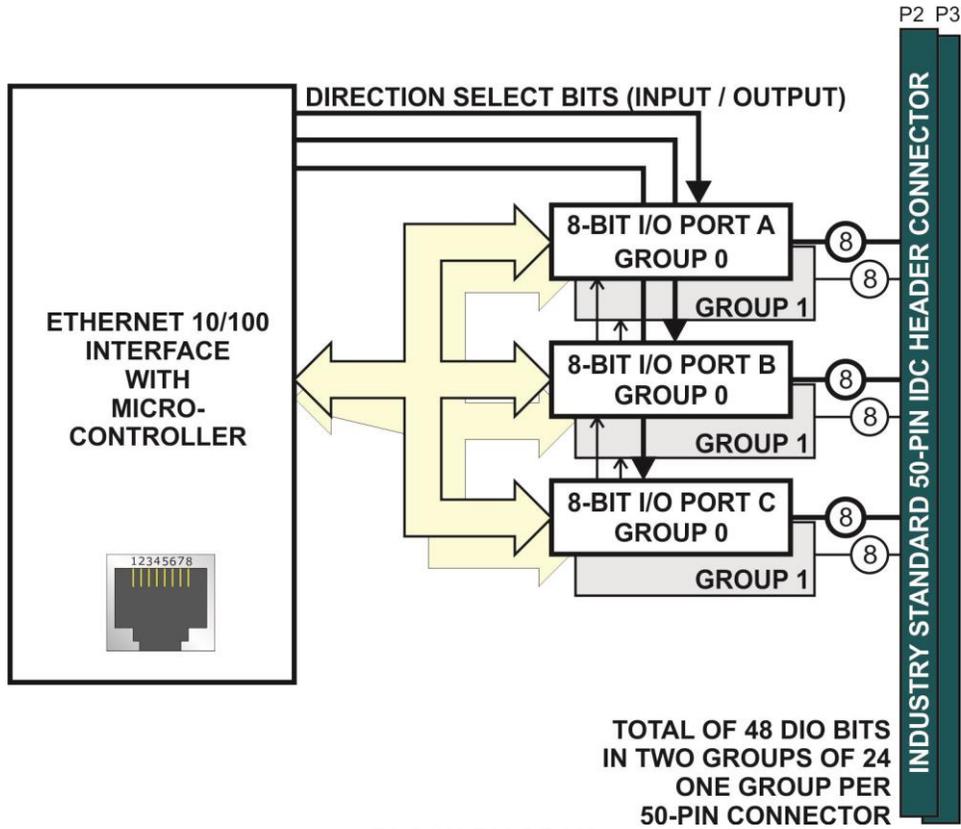

SPECIFICATIONS

Digital I/O (TTL Compatible)

Channels / Groups: 48 or 24 in 8-bit groups

Inputs:

Logic High: 2.0 VDC minimum, 5.5 VDC max.
Logic Low: -0.5 VDC minimum, 0.8 VDC max.
Bias Resistors: 10K Ω

Outputs:

Logic High: 2.0 VDC minimum, source 32 mA
Logic Low: 0.55 VDC maximum, sink 64 mA
Sample rate: Up to 2500 round-trip DI/O Read/Write transactions per second
Note: performance is critically affected by network traffic

Bus Type

Ethernet 10/100 Base T, Auto-detecting 1.5kV isolation

Environmental

Operating Temp.: 0°C to 70°C
Storage Temp.: -40°C to +85°C
Humidity: 5%-90% RH, non-condensing

Mechanical

Board Dimension: 3.550 x 3.775 inches
Box Dimension: 4.00 x 4.00 x 1.7 inches
Connectors: I/O: Dual row 0.1" 50 pin shrouded headers with grounds on all even pins
DC power jack: 2.0mm positive center post
Screw terminals available via enclosure cutout

Power

Basic 48 bit unit: +5VDC from external regulated power supply, <300mA typical (no load), 2.0A max (full load)
Auxiliary Outputs: +5VDC via one 0.5A resettable fuse for both connectors

ORDERING GUIDE

ETH-DIO-48 48 digital input/outputs in rugged enclosure w/DC jack & external power adaptor
ETH-DIO-24 24 digital input/outputs in rugged enclosure w/DC jack & external power adaptor

Model Options

-LV LVTTTL I/O for 3.3V systems
-OEM Board only version with no enclosure or ext. power supply
-T Extended operating temperature -40°C to +85°C
-RoHS Available in a RoHS compliant version

Optional Accessories

STB-DIO-48-ETH Plug-in spring-cage terminal board for 48 Digital I/O lines (used inside enclosure for ETH-DIO-48)
STB-50 Screw terminal board*
STB-48CH 50-pin multi-header universal screw terminal board with steel powder coated enclosure for up to 48 digital I/O channels*
IIB-24 24-channel optical isolator board*
ROB-24 24-channel electromechanical relay board*
CAB50F-6 6' flat ribbon cable with female 50-pin connectors
1781-A24A Solid state module mounting rack
CAB50-6 6' flat ribbon cable female to edge connector
MP104-DIN DIN rail mounting provision

*=requires one or more ribbon cables



TEXIM EUROPE

Partner in Electronic Components & Supply Chain Solutions



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen
Tel: +31 (0)53 573 33 33
Fax: +31 (0)53 573 33 30
nl@texim-europe.com



Denmark

Nørregade 15
DK-9240 Nibe
Tel: +45 88 20 26 30
Fax: +45 88 20 26 39
nordic@texim-europe.com



Belgium

Gentsesteenweg 1154-C22
Chaussée de Gand 1154-C22
B-1082 Brussel / Bruxelles
Tel: +32 (0)2 462 01 00
Fax: +32 (0)2 462 01 25
belgium@texim-europe.com



United Kingdom

St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS
Tel: +44 (0)1522 789 555
Fax: +44 (0)845 299 22 26
uk@texim-europe.com



Germany

Justus-von-Liebig-Ring 7-9
D-25451 Quickborn
Tel: +49 (0)4106 627 07-0
Fax: +49 (0)4106 627 07-20
germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München
Tel: +49 (0)89 436 086-0
Fax: +49 (0)89 436 086-19
germany@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg
Tel: +43 (0)662 216026
Fax: +43 (0)662 216026-66
austria@texim-europe.com

Texim Europe B.V.

Elektrostraat 17
NL-7483 PG Haaksbergen
Tel: +31 (0)53 573 33 33
info@texim-europe.com
www.texim-europe.com

