


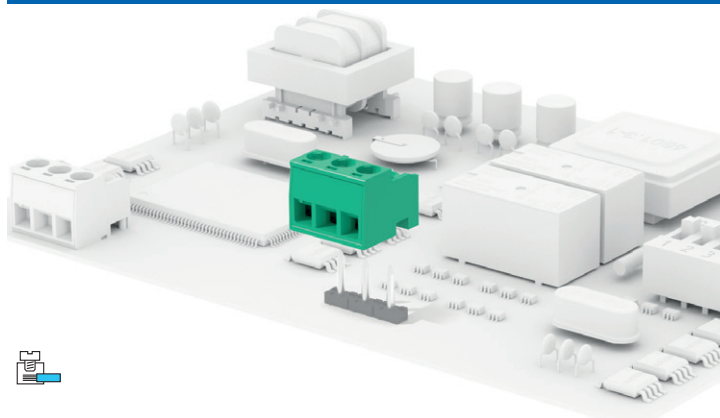

General data

Dimensional class:	low
Standard colour:	green
Pitches:	metric 5 mm, 10 mm (.197 in, .394 in)
Screw dimension:	M3
Recommended/highest tightening torque:	0.5/0.6 Nm (4.42/5.30 lbf-in)
Stripping length:	4 ÷ 6 mm (.16 ÷ .24 in)
Operating temperature range:	-40 °C ÷ +105 °C (-40 °F ÷ +221 °F)
Contact resistance:	<15 mΩ
Insulation resistance:	>10 ⁹ Ω (500V DC)
Insulating material group:	I (CTI ≥ 600V)

Certifications

UL (n. E167473)

300 V - 10 A - 30÷14 AWG - 6 lbf-in for 5 mm pitch (12 A for "0" version)
600 V - 10 A - 30÷14 AWG - 6 lbf-in for 10 mm pitch (12 A for "0" version)

VDE (n. 40013401)

250 V - 10 A - 1.5 mm² - T95 - 2.5kV - 2 (12 A - T90 for "1" version) for 5 mm pitch
750 V - 10 A - 1.5 mm² - T95 - 2.5kV - 2 (12 A - T90 for "1" version) for 10 mm pitch

IMQ (n. EE099)

300 V - 11 A - 2.5 mm² - T110 - 4kV - III/2 - T110 / 300 V 11 A - 2.5 mm² - T110 - 4 kV - III/2 - T110 for 5 mm pitch
1000 V - 11 A - 2.5 mm² - T110 - 8kV - III/2 - T110 / 1000 V 11 A - 2.5 mm² - T110 - 8 kV - III/2 - T110 for 10 mm pitch

CSA: (n. LR102896)



300 V - 12 A - 30÷14 AWG for 5 mm pitch (10A for "9" and "N" versions)
600 V - 12 A - 30÷14 AWG for 10 mm pitch (10A for "9" and "N" versions)

Application values for end-use equipment have to be in accordance to norms and applicable to it. The certifications of some product's versions could be pending, for more detailed and updated data please refer to our web site www.sauro.net or your representative Sales Manager

Please see "CONNECTORS COMBINATIONS"


Your drawings and notes

Distributed by:

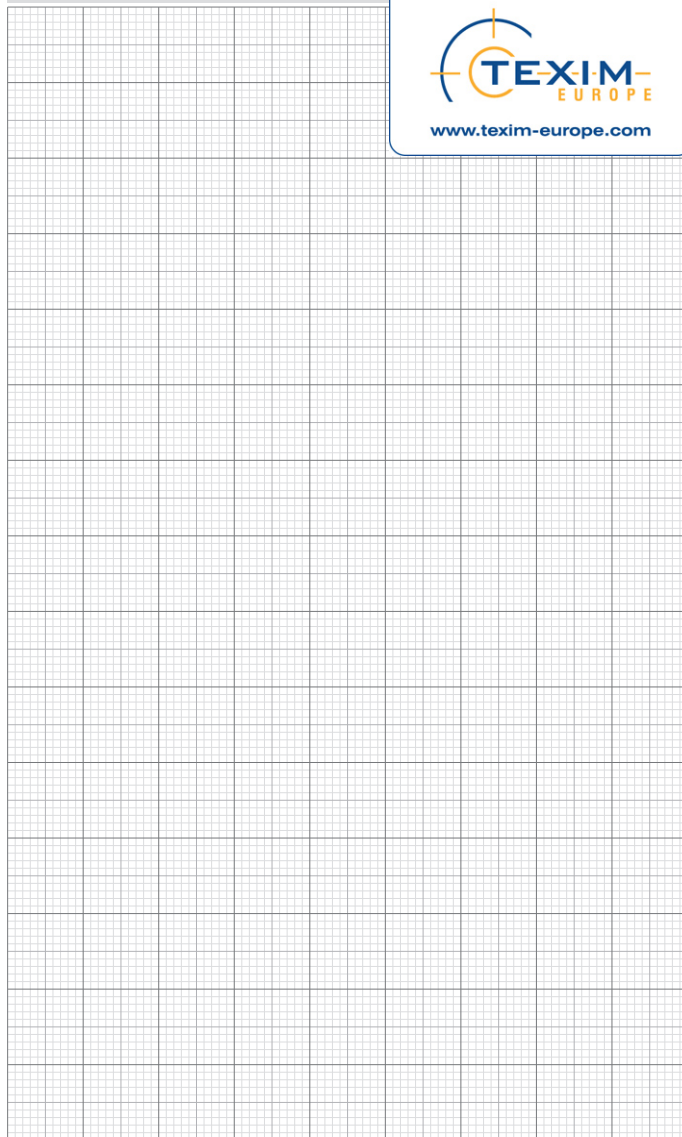


Straight, modular female

CSF_0M1 - 2 ÷ 25 poles, 5 mm / .197" pitch
CSF_0M2 - 1 ÷ 13 poles, 10 mm / .394" pitch




Straight, side stackable female

CSF_011 - 2 ÷ 25 poles, 5 mm / .197" pitch
CSF_012 - 2 ÷ 13 poles, 10 mm / .394" pitch





90°-270°, modular female

















CSF_0W1 - 2 ÷ 25 poles, 5 mm / .197" pitch
CSF_0W2 - 1 ÷ 13 poles, 10 mm / .394" pitch



90° - 270°, side stackable female

CSF_091 - 2 ÷ 25 poles, 5 mm / .197" pitch
CSF_092 - 2 ÷ 13 poles, 10 mm / .394" pitch



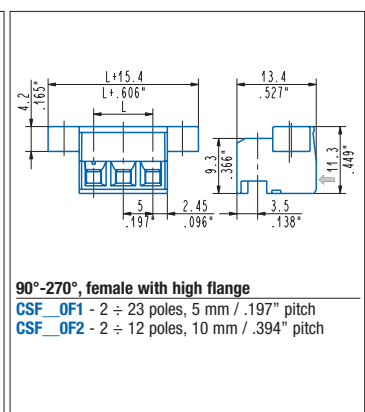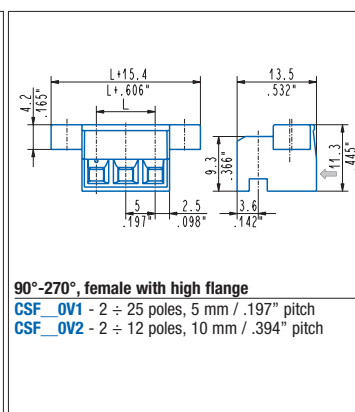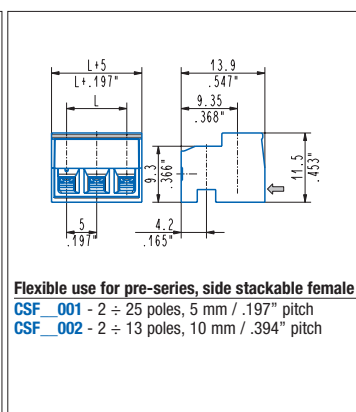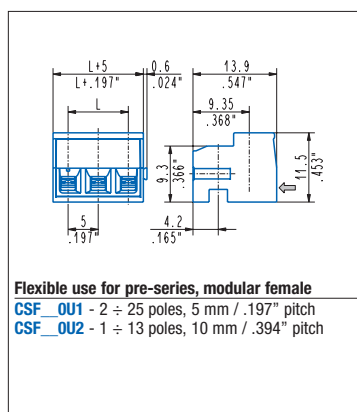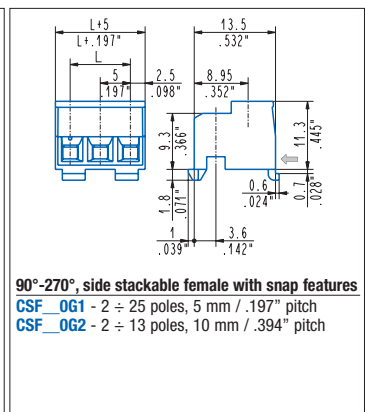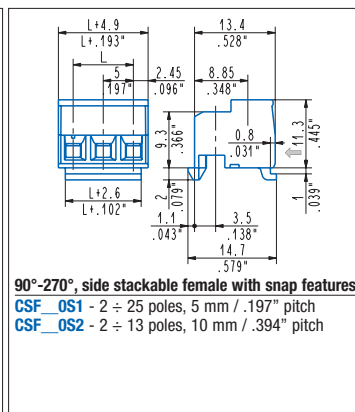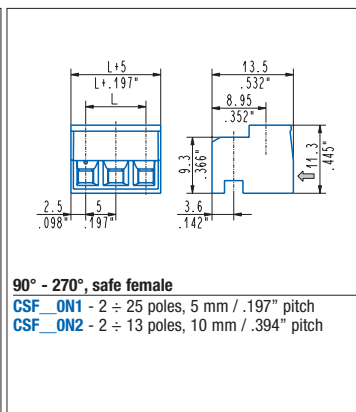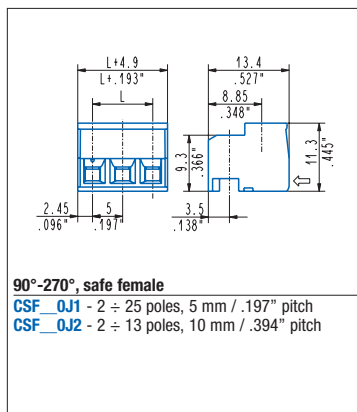

Usable with:

CSM

Page 53

CSMH

Page 53

CSMD

Page 54



The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

Italy



Via Matteotti 43
IT-20864 Agrate Brianza (MB)

T: +39 (0)39 971 3293
F: +39 (0)39 971 3293
E: italy@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com