

150W, wide input voltage, isolated & regulated single output DC-DC converter



Patent Protection RoHS



FEATURES

- Wide input voltage range: 50-160V
- High efficiency up to 91%
- No-load power consumption as low as 3mA
- Isolation voltage 3000VDC
- Operating temperature range: -40°C~+100°C
- Input under-voltage protection, output over-voltage, over-current, short circuit, over-temperature protection
- International standard: 1/2 brick
- Meets requirements of railway standard EN50155

URF1D_HB-150W (H) series is a high performance product designed for the field of railway applications. Output power up to 150W, no min load requirement, wide input voltage 50-160VDC, which allows the base plate operating temperature up to 100°C. Further product features include input under-voltage protection, output over-voltage protection, short circuit protection, over current protection, over temperature protection, remote control and compensated, output voltage regulation functions. Meets the EN50155 railway standard. Widely used in the railway system and associated equipment.

Selection Guide

Part No.	Input Voltage (VDC)			Output		Efficiency (% Min./Typ) @ Full Load	Max. Capacitive Load(μF)
	Nominal	(Range)	Max.*	Output Voltage(VDC)	Output Current (mA)(Max./Min.)		
URF1D12HB-150W	110	(66-160)	170	12	12500/0	87/89	10000
		(50-66)			10000/0		
URF1D12HB-150WH		(66-160)		12	12500/0	87/89	10000
		(50-66)			10000/0		
URF1D15HB-150W		(66-160)		15	10000/0	87/89	6800
		(50-66)			8000/0		
URF1D15HB-150WH		(66-160)		15	10000/0	87/89	6800
		(50-66)			8000/0		
URF1D24HB-150W	110	(66-160)	170	24	6250/0	89/91	4400
		(50-66)			5000/0		
URF1D24HB-150WH		(66-160)		24	6250/0	89/91	4400
		(50-66)			5000/0		

Note: *Exceeding the maximum input voltage may cause permanent damage.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	Nominal input	--	1495/3	1532/10	mA
Reflected Ripple Current	Nominal input	--	80	--	
Input Impulse Voltage (1sec. max.)		-0.7	--	180	VDC
Starting Voltage		--	47	50	
Under-voltage Shutdown Voltage		35	43	50	
Start-up Time		--	25	--	mS
Input Filter		Pi filter			
Ctrl*	Module switch on	Ctrl psuspended or connected to TTL high level (3.5-12VDC)			
	Module switch off	Ctrl connected to -Vin or low level (0-1.2VDC)			
	Input current when switched off	--	2	5	mA
Hot Plug		Unavailable			

Note: * the voltage of Ctrl pin is relative to input pin -Vin.

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Nominal input,10%-100% load		--	±1	±3	%
Line Regulation	Full load, the input voltage is from low to high		--	--	±0.3	
Load Regulation	Nominal input,10%-100% load		--	--	±0.5	
Transient Recovery Time	25% load step change		--	300	500	μs
Transient Response Deviation		15V, 24V output	--	±3	±5	%Vo
		12V output	--	±4	±8	
Temperature Coefficient	Full load		--	--	±0.03	%/℃
Ripple & Noise *	20MHz bandwidth (with 10%-100% load)		--	60	150	mVp-p
Output voltage Regulated range(Trim)			95	--	110	%Vo
Output voltage remote compensation(Sense)			--	--	105	
Over-voltage Protection	Input voltage range		110	--	140	%Vo
Over-current Protection			110	130	180	%Io
Short circuit Protection	Nominal input		Hiccup, continuous, self-recovery			

Note: * The measuring method of ripple and noise, please refer to Fig. 2.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation Voltage	Input-output	3000	--	--	VDC
	Input-aluminum plate	1500	--	--	
	Output-aluminum plate	1000	--	--	
Isolation Resistance	Input-output, insulation voltage 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output, 100KHz/0.1V	--	2500	--	pF
Operating Temperature	See Temperature Derating Curve Fig. 1	-40	--	100	°C
Base- Plate Temperature	Within the operating temperature curve	-40	--	100	
Storage Temperature		-55	--	125	
Over-temperature Protection	Base- Plate Temperature	100	--	120	
Pin Welding Resistance Temperature	Welding spot is 1.5mm away from the casing, 10 seconds	--	--	300	
Storage Humidity	Non-condensing	5	--	95	%RH
Thermal Resistance	URF1D12HB-150W URF1D15HB-150W URF1D24HB-150W	Natural convection	7.8	--	°C/W
		200LFM convection	4.44	--	
		400LFM convection	3.39	--	
		1000LFM convection	2.52	--	
	URF1D12HB-150WH URF1D15HB-150WH URF1D24HB-150WH	Natural convection	3.7	--	
		200LFM convection	2.2	--	
		400LFM convection	1.76	--	
		1000LFM convection	1.28	--	
Switching Frequency	PWM mode	--	160	--	KHz
MTBF	MIL-HDBK-217F@ (Plate Tb=70°C, GB)	500	--	--	K hours
Cooling Test		EN60068-2-1			
Dry Heat		EN60068-2-2			
Damp heat		EN60068-2-30			
Shock and Vibration Test		IEC/EN61373			



Physical Specifications

Casing Material	Aluminum plate + plastic case	Black flame-retardant and heat-resistant plastic (UL94-V0)
	Heatsink	Aluminum Alloy
Weight	URF1D12HB-150W、URF1D15HB-150W、URF1D24HB-150W	70g (Typ.)
	URF1D12HB-150WH、URF1D15HB-150WH、URF1D24HB-150WH	120g (Typ.)
Cooling method	Natural convection or Forced convection	



EMC Specifications

EMI	CE	CISPR22/EN55022	Class B (see Fig.4)	
EMS	ESD	IEC/EN61000-4-2 GB/T17626.2	Contact $\pm 6\text{KV}$, Air $\pm 8\text{KV}$	perf.Criteria B
	RS	IEC/EN61000-4-3 GB/T17626.3	10V/m	perf.Criteria A
EMS	CS	IEC/EN61000-4-6 GB/T17626.6	10Vr.m.s	perf.Criteria A
	EFT	IEC/EN61000-4-4 GB/T17626.4	$\pm 2\text{KV}$ (5KHz/100KHz) (see Fig. 4 for recommended circuit)	perf.Criteria B
	Surge	IEC/EN61000-4-5 GB/T17626.5	$\pm 2\text{KV}$ (1.2 μs /50 μs 2 Ω) (see Fig. 4 for recommended circuit)	perf.Criteria B
	Immunities of short interruption	EN50155	100%—0%, 10ms	perf.Criteria B

Efficiency Curves

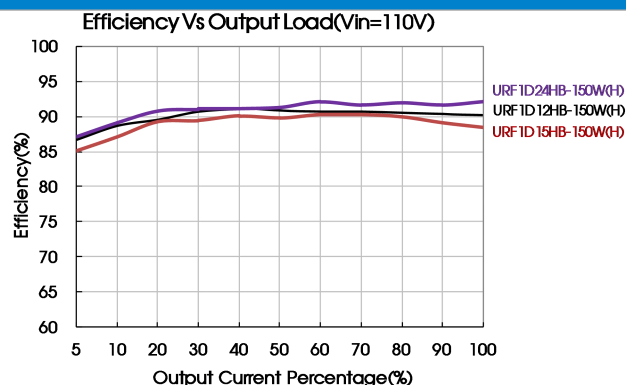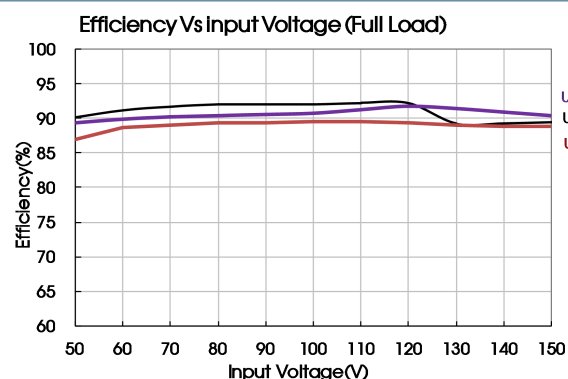

Temperature Derating Curve

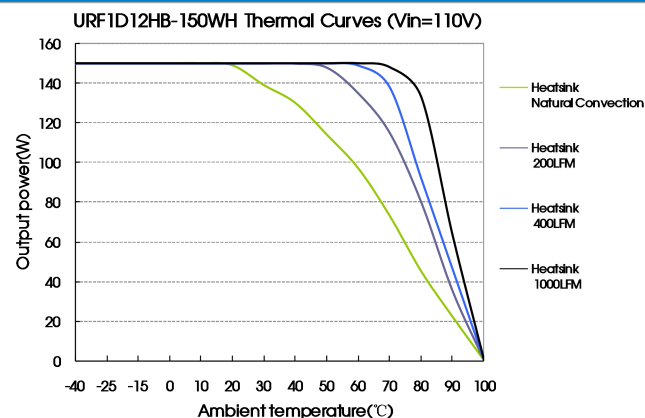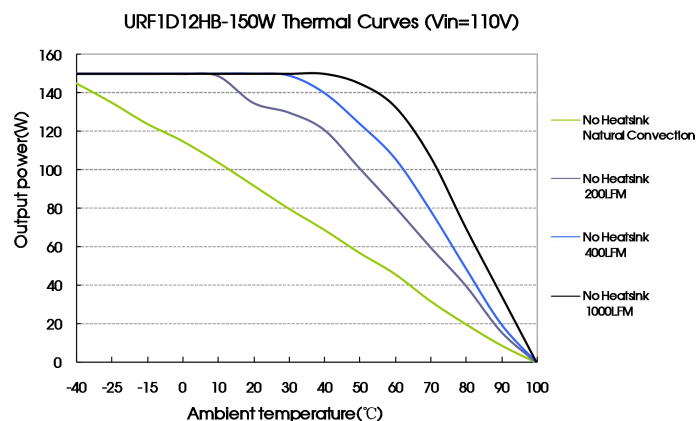


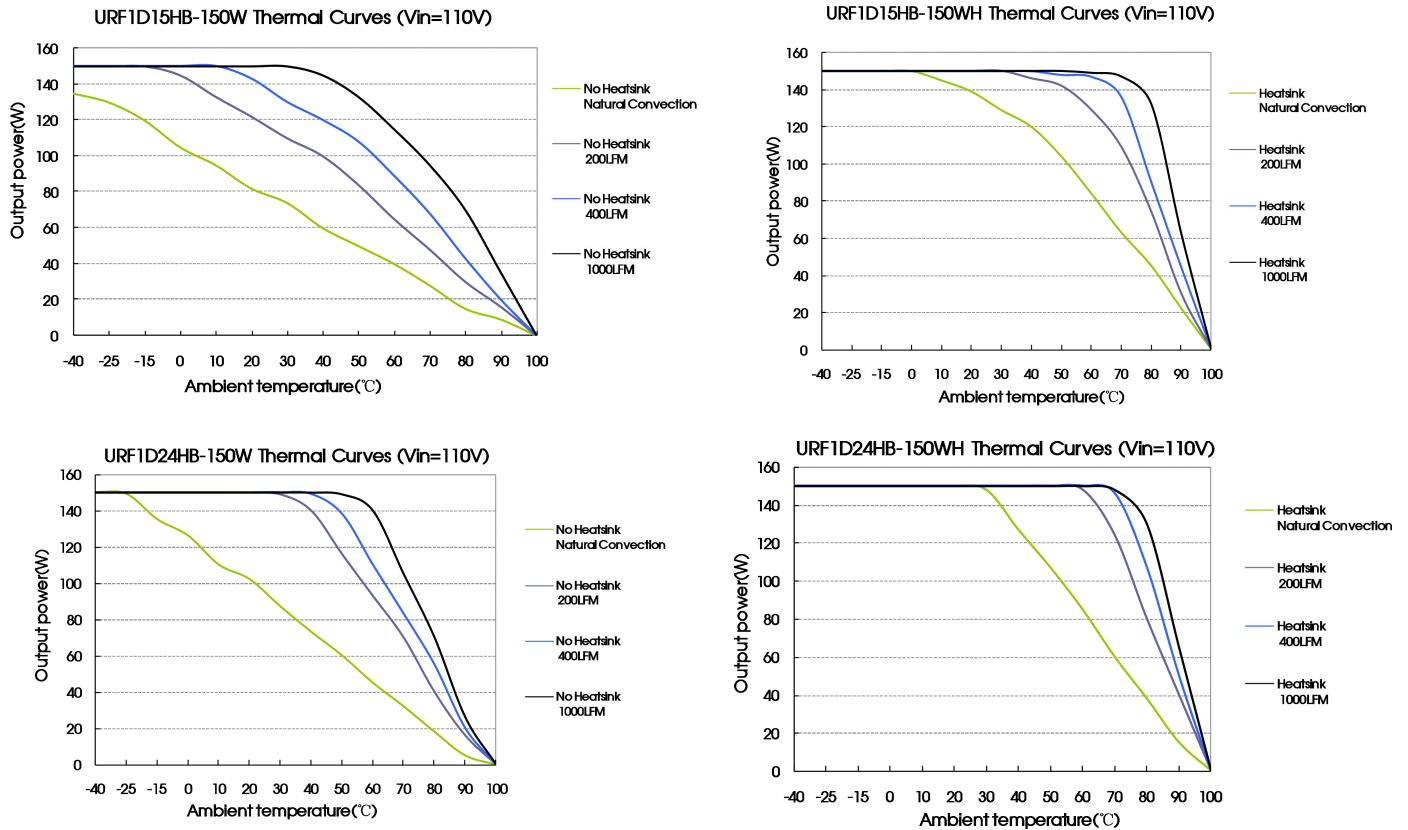


Fig. 1

Sense of application and precautions


1. When Remote Sense is not used

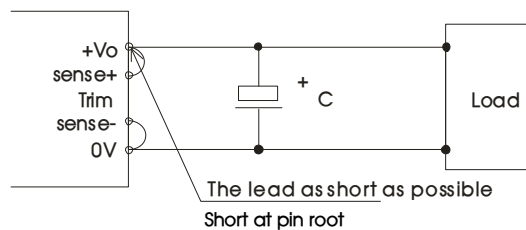

Notes:

- When remote sense is not used, make sure +Vo and Sense + are shorted, and that 0V and Sense- are shorted as well;
- Keep the patterns between +Vo and Sense + and 0V and Sense- as short as possible. Avoid a looping pattern. If noise enters the loop, the operation of the power module will become unstable.

2. When Remote Sense is used

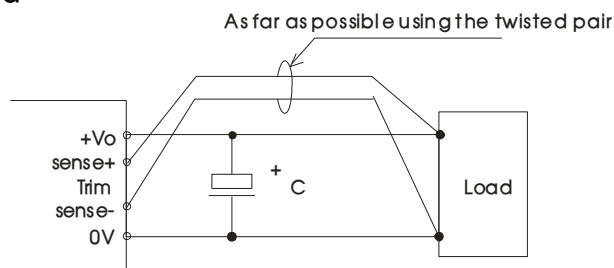

Notes:

- Using remote sense with long wires may cause output voltage to become unstable. Consult us if long sensing wiring is necessary.
- Sense patterns or wires should be as short as possible. If wires are used, use either twisted-pair or shielded wires.
- Please Use wide PCB trace or a thick wires between the power supply module and the load, the line voltage drop should be kept less than 0.3V. Make sure the power supply module's output voltage remains within the specified range.
- The impedance of wires may cause the output the voltage oscillation or have a greater ripple, please do adequate assessments before using.

Design Reference

1. Ripple & noise

All the URF1D_QB-100W series have been tested according to the following recommended test circuit before leaving the factory (see Fig. 2), Ripple & noise tested according to Fig. 3

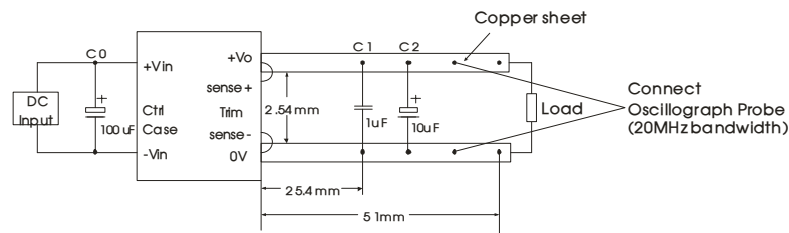


Fig. 2

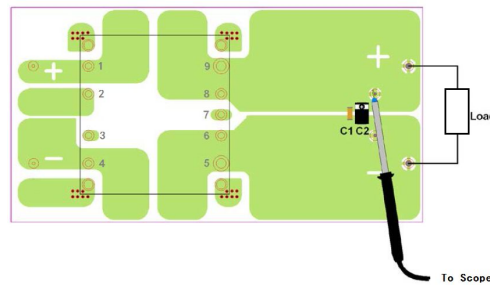


Fig. 3

Note: Capacitive value C1:1 μ F/50V; C2:10 μ F/35V.

2. Typical application

If not using our Mornsun's EMC recommended circuit, please ensure an 100 μ F electrolytic capacitors in parallel with the input, which used to suppress the surge voltage come from the input terminal.

If it is required to further reduce input and output ripple, properly increase the input & output of additional capacitors C_{in} and C_{out} or select capacitors of low equivalent impedance provided that the capacitance is no larger than the max. capacitive load of the product.



Capacitive		
Parameter	Cout(μF)	Cin(μF)
Output Voltage		
12V、15V、24V	220	100

3. EMC solution-module recommended circuit


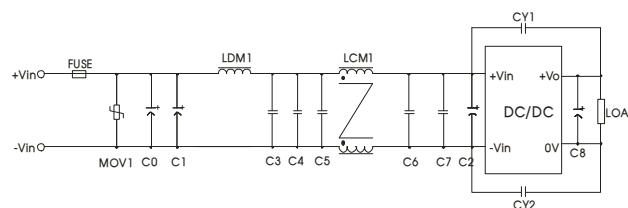


Fig. 4

Element model	Recommended value
FUSE	Choose according to actual input current
MOV1	S20K130 (Varistor)
C0	220uF/400V (electrolytic capacitor)
C1/C2	100uF/400V (electrolytic capacitor)
C3/C4/C5/C6/C7	2.2uF/250V
C8	220 uF/50V(electrolytic capacitor)
CY1	2200pF/400VAC (Y Safety capacitor)
CY2	3300pF/400VAC (Y Safety capacitor)
LDM1	10uH (Shielded inductor)
LCM1	1.0mH, recommended to use MORNSUN's FL2D-30-102

EMC solution-recommended circuit PCB layout

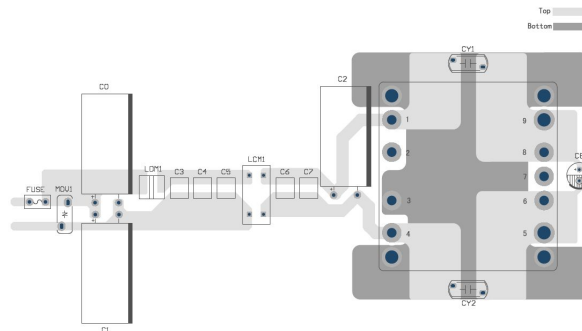

4. Thermal design

The maximum operating temperature of base-plate TB is 100 °C, as long as the user's thermal system keeps TB <100 °C, the converter can deliver its full rated power. A power derating curve can be calculated for any heatsink that is attached to the base-plate of the converter. It is only necessary to determine the thermal resistance, Rth(B-A), of the chosen heatsink between the base-plate and the ambient air for a given airflow rate. This information is usually available from the heatsink vendor. The following formula can be used to determine the maximum power the converter can dissipate for a given thermal condition if its base-plate is to be no higher than 100 °C.


$$P_{diss}^{max} = \frac{100^{\circ}\text{C} - T_A}{R_{th(B-A)}} \quad (T_A \text{ is ambient temperature})$$

The maximum load operating power of power supply module at a certain ambient temperature can be calculated by the power dissipation, Formula is as follows:

$$P_{O\max} = \frac{P_{diss}^{max}}{\left(\frac{1}{\eta} - 1\right)} \quad (\eta \text{ is converter efficiency})$$

Therefore, customers can according to the actual application to choose the right heatsink.

5. Application of Trim and calculation of Trim resistance



Applied circuits of Trim (Part in broken line is the interior of models)

Calculation formula of Trim resistance:

$$\begin{aligned} \text{up: } R_1 &= \frac{\alpha R_2}{R_2 - \alpha} - R_3 & \alpha &= \frac{V_{ref}}{V_o' - V_{ref}} \cdot R_1 \\ \text{down: } R_1 &= \frac{\alpha R_1}{R_1 - \alpha} - R_3 & \alpha &= \frac{V_o' - V_{ref}}{V_{ref}} \cdot R_2 \end{aligned}$$


Note: Value for R1, R2, R3, and Vref refer to the above table 1. R1: Resistance of Trim. α: User-defined parameter, no actual meanings. Vo': The trim up/down voltage.

table 1

Vo Parameter	12(VDC)	15(VDC)	24(VDC)
R1(KΩ)	11	14.49	24.87
R2(KΩ)	2.87	2.87	2.87
R3(KΩ)	17.8	20	20
Vref(V)	2.5	2.5	2.5




- It is not allowed to connect modules output in parallel to enlarge the power
- For more information about Mornsun EMC Filter products, please visit www.mornsun-power.com to download the Selection Guide of EMC Filter

Dimensions and Recommended Layout (Without heatsink)

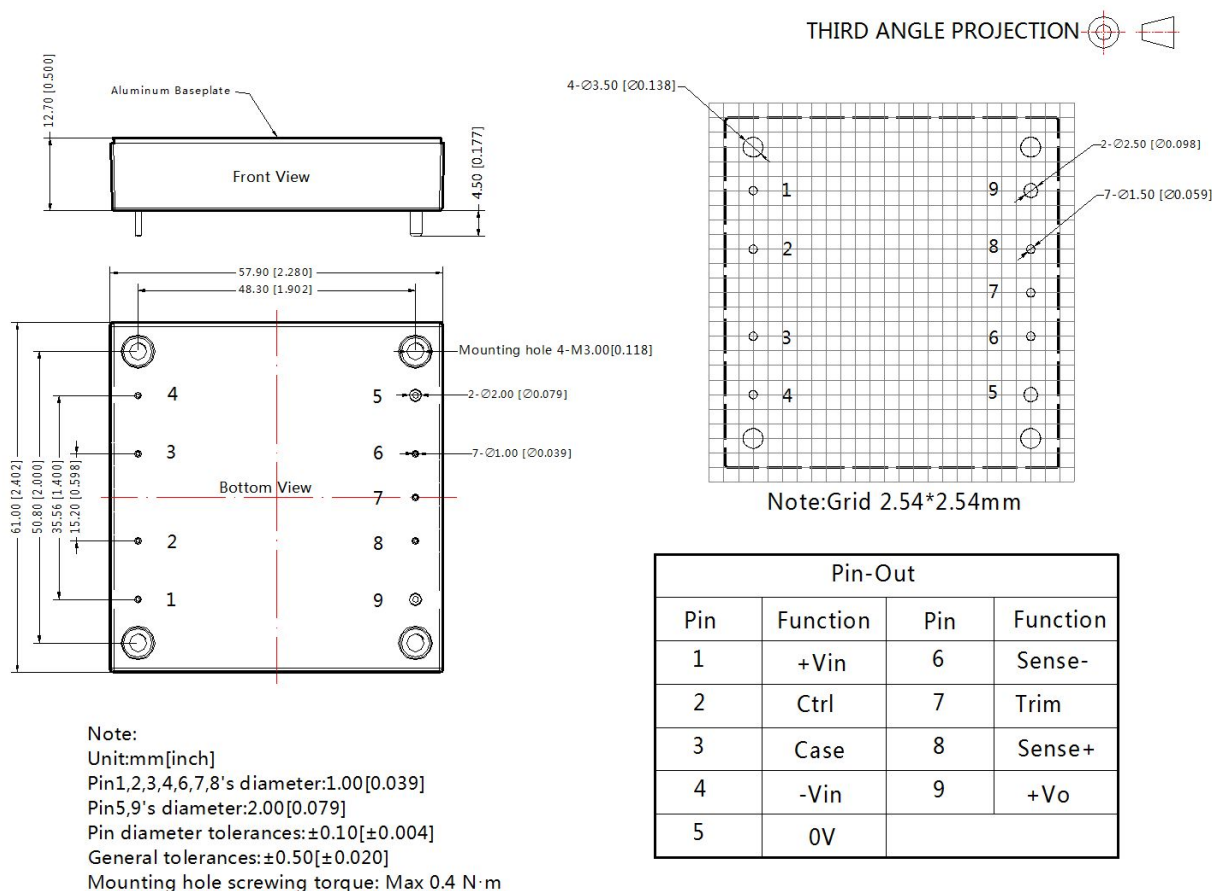

Dimensions (With heatsink)

THIRD ANGLE PROJECTION

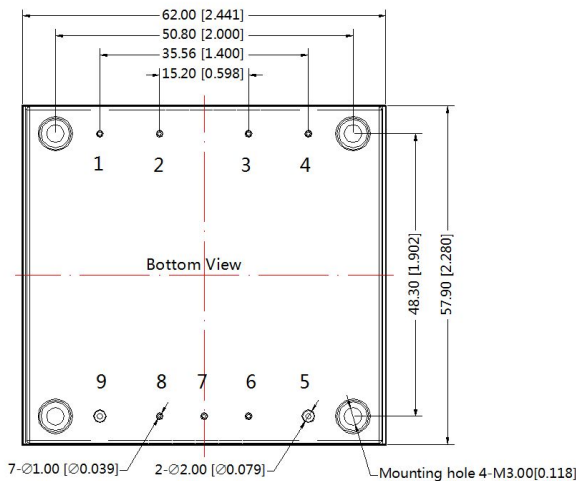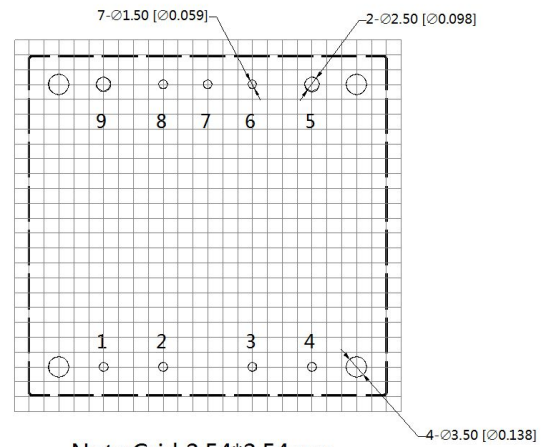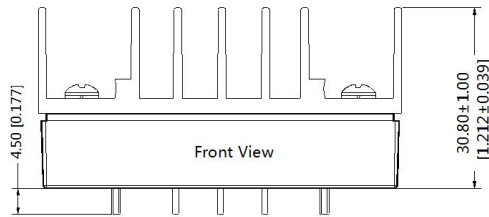

Note:
Unit:mm[inch]
Pin1,2,3,4,6,7,8's diameter:1.00[0.039]
Pin5,9's diameter:2.00[0.079]
Pin diameter tolerances:±0.10[±0.004]
General tolerances:±0.50[±0.020]
Mounting hole screwing torque: Max 0.4 N·m

Pin-Out			
Pin	Function	Pin	Function
1	+Vin	6	Sense-
2	Ctrl	7	Trim
3	Case	8	Sense+
4	-Vin	9	+Vo
5	0V		

Note

1. Packing information please refer to Product Packing Information which can be downloaded from www.mornsun-power.com. Packing bag number:58200069(without heatsink)、58200061(with heatsink);
2. The max capacitive load should be tested within the input voltage range and under full load conditions;
3. Recommends that customers plus silicone film or thermal grease between the module and the heatsink. In order to ensure good heat dissipation;
4. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25℃, humidity<75% with nominal input voltage and rated output load;
5. when used in lower than 10% load ,the ripple & noise index of the product is 3%Vo;
6. All index testing methods in this datasheet are based on our Company's corporate standards;
7. The performance parameters of the product models listed in this manual are as above, but some parameters of non-standard model products may exceed the requirements mentioned above. Please contact our technicians directly for specific information;
8. We can provide product customization service;
9. Specifications are subject to change without prior notice.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China
Tel: 86-20-38601850-8801 Fax: 86-20-38601272 E-mail: info@mornsun.cn

The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com