

Distributed by:



www.texim-europe.com



WINSTAR Display Co.,Ltd.
華凌光電股份有限公司



SPECIFICATION

MODEL NO. : WLOF00043000WGAAESA00

Summary

4.3 Inch Smart Display (CANopen series with GPIO) Feature


1. Input voltage dynamic range 5V to 28V, typical voltage 12V.
2. Self-testing after booting function.
3. CAN bus communication interface.
4. Support CANopen protocol, default baud rate at 250Kbps.
5. Built in 16MB flash memory, store the fonts and pictures.
6. Support capacitive touch panel (CTP).
7. Embedded buzzer function.
8. Demo set HOST can be used on multiple platforms, such as Computer (with USB to CAN Dongle), MCU, Raspberry Pi (with PiCAN2).
9. Supports 8 channel Bi-direction GPIOs with TTL 3.3V logic level. The setting functions through PC tools, Smart Display GUI Builder.

Product information

General information

Item	Standard Value	Unit
Operating voltage	5-28	Vdc
Communication Interface	CAN Bus	--
MCU	STM32F750	N/A
Flash Memory	16	MB
LCD display size	4.3	inch
Dot Matrix	480× 3(RGB) × 272	dot
Module dimension	119.3(W) ×67.2(H) ×13 (D)	mm
Active area	95.04(W) × 53.856 (H)	mm
Pixel pitch	0.198(H) x 0.198(V)	mm
Brightness	Min: 300; Typ: 400	cd/m ²
LCD type	TFT, Normally Black, Transmissive	
View Direction	80/80/80/80	
Aspect Ratio	16:9	
Touch Panel	With CTP	
Surface	Glare	

Contour Drawing

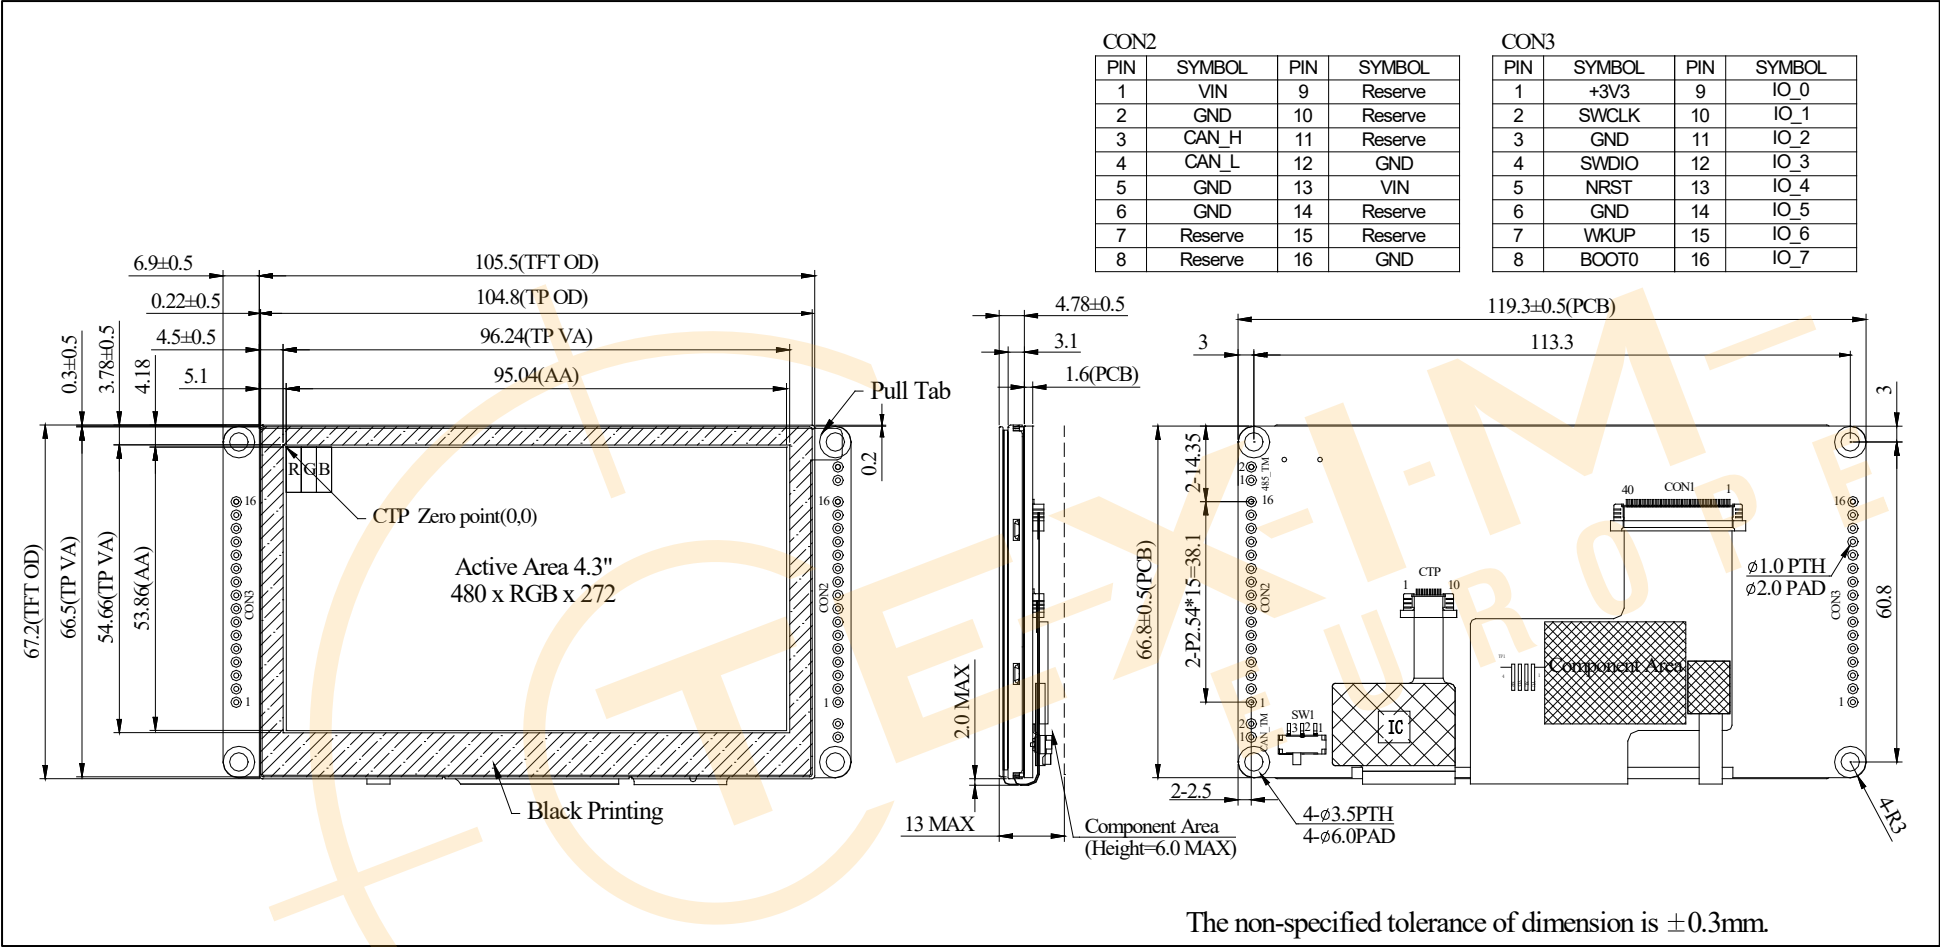

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-30	—	+80	°C
Storage Temperature	TST	-30	—	+80	°C

Electrical Characteristics

Item	Symbol	Min	Typ	Max	Unit
Supply Voltage	VCC	5	12	28	V
Supply Current	ICC		180		mA
I/O pin Voltage	--	--	--	3.3	V

BOM

Item	Description
LCM	WF43WTWAEDNGA#
PCBA	SV10004R300WB00N0104

Interface

CON2 definition:

Pin	Symbol	Function	Remark
16	GND	Power GND	Input
15	Reserved	--	--
14	Reserved	--	--
13	VIN	Power +5V~+28V	Input
12	GND	Power GND	Input
11	Reserved	--	--
10	Reserved	--	--
9	Reserved	--	--
8	Reserved	--	--
7	Reserved	--	--
6	GND	Power GND	Input
5	GND	Power GND	Input
4	CAN_L	CAN bus D-	BUS I/O
3	CAN_H	CAN bus D+	BUS I/O
2	GND	Power GND	Input
1	VIN	Power +5V~+28V	Input

CON3 definition:

Pin	Symbol	Function	Remark
16	IO_7	GPIO (PC5)	I/O
15	IO_6	GPIO (PC4)	I/O
14	IO_5	GPIO (PC1)	I/O
13	IO_4	GPIO (PF9)	I/O
12	IO_3	GPIO (PB5)	I/O
11	IO_2	GPIO (PB4)	I/O
10	IO_1	GPIO (PD5)	I/O
9	IO_0	GPIO (PD4)	I/O
8	BOOT0	--	--
7	WKUP	Wake UP (PA0)	Input
6	GND	Power GND	Output
5	NRST	Reset pin for SWD interface	Input

4	SWDIO	Data pin for SWD interface	I/O
3	GND	GND for SWD interface	Output
2	SWCLK	CLK pin for SWD interface	Input
1	+3V3	3.3V power for SWD interface	Output

CAN_{TM} definition:

Pin	Status	Function	Remark
1	Open	Switch off terminal resistance 120Ω	Default
2	Short	Activate terminal resistance 120Ω	--



Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.


It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

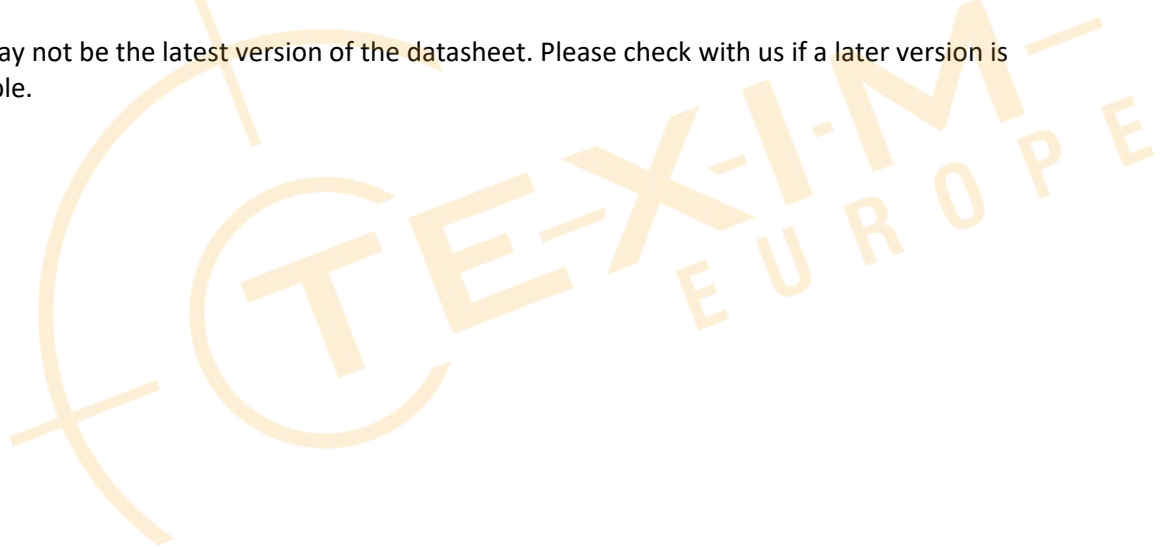



Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik

T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
E: austria@texim-europe.com



Nordic

Stockholmsgade 45
2100 Copenhagen

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com