

## REAL TIME CLOCK MODULE (SPI-Bus)

### Built-in 32.768 kHz-DTCXO, High Stability

# RX - 4803 SA/LC

- Built in frequency adjusted 32.768 kHz crystal unit and DTCXO.
  - 1/100s resolution Time register
  - Interface Type : 4-wire serial interface
  - Interface voltage range : 1.6 V to 5.5 V
  - Temp. compensated voltage range : 2.2 V to 5.5 V
  - Clock supply voltage range : 1.6 V to 5.5 V
  - Selectable clock output (32.768 kHz, 1024 Hz, 1 Hz)
  - The various functions include full calendar, alarm, timer, EVIN input.
- Epson is prepared Linux driver for this product.
- [http://www5.epsondevice.com/en/quartz/tech/linux\\_for\\_rtc/index.html](http://www5.epsondevice.com/en/quartz/tech/linux_for_rtc/index.html)
- The registered trademark Linux® is used pursuant to a sublicense from LMI (Linux Mark Institute)



Product Number (Please contact us)

**RX-4803SA: X1B000132xxxx00**

RX-4803LC: X1B000122xxxx00



Actual size

RX-4803SA


RX-4803LC

Distributed by:



[www.texim-europe.com](http://www.texim-europe.com)

## Block diagram

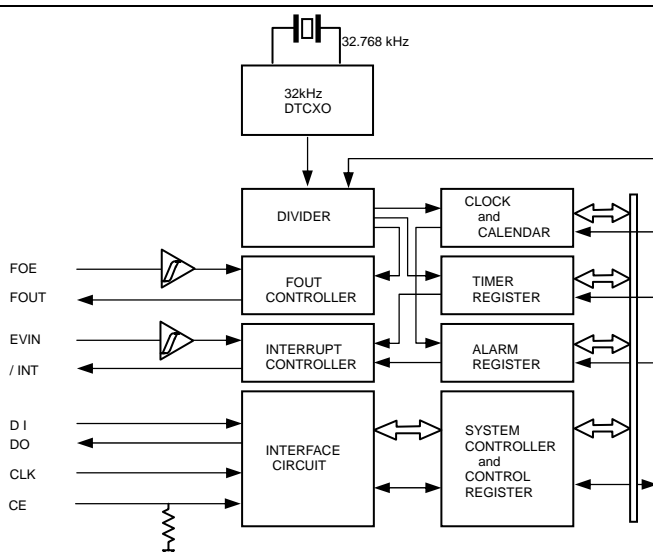

## Overview

- **High Stability**
  - UA  $\pm 3.4 \times 10^{-6}$  / -40 °C to +85 °C  
( Equivalent to 9 seconds of month deviation )
  - UB  $\pm 5.0 \times 10^{-6}$  / -40 °C to +85 °C  
( Equivalent to 13 seconds of month deviation )
  - UC  $\pm 5.0 \times 10^{-6}$  / -30 °C to +70 °C
  - AA  $(+5 \pm 5.0) \times 10^{-6}$  / +25 °C
- **High Resolution:** 1/100s Time register with capture buffer
- **32.768 kHz frequency output function**
  - FOUT pin output (C-MOS output), CL=30 pF
  - Output selectable: 32.768 kHz, 1024 Hz, 1 Hz
- **The various interrupt**
  - Timer Function can be set between 1/ 4096 second and 4095 minutes.
  - Alarm Function can be set to day of week, day, hour, or minute.
  - EVIN input.
- **Time synchronize function with 1PPS signal input**
- **Register compatibility:** upper compatible with RX-4801.


\*It is possible to use it by the terminal connection as 32.768 kHz-DTCXO.

### Pin Function

Signal Name	I / O	Function
CE	input	The chip enable input pin.
CLK	input	The shift clock input pin for serial data transfer.
FOUT	Output	The pin outputs the reference clock signal. ( CMOS output )
TEST	input	Use by the manufacture for testing. ( Do not connect externally. RX-4803SA only.)
V <sub>DD</sub>	-	Connected to a positive power supply
FOE	input	The input pin for the FOUT output control.
EVIN	input	External event input.
/ INT	Output	Interrupt output (N-ch. open drain).
GND	-	Connected to a ground
T2(V <sub>PP</sub> )	-	Use by the manufacture for testing. ( Do not connect externally.)
DO	Output	The data output pin for serial data transfer.
D I	input	The data input pin for serial data transfer.

### Terminal connection / External dimensions

(Unit:mm)

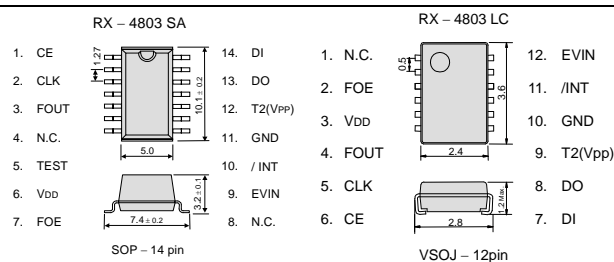

The metal case inside of the molding compound may be exposed on the top or bottom of this product. This purely cosmetic and does not have any effect on quality, reliability or electrical specs.

**\*Stop using the glue**

Any blue must never use it after soldering LC-package to a circuit board. This product has glass on the back side of a package. When glue invasions between circuit board side and glass side, then glass cracks by thermal expansion of glue. In this case a crystal oscillation stops. Consider glue abolition or glue do not touch to LC-package

### Specifications (characteristics)

\* Refer to application manual for details.


### ■ Electrical Characteristics

Item	Symbol	Conditions		Min.	Typ.	Max.	Unit
Interface voltage	V <sub>DD</sub>	Interface voltage		1.6	3.0	5.5	V
Temp. compensated Voltage	V <sub>TEM</sub>	Temp. compensated voltage		2.2	3.0	5.5	V
Clock supply voltage	V <sub>CLK</sub>	-		1.6	3.0	5.5	V
Operating temperature	T <sub>OPR</sub>	No condensation		-40	+25	+85	°C
Stability	Δ f / f	UA	Ta = -40 °C to +85 °C	±3.4 *1			× 10 <sup>-6</sup>
		UB	Ta = -40 °C to +85 °C	±5.0 *2			
		UC	Ta = -30 °C to +70 °C				
		AA	Ta = +25 °C	5 ± 5.0*3			
Current consumption (1)	I <sub>DD1</sub>	Backup Mode FOE = GND, /INT = V <sub>DD</sub> FOUT output : OFF	V <sub>DD</sub> = 5V	-	0.75	3.4	μA
Current consumption (2)	I <sub>DD2</sub>		V <sub>DD</sub> = 3V	-	0.75	2.1	

\*1) Equivalent to 9 seconds of month deviation. \*2) Equivalent to 13 seconds of month deviation.

\*3) Equivalent to 13 seconds of month deviation. ( excluding offset )

■ 32.768 kHz-DTCXO Frequency temperature characteristics (Example)

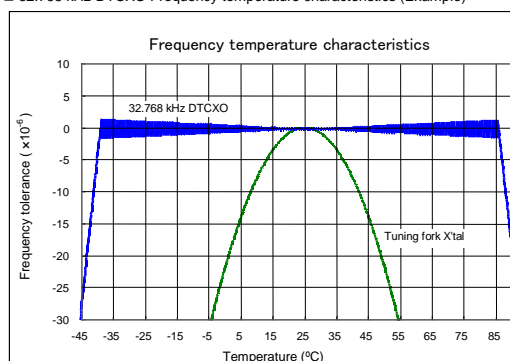

Distributed by:



[www.texim-europe.com](http://www.texim-europe.com)

## PROMOTION OF ENVIRONMENTAL MANAGEMENT SYSTEM CONFORMING TO INTERNATIONAL STANDARDS

At Seiko Epson, all environmental initiatives operate under the Plan-Do-Check-Action (PDCA) cycle designed to achieve continuous improvements. The environmental management system (EMS) operates under the ISO 14001 environmental management standard.

All of our major manufacturing and non-manufacturing sites, in Japan and overseas, completed the acquisition of ISO 14001 certification.

ISO 14000 is an international standard for environmental management that was established by the International Standards Organization in 1996 against the background of growing concern regarding global warming, destruction of the ozone layer, and global deforestation.

## WORKING FOR HIGH QUALITY

In order to provide high quality and reliable products and services than meet customer needs,

Seiko Epson made early efforts towards obtaining ISO9000 series certification and has acquired ISO9001 for all business establishments in Japan and abroad. We have also acquired ISO/TS 16949 certification that is requested strongly by major automotive manufacturers as standard.

ISO/TS16949 is the international standard that added the sector-specific supplemental requirements for automotive industry based on ISO9001.

### ► Explanation of the mark that are using it for the catalog

A blue square logo with a white leaf and the text "Pb Free".	► Pb free.
A blue square logo with a white leaf and the text "RoHS Compliant".	► Complies with EU RoHS directive. *About the products without the Pb-free mark. Contains Pb in products exempted by EU RoHS directive. (Contains Pb in sealing glass, high melting temperature type solder or other.)
A blue square logo with a white car and the text "For Automotive".	► Designed for automotive applications such as Car Multimedia, Body Electronics, Remote Keyless Entry etc.
A red square logo with a white car and the text "Automotive Safety".	► Designed for automotive applications related to driving safety (Engine Control Unit, Air Bag, ESC etc ).

## Notice

- This material is subject to change without notice.
- Any part of this material may not be reproduced or duplicated in any form or any means without the written permission of Seiko Epson.
- The information about applied circuitry, software, usage, etc. written in this material is intended for reference only. Seiko Epson does not assume any liability for the occurrence of infringing on any patent or copyright of a third party. This material does not authorize the licensing for any patent or intellectual copyrights.
- When exporting the products or technology described in this material, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
- You are requested not to use the products (and any technical information furnished, if any) for the development and/or manufacture of weapon of mass destruction or for other military purposes. You are also requested that you would not make the products available to any third party who may use the products for such prohibited purposes.
- These products are intended for general use in electronic equipment. When using them in specific applications that require extremely high reliability, such as the applications stated below, you must obtain permission from Seiko Epson in advance.
  - / Space equipment (artificial satellites, rockets, etc.) / Transportation vehicles and related (automobiles, aircraft, trains, vessels, etc.) / Medical instruments to sustain life / Submarine transmitters / Power stations and related / Fire work equipment and security equipment / traffic control equipment / and others requiring equivalent reliability.
- All brands or product names mentioned herein are trademarks and/or registered trademarks of their respective.

# TEXIM EUROPE

Partner in Electronic Components & Supply Chain Solutions



## The Netherlands

Elektrostraat 17  
NL-7483 PG Haaksbergen  
Tel: +31 (0)53 573 33 33  
Fax: +31 (0)53 573 33 30  
[nl@texim-europe.com](mailto:nl@texim-europe.com)



## Denmark

Sdr. Jagtvej 12  
DK-2970 Hørsholm  
Tel: +45 88 20 26 30  
Fax: +45 88 20 26 39  
[nordic@texim-europe.com](mailto:nordic@texim-europe.com)



## Belgium

Gentsesteenweg 1154-C22  
Chaussée de Gand 1154-C22  
B-1082 Brussel / Bruxelles  
Tel: +32 (0)2 462 01 00  
Fax: +32 (0)2 462 01 25  
[belgium@texim-europe.com](mailto:belgium@texim-europe.com)



## United Kingdom

St. Mary's House, Church Lane  
Carlton Le Moorland  
Lincoln LN5 9HS  
Tel: +44 (0)1522 789 555  
Fax: +44 (0)845 299 22 26  
[uk@texim-europe.com](mailto:uk@texim-europe.com)



## Germany

Bahnhofstrasse 92  
D-25451 Quickborn  
Tel: +49 (0)4106 627 07-0  
Fax: +49 (0)4106 627 07-20  
[germany@texim-europe.com](mailto:germany@texim-europe.com)



## Germany

Martin-Kollar-Strasse 9  
D-81829 München  
Tel: +49 (0)89 436 086-0  
Fax: +49 (0)89 436 086-19  
[germany@texim-europe.com](mailto:germany@texim-europe.com)



## Austria

Warwitzstrasse 9  
A-5020 Salzburg  
Tel: +43 (0)662 216026  
Fax: +43 (0)662 216026-66  
[austria@texim-europe.com](mailto:austria@texim-europe.com)

## Texim Europe B.V.

Elektrostraat 17  
NL-7483 PG Haaksbergen  
Tel: +31 (0)53 573 33 33  
[info@texim-europe.com](mailto:info@texim-europe.com)  
[www.texim-europe.com](http://www.texim-europe.com)

