


MIX-H310D2

Mini-ITX with Intel® 8th / 9th Generation Core™ LGA1151 Socket Processor, Max. 65W TDPs, USB 3.2 Gen 1 Port x 4, USB 2.0 Port x 5, 12V DC input

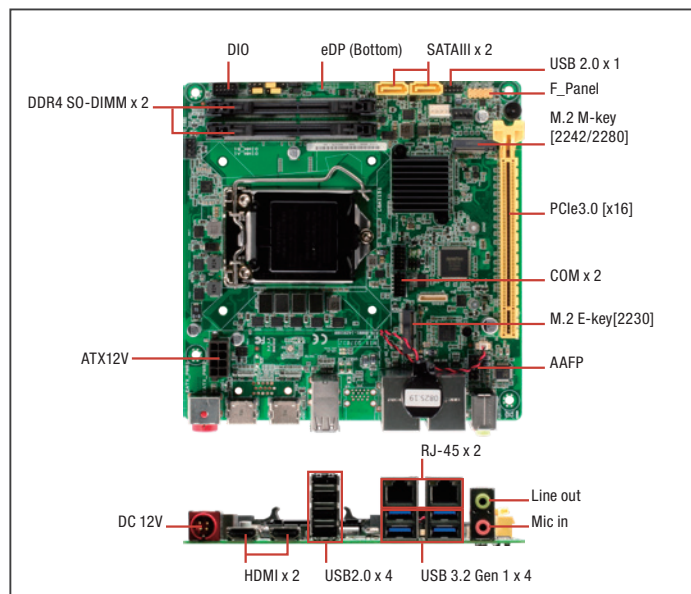


Specifications

System	
Processor	8th/9th Gen. Intel® Core™ LGA 1151 socket Processor (formerly Coffee Lake-S), Max. 65W TDPs
Chipset	Intel® H310 Express Chipset
Memory	DDR4 2666/2400/2133 MHz SODIMM x 2, Up to 64GB, Non-ECC, Un-buffered Memory, Dual channel memory architecture
I/O Chipset	NCT6793D
Ethernet	Intel® GbE LAN i219V x 1, Intel® GbE LAN i211AT x 1
Audio	Realtek® ALC887
TPM	NPCT750AABYX TPM2.0 (default: No)
Expansion Slots	PCIe3.0 [x16] x 1 M.2 E-key(22 x 30 mm) x1 for Wireless-wifi module (PCIe+USB; CNVi)
BIOS	256Mbit Flash ROM, AMI BIOS
H/W Monitor	Temperature Monitor on CPU/Chassis, Voltage Monitor on Vcore/5V/12V, Fan Monitor on CPU/Chassis
WatchDog Timer	1~255 steps by software program
Smart Fan Control	CPU Fan/ Chassis Fan
Wake On LAN/ PXE	Yes (WOL / PXE)
Power State	S3, S4, S5
Graphics	
Graphics Chipset	Intel® UHD Graphics
Graphics Multi Display	HDMI+HDMI, HDMI+eDP, HDMI+VGA, VGA+eDP
VGA	Up to 1920 x 1200 @ 60 Hz (Optional)
DVI	—
HDMI	Up to 3840 x 2160 @ 30 Hz (HDMI 1.4)
Display Port	—
LVDS	—
eDP	UP to 4096 x 2304 @ 60Hz
Backlight Control	Support eDP
Environment & Power & ME	
Battery	Lithium battery
Power Requirement	12V DC
Operation Temperature	32°F ~140°F (0°C ~ 60°C)
Storage Temperature	-40°F ~185°F (-40°C ~85°C)
Operation Humidity	0%~90%RH, non-condensing
Certificate	CE & FCC
Form Factor	Mini-ITX: 6.7" x 6.7" (170 mm x 170 mm)
Weight	1.1 lb (0.5 kg)
MTBF (Hours)	373,720

Features

- 8th /9th Gen. Intel® Core™ LGA1151 Processor
- DDR4 DRAM Support, 2666MHz, Max. 64GB
- M.2 Slot (M key; PCIe) x 1, M.2 Slot (E key) x 1
- USB 3.2 Gen 1 Port x 4, USB 2.0 Port x 5
- Intel® Gigabit Ethernet x 2
- SATA 6.0 Gb/s x 2
- PCI-Express [x16] (Gen3) x 1
- 12VDC input



Rear Panel I/O Ports

USB	USB 3.2 Gen 1 x 4, USB 2.0 x 4
Display I/O	HDMI x 2, VGA x 1 (Optional)
Audio I/O	Mic-in x 1, Line-out x 1
LAN I/O	LAN (RJ-45) port x 2
Serial Port	—
PS/2 Port	—
Others	12V DC Jack (max:192W)

Internal I/O Connectors


Storage	SATA3.0 (6.0Gb/s) x 2 M.2 M-key (22 x 42/80mm; PCIe) x 1
USB	USB 2.0 (2 x 5-pin, 2.00mm) x 1 port support additional 1 USB
Display I/O	eDP x 1
Audio I/O	AAFP x 1
Serial Port	Boxer header for COM (RS-232) x 1; RS-232/422/485 x 1
PS/2 Port	—
Parallel Port	—
DIO	Digital I/O box header x 1
FAN	4-pin CPU Fan connector x 1, 4-pin Chassis Fan connector x 1
Power	—
Others	Front Panel connector x 1, Chassis Intrusion x 1, Buzzer onboard x 1, CMOS jumper x 1, ATX/AT mode select x 1, ME disable x 1, eDP Tcon IC voltage select x 1, eDP panel backlight voltage select x 1, COM RI select jumper x 1, SATA PWR x 1
OS	
OS Support	Windows® 10 64-bit, Linux Ubuntu 18.04.2

Packing List

- SATA Cable
- SATA Power Cable
- I/O Shield
- MIX-H310D2




Block Diagram

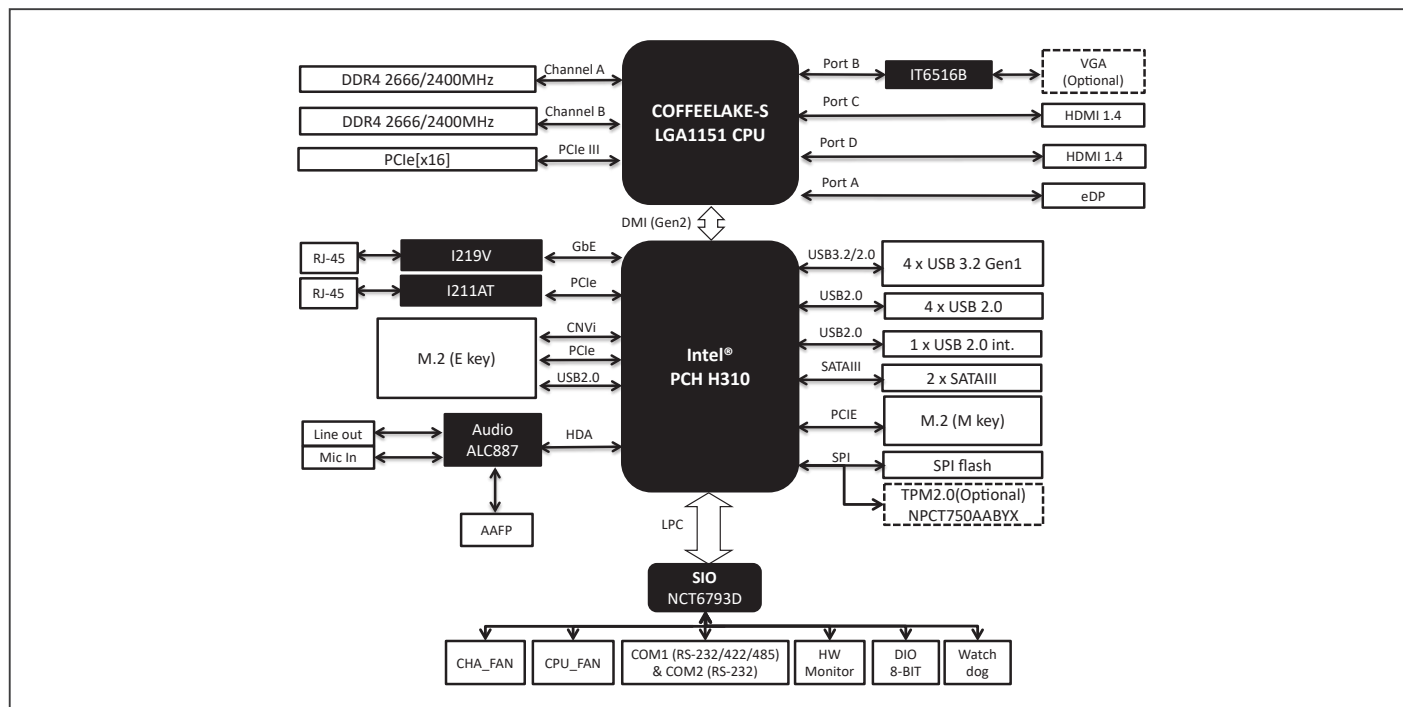

Dimension

Unit: mm

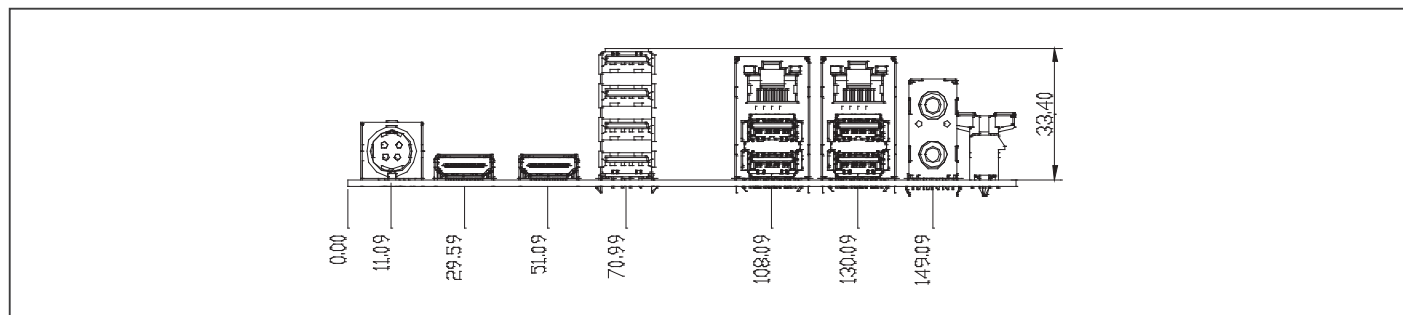

Ordering Information

Part number	CPU	RAM	Fan/Fanless	Display	Storage	LVDS	LAN	USB	RS-232	RS-232/422/485	Expansion Slot	Power	TPM	Temp.
MIX-H310D2-A10	Socket	SODIMM x 2	Fan	HDMI x 2 eDP	SATA3 x 2 M.2(M-key) x 1	—	GbE x 2	USB2.0 x 5, USB3.2 Gen 1 x 4	1	1	PCIe3.0[x16] x 1, M.2(E-Key) x 1	12V DC	—	32°F ~140°F (0°C ~ 60°C)

Optional Accessories

Part Number	Description
1759200172	CPU Cooler (2-Ball, Screw with Retention Plate)
175921156B	CPU Cooler (2-Ball, Push-pin Type)
COOLER-65W-01	CPU Cooler, LGA 1156, 12V, 65W, 4P, Kingcooler, 0571-1463R
1709100201	USB 2.0 Cable (10P, 200MM, p=2.00mm, w/bracket)
1701100206	COM Cable (200MM, p=2.00mm)
1709050201	USB 2.0 Cable (5P, 220mm, p=2.00mm)
1255X00011	(TF)AC/DC Adapter.12V.192W.16A.FSP192-AHAN3.9NA1920100

The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

Italy



Via Matteotti 43
IT-20864 Agrate Brianza (MB)

T: +39 (0)39 971 3293
F: +39 (0)39 971 3293
E: italy@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com