

Distributed by:



PURIXEL

Purechem Co.,Ltd. Company Report



Distributed by:



PURIXEL PACKING

Radial Type Packing

FIGURE 1
Radial type(vinyl bag)




FIGURE 2
Radial type(Inner box)


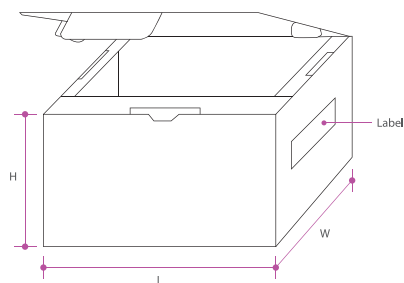


FIGURE 3
Radial type(Middle box)



Dimension(Middle box)

ΦD × L	Width	Height	Height	Q'ty(pcs)
08x20	470	300	305	9,600
10x20	470	300	305	6,400
10x30	470	300	305	4,800
12.5x25	470	300	305	4,000
16x25	470	300	305	2,000
18x32	470	300	305	1,600
18x40	470	300	305	1,200
22x45	470	300	305	600
08x20 (module)	470	300	305	4,800
10x20 (module)	470	300	305	3,200
10x30 (module)	470	300	305	2,000

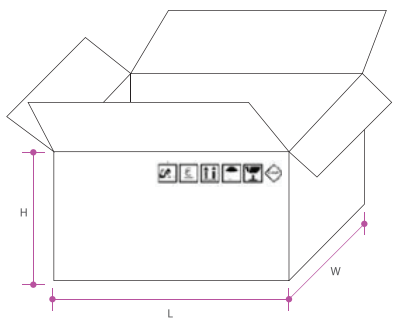

PEC

Radial Type
Standard Series

Features

- Endurance : 2.7V 65°C 1500 hours
- Small size, high capacitance and low resistance
- Longer cycle life than other secondary batteries



Characteristics

Operating Temperature Range	-40 ~ +65°C	
Rated Voltage	2.7VDC	
Capacitance Tolerance	-10 ~ +20%	
Temperature Characteristics	Capacitance change	Within ± 5% of initial value at +25°C
	Internal resistance	Within ± 50% of initial value at +25°C
Endurance	Duration	1500 hours
	Capacitance change	Within ≤ 30 % of initial value
	Internal resistance	Within ≤ 100 % of initial specified value
Shelf Life	After 1500 hours no load test same as endurance	
Life Time at RT ⁽¹⁾	10 years	(1) $ \Delta C \leq 30\%$ of initial value and $ \Delta ESR \leq 100\%$ initial specified value
Cycle Life(25°C) ⁽¹⁾⁽²⁾	500,000 cycles	(2) Cycle : between rated voltage and half rated voltage under constant current at 25°C

Applications

Remote Control
Self Charge

Wireless & Setop Box
Back up

Notebook & Tablet PC
Memory Backup

Electronic Device & Tools
Back up Power
Stand

Black Box & Car Audio
Recorder
Battery Assist


Power Saving SMPS

Copy Machine
Heating Backup

Digital Camera

Dimensions

unit(mm)			
ØD	P	d	β
8	3.5	0.6	1.5
10	5.0	0.6	
12.5	5.0	0.6	2.0
16	7.5	0.8	
18	7.5	0.8	
22	10.0	1.0	3.0

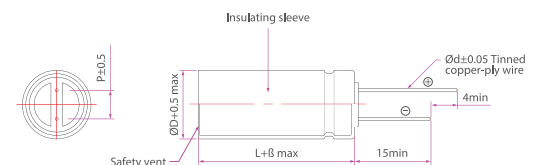

Specifications

Rated Voltage (V)	Capacitance (F)	ESR, 1kHz (mΩ)	ESR, DC (mΩ)	LC (72hr) (mA Max.)	Specific Energy (Wh/kg)	Specific Power (kW/kg)	Max. Peak Current (A)	Weight (g)	Volume (mL)	Dimension(mm) D x L	PART No.
2.7V	3	45	70	0.007	2.17	18.60	3.35	1.40	1.00	8 x 20	PEC02R7SN30508020
	5	40	45	0.010	2.41	19.29	5.51	2.10	1.57	10 x 20	PEC02R7SN50510020
	10	25	40	0.023	3.07	13.81	9.64	3.30	2.36	10 x 30	PEC02R7SN10610030
	15	20	35	0.030	3.38	11.57	13.28	4.50	3.07	12.5 x 25	PEC02R7SN15612525
	25	15	25	0.045	3.47	9.99	20.77	7.30	5.02	16 x 25	PEC02R7SN25616025
	33	13	20	0.060	3.34	9.11	26.84	10.00	8.14	18 x 32	PEC02R7SN33618032
	50	9	15	0.075	3.89	9.35	38.57	13.00	10.17	18 x 40	PEC02R7SN50618040
	100	8	13	0.180	4.82	6.68	58.70	21.00	17.10	22 x 45	PEC02R7SN10722045

Part Number

P E C

Series Code

0 2 R 7

Voltage, Terminal Symbol

S

Cell type

N

Class

3 0 5

Cap. Symbol

0 8 0 2 0


D Size x L Size

PVC

Radial Type
Standard Series

Features

- Endurance : 3.0V 65°C 1000 hours
- Small size, high capacitance and low resistance
- Longer cycle life than other secondary batteries

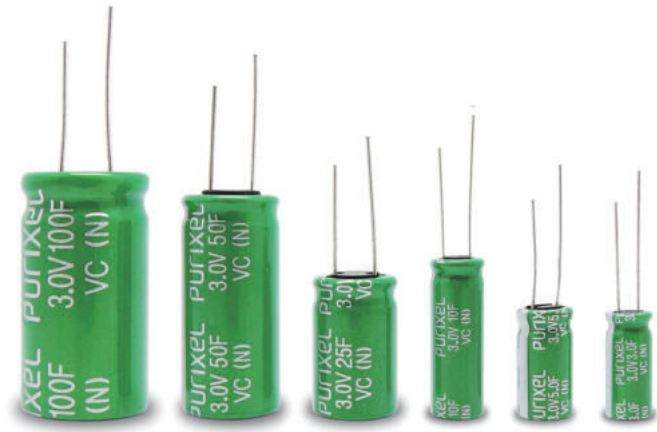

Characteristics

Operating Temperature Range	-40 ~ +65°C	
Rated Voltage	3.0 VDC	
Capacitance Tolerance	-10 ~ +20%	
Temperature Characteristics	Capacitance change	Within $\pm 5\%$ of initial value at +25°C
	Internal resistance	Within $\pm 50\%$ of initial value at +25°C
Endurance	Duration	1000 hours
	Capacitance change	Within $\leq 30\%$ of initial value
	Internal resistance	Within $\leq 100\%$ of initial specified value
Shelf Life	After 1000 hours no load test same as endurance	
Life Time at RT ⁽¹⁾	10 years	(1) $ \Delta C \leq 30\%$ of initial value and $ \Delta ESR \leq 100\%$ initial specified value
Cycle Life(25°C) ⁽¹⁾⁽²⁾	500,000 cycles	(2) Cycle : between rated voltage and half rated voltage under constant current at 25°C

Applications

Remote Control
Self Charge

Wireless & Setop Box
Back up

Notebook & Tablet PC
Memory Backup

Electronic Device & Tools
Back up Power
Stand

Black Box & Car Audio
Recorder
Battery Assist


Power Saving SMPS

Copy Machine
Heating Backup

Digital Camera

Dimensions

unit(mm)			
ØD	P	d	β
8	3.5	0.6	1.5
10	5.0	0.6	
12.5	5.0	0.6	2.0
16	7.5	0.8	
18	7.5	0.8	
22	10.0	1.0	3.0

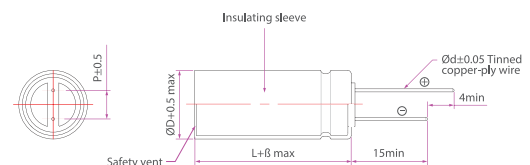

Specifications

Rated Voltage (V)	Capacitance (F)	ESR, 1kHz (mΩ)	ESR, DC (mΩ)	LC (72hr) (mA Max.)	Specific Energy (Wh/kg)	Specific Power (kW/kg)	Max. Peak Current (A)	Weight (g)	Volume (mL)	Dimension(mm) D x L	PART No.
3.0V	3	45	70	0.010	2.34	20.09	3.72	1.60	1.00	8 x 20	PVC03R05N30508020
	5	40	45	0.015	2.72	21.74	6.12	2.30	1.57	10 x 20	PVC03R05N50510020
	10	25	40	0.030	3.57	16.07	10.71	3.50	2.36	10 x 30	PVC03R05N10610030
	15	20	35	0.050	4.17	14.29	14.75	4.50	3.07	12.5 x 25	PVC03R05N15612525
	25	15	25	0.070	4.17	12.00	23.08	7.50	5.02	16 x 25	PVC03R05N25616025
	33	13	20	0.100	4.08	11.14	29.82	10.10	8.14	18 x 32	PVC03R05N33618032
	50	10	15	0.150	4.63	11.11	42.86	13.50	10.17	18 x 40	PVC03R05N50618040
	100	8	13	0.300	5.95	8.24	65.22	21.00	17.10	22 x 45	PVC03R05N10722045

Part Number

P V C

Series Code

0 3 R 0

Voltage, Terminal Symbol

S

Cell type

N

Class

3 0 5

Cap. Symbol

0 8 0 2 0

D Size x L Size

PTC

Radial Type
Standard Series

Features

- Endurance : 2.7V 85°C 1000 hours
- Small size, high capacitance and low resistance
- Longer cycle life than other secondary batteries



Characteristics

Operating Temperature Range	-40 ~ +85°C	
Rated Voltage	2.7 VDC	
Capacitance Tolerance	-10 ~ +20%	
Temperature Characteristics	Capacitance change	Within ± 5% of initial value at +25°C
	Internal resistance	Within ± 50% of initial value at +25°C
Endurance	Duration	1000 hours
	Capacitance change	Within ≤ 30 % of initial value
	Internal resistance	Within ≤ 200 % of initial specified value
Shelf Life	After 1000 hours no load test same as endurance	
Life Time at RT ⁽¹⁾	10 years	(1) ΔC ≤ 30% of initial value and ΔESR ≤ 200% initial specified value
Cycle Life(25°C) ⁽¹⁾⁽²⁾	500,000 cycles	(2) Cycle : between rated voltage and half rated voltage under constant current at 25°C

Applications

Remote Control
Self Charge

Wireless & Setop Box
Back up

Notebook & Tablet PC
Memory Backup

Electronic Device & Tools
Back up Power
Stand

Black Box & Car Audio
Recorder
Battery Assist


Power Saving SMPS

Copy Machine
Heating Backup

Digital Camera

Dimensions

unit(mm)			
ØD	P	d	β
8	3.5	0.6	1.5
10	5.0	0.6	
12.5	5.0	0.6	2.0
16	7.5	0.8	
18	7.5	0.8	
22	10.0	1.0	3.0

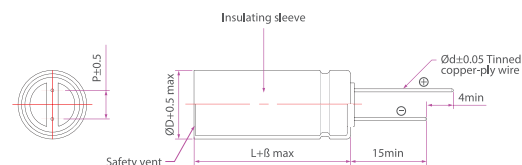

Specifications

Rated Voltage (V)	Capacitance (F)	ESR, 1kHz (mΩ)	ESR, DC (mΩ)	LC (72hr) (mA Max.)	Specific Energy (Wh/kg)	Specific Power (kW/kg)	Max. Peak Current (A)	Weight (g)	Volume (mL)	Dimension(mm) D x L	PART No.
2.7V	3	45	70	0.010	1.90	16.27	3.35	1.60	1.00	8 x 20	PTC02R7SN30508020
	5	40	45	0.015	2.20	17.61	5.51	2.30	1.57	10 x 20	PTC02R7SN50510020
	10	25	40	0.030	2.89	13.02	9.64	3.50	2.36	10 x 30	PTC02R7SN10610030
	15	20	35	0.050	3.38	11.57	13.28	4.50	3.07	12.5 x 25	PTC02R7SN15612525
	25	15	25	0.070	3.38	9.72	20.77	7.50	5.02	16 x 25	PTC02R7SN25616025
	33	13	20	0.100	3.31	9.02	26.84	10.10	8.14	18 x 32	PTC02R7SN33618032
	50	10	15	0.150	3.75	9.00	38.57	13.50	10.17	18 x 40	PTC02R7SN50618040
	100	8	13	0.300	4.82	6.68	58.70	21.00	17.10	22 x 45	PTC02R7SN10722045

Part Number

P T C

Series Code

0 2 R 7

Voltage, Terminal Symbol

S

Cell type

N

Class

3 0 5

Cap. Symbol

0 8 0 2 0

D Size x L Size

PEC

Module Type
Standard Series

Features

- Endurance : 5.4V 65°C 1500 hours
- Small size, high capacitance and low resistance
- Longer cycle life than other secondary batteries

Characteristics

Operating Temperature Range	-40 ~ +65°C	
Rated Voltage	5.4 VDC	
Capacitance Tolerance	-10 ~ +20%	
Temperature Characteristics	Capacitance change	Within ± 5% of initial value at +25°C
	Internal resistance	Within ± 50% of initial value at +25°C
Endurance	Duration	1500 hours
	Capacitance change	Within ≤ 30 % of initial value
	Internal resistance	Within ≤ 100 % of initial specified value
Shelf Life	After 1500 hours no load test same as endurance	
Life Time at RT ⁽¹⁾	10 years	(1) ΔC ≤30% of initial value and ΔESR ≤100% initial specified value
Cycle Life(25°C) ⁽¹⁾⁽²⁾	500,000 cycles	(2) Cycle : between rated voltage and half rated voltage under constant current at 25°C

Applications

Remote Control
Self Charge

Wireless & Setop Box
Back up

Notebook & Tablet PC
Memory Backup

Electronic Device & Tools
Back up Power
Stand

Black Box & Car Audio
Recorder
Battery Assist

Power Saving SMPS

Copy Machine
Heating Backup


Digital Camera

Dimensions


unit(mm)

Type C	Type S	Type H	Ød	Single Cell Size ØD x L
4.9	12.2	8.5	0.6	8 x 20
5.5	15.5	10.5	0.6	10 x 20
5.5	15.5	10.5	0.6	10 x 30


Module Type - C

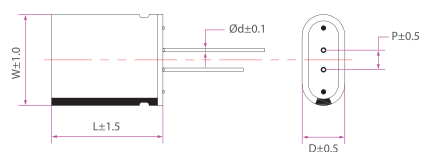

Module Type - S

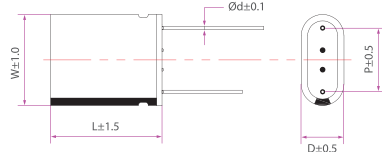

Module Type - H

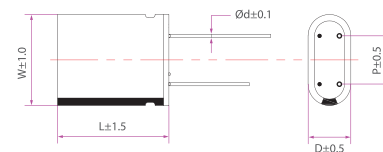

Specifications

Rated Voltage (V)	Capacitance (F)	ESR, 1kHz (mΩ)	ESR, DC (mΩ)	LC (72hr) (mA Max.)	Specific Energy (Wh/kg)	Specific Power (kW/kg)	Max. Peak Current (A)	Weight (g)	Dimension(mm) L x W x D	PART No.
5.4V	1.5	90	140	0.015	1.79	15.32	3.35	3.40	22.0 x 17.0 x 8.5	PEC05H4MN15508020
	2.5	80	90	0.020	2.03	16.20	5.51	5.00	22.0 x 21.0 x 10.5	PEC05H4MN25510020
	5.0	50	80	0.046	2.89	13.02	9.64	7.00	32.0 x 21.0 x 10.5	PEC05H4MN50510030

Part Number

P E C

Series Code

0 5 H 4

Voltage, Terminal Symbol

M

Cell type

N

Class

1 5 5

Cap. Symbol

0 8 0 2 0

D Size x L Size

Distributed by:



www.pureechem.com

PVC

Module Type
Standard Series

Features

- Endurance : 6.0V 65°C 1000 hours
- Small size, high capacitance and low resistance
- Longer cycle life than other secondary batteries

Characteristics

Operating Temperature Range	-40 ~ +65°C	
Rated Voltage	6.0 VDC	
Capacitance Tolerance	-10 ~ +20%	
Temperature Characteristics	Capacitance change	Within ± 5% of initial value at +25°C
	Internal resistance	Within ± 50% of initial value at +25°C
Endurance	Duration	1000 hours
	Capacitance change	Within ≤ 30 % of initial value
	Internal resistance	Within ≤ 100 % of initial specified value
Shelf Life	After 1000 hours no load test same as endurance	
Life Time at RT ⁽¹⁾	10 years	(1) ΔC ≤30% of initial value and ΔESR ≤100% initial specified value
Cycle Life(25°C) ⁽¹⁾⁽²⁾	500,000 cycles	(2) Cycle : between rated voltage and half rated voltage under constant current at 25°C

Applications

Remote Control
Self Charge

Wireless & Setop Box
Back up

Notebook & Tablet PC
Memory Backup

Electronic Device & Tools
Back up Power
Stand

Black Box & Car Audio
Recorder
Battery Assist

Power Saving SMPS

Copy Machine
Heating Backup


Digital Camera

Dimensions


unit(mm)

Type C	P		Ød	Single Cell Size ØD x L
	Type S	Type H		
4.9	12.2	8.5	0.6	8 x 20
5.5	15.5	10.5	0.6	10 x 20
5.5	15.5	10.5	0.6	10 x 30


Module Type - C

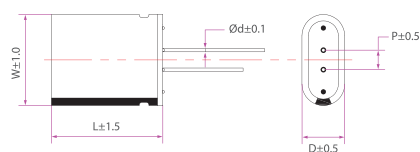

Module Type - S

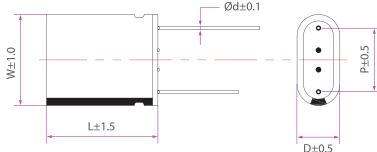

Module Type - H

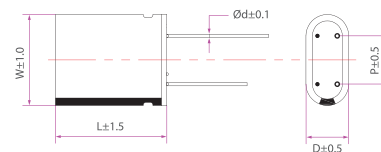

Specifications

Rated Voltage (V)	Capacitance (F)	ESR, 1kHz (mΩ)	ESR, DC (mΩ)	LC (72hr) (mA Max.)	Specific Energy (Wh/kg)	Specific Power (kW/kg)	Max. Peak Current (A)	Weight (g)	Dimension(mm) L x W x D	PART No.
6.0V	1.5	90	140	0.015	2.21	18.91	3.72	3.40	22.0 x 16.0 x 8.5	PVC06H0MN15508020
	2.5	80	90	0.020	2.50	20.00	6.12	5.00	22.0 x 21.0 x 10.5	PVC06H0MN25510020
	5.0	50	80	0.060	3.57	16.07	10.71	7.00	32.0 x 21.0 x 10.5	PVC06H0MN50510030

Part Number

P V C

Series Code

0 6 H 0

Voltage, Terminal Symbol

M

Cell type

N

Class

1 5 5

Cap. Symbol

0 8 0 2 0

D Size x L Size



Pureechem Co.,Ltd.

충북 청주시 서원구 남이면 남석로 151-35

Add. 151-35, Namseok-ro, Nami-myeon, Seowon-gu, Cheongju-si, Chungcheongbuk-do, Korea (28182)

Tel. + 82. 43. 268. 7311

Fax. + 82. 43. 268. 7312

www.pureechem.com

The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

Italy



Via Matteotti 43
IT-20864 Agrate Brianza (MB)

T: +39 (0)39 971 3293
F: +39 (0)39 971 3293
E: italy@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com