

# TECHNICAL SPECIFICATION

Lithium Thionyl Chloride Battery

外发文件  
外发编号:FAT-W-20250827007

受控文件

Model: ER18505H-2

Established date: 15 May,2024

	Position	Signature
Draft	Product Engineer	Liu Shaoping
Checked	Technical Manager	Zhu Zhi gang
Approved	Chief Engineer	Liu peng

Customer signature	
Company name :	<div style="border: 1px solid blue; padding: 5px; text-align: center;">                     Distributed by:    <a href="http://www.texim-europe.com">www.texim-europe.com</a> </div>
Approved by :	
Signature date :	

WUHAN FANSO TECHNOLOGY CO.,LTD.

Floor 2, Building 3, Jiahua Technology Industrial Park, No. 270, Huangjinkou Three Village, Hanyang District, Wuhan City, China

Postal Code: 434000 Tel: 027-84453199



### 1. Scope

The document applies to ER18505H-2(Li/SOCl<sub>2</sub>) battery pack supplied by FANSO TECHNOLOGY CO.,LTD. Specify quality, test method, performance, quality assurance and matters need attention etc..

### 2. Battery type

Lithium Thionyl Chloride

### 3. Battery system characteristics

Table 1 General characteristics

No.	Item	Characteristic	Remarks
1	Nominal Voltage	3.6V	
2	Nominal Capacity	8000mAh	23±3°C,6mA,2.0V cut off
5	Operate temperature	-55~+85°C	Operation under higher temperature than ambient temperature may lead to reduced capacity and lower voltage reading at the beginning of pulses. If continuous high temperature over +40°C or low temperature down to -20°C usage conditions, please consult FANSO.
6	Dimension (max)	/	See attached dimension image
7	Weight	About 57g	
8	Annual self-discharge rate	≤1%	At 23±3°C and humidity 65±10% RH long time storage

Table 2 Typical electrical performances

No.	Item	Characteristic	Remarks
1	Open Circuit Voltage	≥3.64V	23±3°C,by three and half digital meter
2	Load voltage	≥3.20V	23±3°C,100Ω, discharge 2s
3	Capacity	6200mAh	23±3°C,50mA,2.0V cut off

## 4. Appearance and structure

### 4.1 Appearance

ER18505H-2 Cell appearance, no scratch, swelling, deformation, corrosion, electrolyte leakage and other defects.

### 4.2 Structure

ER18505H-2 is “bobbin design” cell, whose cathode is cylindrical in shape.

Hermetic is ensured by a glass-to-metal sealing technology.(under a standard helium pressure, leakage rate  $\leq 10^{-8} \text{Pa} \cdot \text{m}^3/\text{sec}$ ).

### 4.3 Product mark

#### 4.3.1 Battery' s label specification

- ① type                      ② nominal voltage      ③ positive and negative electrode mark
- ④ date code                ⑤ safety warning

#### 4.3.2 Date code:

Date code will be marked on the sleeve of battery.

Method: MM YY      “MM” stand for: month;      “YY” stand for: year

## 5. Incoming inspection and Capacity judgment

### 5.1 Incoming inspection

As for the customer's incoming inspection, FANSO recommended sampling according to GB2828.1-2012 standard.

Table 3 Acceptability quality level

NO.	Item	Check level	AQL
1	Dimension	S-2	0.65

2	Appearance	II	1.0
3	Open circuit voltage	II	0.4
4	Load voltage	II	0.4

Table 4 Sampling amount

Lot size	Sampling amount
≤3200	32
3200~10000	50
>10000	80

Note:Unless other specified, the above items should be tested within 45 days since receipt of the battery.

## 5.2 Capacity judgment

5.2.1 If the average capacity is not less than the standard value specified in Table 2, and no battery below 90% of the value, the battery capacity is qualified.

5.2.2 If the average capacity is lower than the standard value specified in Table 2, and some battery below 90% of the value, do re-sample test, If the average capacity is not less than the standard value specified in Table 2, and no battery below 90% of the value, the battery capacity is qualified.

5.2.3 If the average capacity is lower than the standard value specified in Table 2 and some battery below 90% of the value during the second test, the battery capacity is unqualified.

## 6. Safety terms

6.1 Before use, do not remove the battery from the original packaging.

6.2 Do not scattered placed the battery together in order to avoid accidental short circuit.

- 6.3 Do not heat the battery above 100 °C or incinerated.
- 6.4 Do not recharge the battery.
- 6.5 Do not mixed with different brand, model or type batteries.
- 6.6 Do not mix the new and used batteries.
- 6.7 Do not disassembly or open battery.
- 6.8 Do not short circuit the battery or reversely contact the positive and negative terminals.
- 6.9 Do not solder on the battery surface.
- 6.10 Do not test environment and safety under extrusion without any protection.
- 6.11 Do not use or store batteries under wet conditions without protection.
- 6.12 Batteries are not allowed to be used excessively in the equipment without setting the cut-off voltage. After reaching the cut-off voltage, it should be removed from the equipment immediately to stop working.
- 6.13 Stop using if the battery is found to have heat, odor, discoloration, deformation, or other abnormalities during using or storage.
- 6.14 Batteries used should be handled in accordance with local environmental regulations and buried deep underground or into brine.
- 6.15 If the liquid is splashed on the skin, eyes and clothes, rinse immediately with plenty of water, and then seek medical care immediately.

## **7. Storage**

- 7.1 Batteries should be used and stored away from static electricity
- 7.2 Batteries shall be stored not exceeding 30 DEG C and relative humidity of 45% - 75%.
- 7.3 Keep the battery away from the heat source, away from corrosive gas, avoid direct sunlight, and make sure the storage area is clean, cool, dry and ventilated.
- 7.4 The battery packing carton height shall not exceed 1.5 meters, and the wooden box shall not

exceed 3 meters.

7.5 Batteries should keep the original storage state when not using, after removing the packaging, the battery should not be piled up irregularly.

## **8. Transportation**

8.1 Battery meets the tests and criteria requirements of UN Manual, Part III, subsection 38.3.

8.2 Batteries should be protected against sunlight, fire, rain, immersion, and corrosive substances in transportation.

8.3 Handling and loading should be with care.

8.4 For long transportation, such as shipping, should be kept away from the engine. And in summer should not be prolonged in an airless environment.

## **9. Important tips**

9.1 The batteries are warranted to conform to the description contained in this specification for a period of twelve [12] months from the ex-factory date without use (after 6 months storage, FANSO recommend to active the battery, more details please consult FANSO), any claim by customer (apparatus manufacturer or distributor) must be pointed out within such period. During that warranty period, if the batteries are proved to become defective under proper stored and handled, FANSO will replace the batteries for free.

9.2 In practical applications, customer should be responsible for the compatibility and reliability of the battery and the device.

9.3 In any of the following circumstances, FANSO will not take any responsibility: the client' s fails of appropriate treatment, operation, installation, testing, maintenance and inspection of the battery, or do not follow the instructions provided in the specification, notes, terms, and other FANSO instructions.

9.4 This specification is accepted after 6 months from the date of issues if not be refunded.

## 10. Statement

If you have any questions on the product specifications, please contact with Wuhan Fanso Technology Co. ltd. Fanso reserves the right to amend the product specification.

## 11. Battery dimension (unit of size: mm)

Please check the specific finished product drawing



## **Disclaimer**

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.


It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

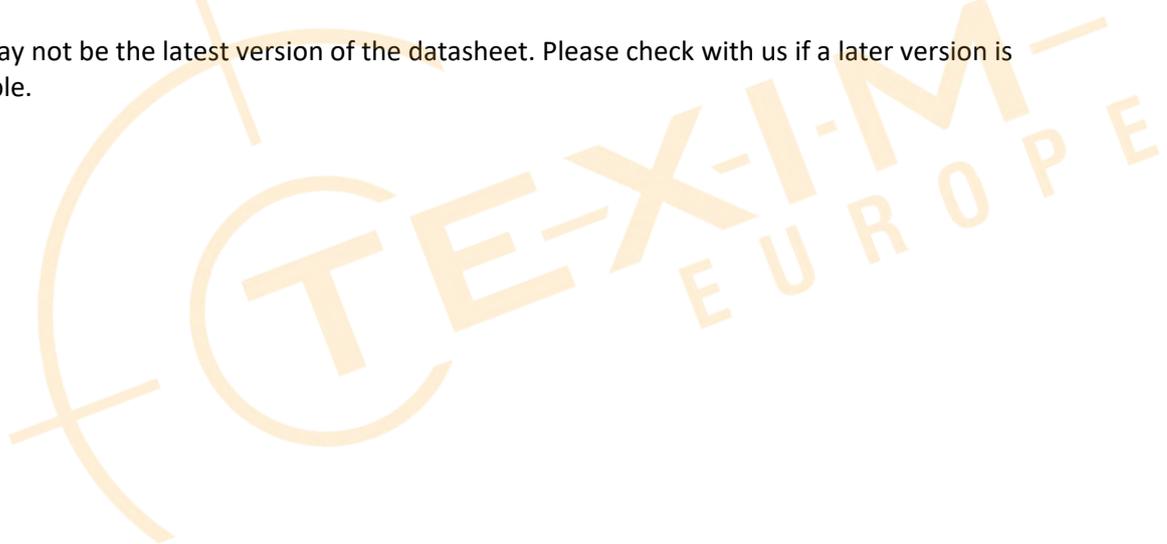



## Headquarters & Warehouse

Elektrostraat 17  
 NL-7483 PG Haaksbergen  
 The Netherlands

T: +31 (0)53 573 33 33  
 E: info@texim-europe.com  
 Homepage: www.texim-europe.com



### The Netherlands

Elektrostraat 17  
 NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33  
 E: nl@texim-europe.com



### Belgium

Zuiderlaan 14, box 10  
 B-1731 Zellik

T: +32 (0)2 462 01 00  
 E: belgium@texim-europe.com



### UK & Ireland

St Mary's House, Church Lane  
 Carlton Le Moorland  
 Lincoln LN5 9HS

T: +44 (0)1522 789 555  
 E: uk@texim-europe.com



### Germany

Bahnhofstrasse 92  
 D-25451 Quickborn

T: +49 (0)4106 627 07-0  
 E: germany@texim-europe.com



### Germany

Martin-Kollar-Strasse 9  
 D-81829 München

T: +49 (0)89 436 086-0  
 E: muenchen@texim-europe.com



### Austria

Warwitzstrasse 9  
 A-5020 Salzburg

T: +43 (0)662 216 026  
 E: austria@texim-europe.com



### Nordic

Stockholmsgade 45  
 2100 Copenhagen

T: +45 88 20 26 30  
 E: nordic@texim-europe.com



### Italy

Martin-Kollar-Strasse 9  
 D-81829 München

T: +49 (0)89 436 086-0  
 E: italy@texim-europe.com