

COMFORT SERENITY

Optimising comfort and ensuring the health of occupants
Reduce your deployment, integration and operational costs



Distributed by:



DEPLOY MORE SIMPLY AND QUICKLY

- Worldwide cellular compatibility (NB-IoT, LTE-M).
- Multi-platform integration facilitated by LWM2M and MQTT standards.
- Automated provisioning on the IoT platform through bootstrapping (LwM2M).
- Mobile application for on-site application configuration in NFC.

MEASURE AND ALERT ACCORDING TO YOUR NEEDS

- Monitor temperature, humidity, CO2 and TVOC concentrations, in a configurable measurement interval from 1 min to 7 days.
- Trigger an alarm in real time thanks to configurable high and/or low thresholds.
- Choose its transmission mode(s): periodic, event-based, with history, black out.

OPERATE YOUR FLEET OVER THE LONG TERM WITH THE LWM2M

- Standardized and remote device management operations, individually or in batches: commands, configuration read/write, FOTA.



**MADE IN
FRANCE**



- **Network:** excellent indoor coverage
- **Quick and easy application configuration,** with a smartphone or remotely
- **Intelligent air quality index**
- **Automatic calibration process** for accurate measurement

- **Multicolored LEDs:** real time knowledge of the Co2 concentration
- **Battery-operated product**
- **Historization and blackout:** optimized autonomy
- **Compact design,** easy to install
- **Designed and assembled in France**



Reduce
energy
consumption



Guarantee
occupant
satisfaction



Meet
to regulatory
obligations



Preserve
the building
against damage

TECHNICAL SPECIFICATIONS



NB-IOT ARF8394AB

Mechanical specifications

Weight	146 g (battery included)
Dimensions	111 x 61 x 40 mm
Enclosure	IP20, Bayblend® FR3010 (PC/ABS) plastic, white
Mounting	Wall or laid flat

Operating conditions

Range of use recommended	5°C / +50°C
Operating temperature	-10°C / +70°C
Humidity	0 to 85% HR (non-condensing)

Device Power Supply

Battery	Dual Battery Pack FANSO Li-SOCl2 ER18505H-2 or external power supply via USB-C port (not included)
Expected Battery Life	The product is powered by a replaceable battery pack and has been designed to work for up to 10 years without maintenance (device configuration : 1 sampling every 60 mins, 1 transmission every 60 mins, LEDs enabled).

Update

Applicative configuration	Setup via NFC using the Adeunis NFC IoT Configurator mobile application on Android or remotely
Firmware	Application firmware and remote modem firmware upgrade (FOTA)

Connectivity

SIM card	Nano SIM 4FF Class C (1.8V)
Cellular standard	3GPP LTE Version 13
LPWAN networks	NB-IoT, LTE-Cat-M1
Protocols	LWM2M 1.1, MQTT (optional)

Features	RF NB-IoT	LTE-Cat-M1
Frequency bands	B1, B2, B3, B4, B5, B12, B13, B17, B19, B20, B25, B26, B28, B66	B1, B2, B3, B4, B5, B12, B13, B14, B18, B19, B20, B25, B26, B28, B66
RF transmitting power	+23 dBm	+23 dBm
Sensibility	> -108 dBm -113 dBm typ	> -103 dBm -107 dBm typ

Regulations and certifications

Standard	Directive 2014/53/UE (RED)
----------	----------------------------

SENSORS	Technology	Measuring range	Accuracy
Environmental parameters			
Temperature	CMOSens®	0°C / +65°C	± 0.2°C typ. ± 1°C max.
Humidity	CMOSens®	10% to 90% HR	± 2% HR typ. ± 4.5% HR max
Air quality			
CO2	NDIR	400 à 5 000 ppm ; extended range up to 10 000 ppm	± 30 ppm +3% of the measurement on the beach 400 à 5000 ppm
COVT	NDIR	Scale of the COVT index from 1 to 500 points	< ± 15 index points or < ± 15% of the measured value



Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.


It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

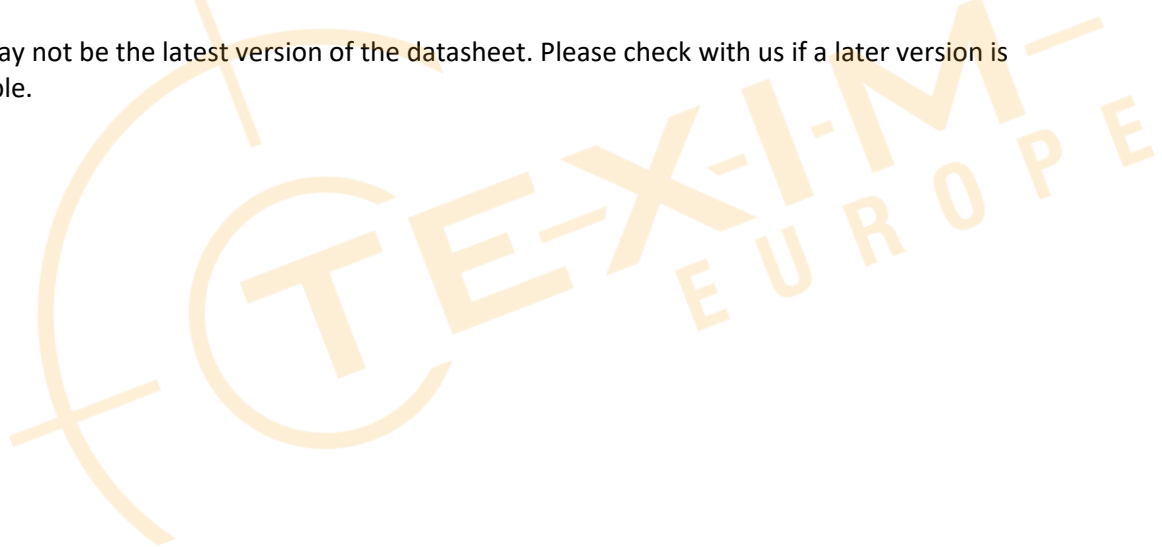



Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik

T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS


T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany - North

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany - South

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
E: austria@texim-europe.com



Nordic

Søndre Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com