

# COMFORT

## Optimising comfort and ensuring the health of occupants Reduce your deployment, integration and operational costs



Distributed by:



### DEPLOY MORE SIMPLY AND QUICKLY

- Worldwide cellular compatibility (NB-IoT, LTE-M).
- Multi-platform integration facilitated by LWM2M and MQTT standards.
- Automated provisioning on the IoT platform through bootstrapping (LwM2M).
- Mobile application for on-site application configuration in NFC.

### MEASURE AND ALERT ACCORDING TO YOUR NEEDS

- Monitor temperature and humidity in a configurable measurement interval from 1 min to 7 days.
- Trigger an alarm in real time thanks to configurable high and/or low thresholds.
- Choose its transmission mode(s): periodic, event-based, with history, black out.

### OPERATE YOUR FLEET OVER THE LONG TERM WITH THE LWM2M

- Standardized and remote device management operations, individually or in batches: commands, configuration read/write, FOTA.


**MADE IN FRANCE**


- **Network:** excellent indoor coverage
- **Quick and easy application configuration,** with a smartphone or remotely
- **Battery-operated product**
- **Historization and blackout:** optimized autonomy
- **Compact design,** easy to install
- **Designed and assembled in France**



Reduce  
energy  
consumption



Guarantee  
occupant  
satisfaction



Meet  
to regulatory  
obligations



Preserve  
the building  
against damage

# TECHNICAL SPECIFICATIONS



## NB-IOT ARF8394AA

### Mechanical specifications

Weight	140 g (battery included)
Dimensions	111 x 61 x 40 mm
Enclosure	IP20, Bayblend® FR3010 (PC/ABS) plastic, white
Mounting	Wall or laid flat

### Operating conditions

Range of use recommended	5°C / +50°C
Operating temperature	-10°C / +70°C
Humidity	0 to 85% HR (non-condensing)

### Device Power Supply

Battery	Dual Battery Pack FANSO Li-SOCl2 ER18505H-2 or external power supply via USB-C port (not included)
Expected Battery Life	The product is powered by a replaceable battery pack and has been designed to work for up to 15 years without maintenance (device configuration : 1 sampling every 60 mins, 1 transmission every 60 mins).

### Update

Applicative configuration	Setup via NFC using the Adeunis NFC IoT Configurator mobile application on Android or remotely
Firmware	Application firmware and remote modem firmware upgrade (FOTA)

### Connectivity

SIM card	Nano SIM 4FF   Class C (1.8V)
Cellular standard	3GPP LTE Version 13
LPWAN networks	NB-IoT, LTE-Cat-M1
Protocols	LWM2M 1.1, MQTT (optional)

Features	RF NB-IoT	LTE-Cat-M1
Frequency bands	B1, B2, B3, B4, B5, B12, B13, B17, B19, B20, B25, B26, B28, B66	B1, B2, B3, B4, B5, B12, B13, B14, B18, B19, B20, B25, B26, B28, B66
RF transmitting power	+23 dBm	+23 dBm
Sensibility	> -108 dBm -113 dBm typ	> -103 dBm -107 dBm typ

### Regulations and certifications

Standard	Directive 2014/53/UE (RED)
----------	----------------------------

SENSORS	Technology	Measuring range	Accuracy
Environmental parameters			
Temperature	CMOSens®	0°C / +65°C	± 0.2°C typ. ± 1°C max.
Humidity	CMOSens®	10% to 90% HR	± 2% HR typ. ± 4.5% HR max



## **Disclaimer**

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.


It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

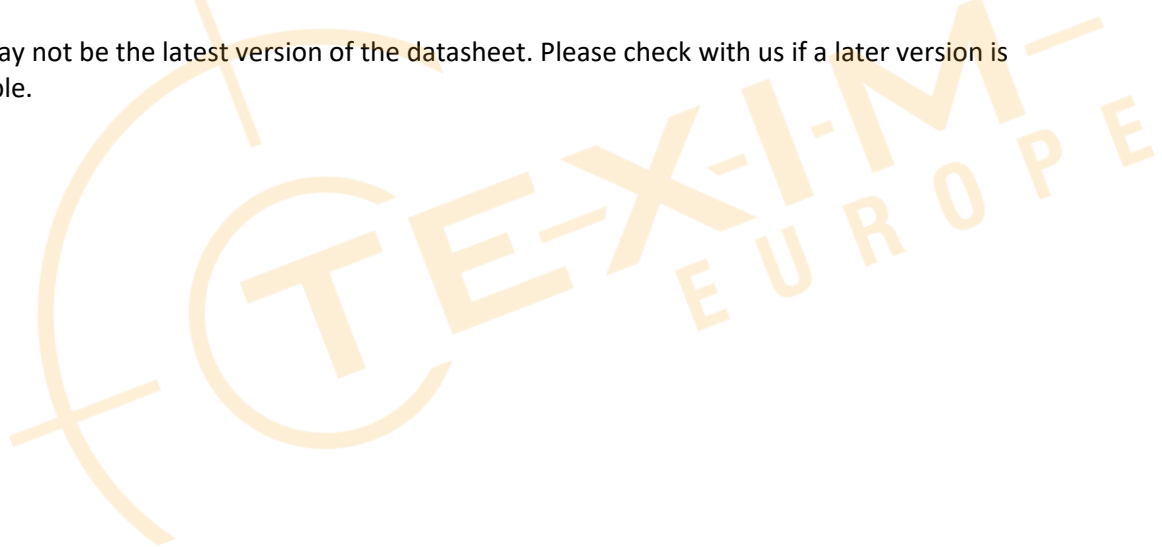



## Headquarters & Warehouse

Elektrostraat 17  
NL-7483 PG Haaksbergen  
The Netherlands

T: +31 (0)53 573 33 33  
E: info@texim-europe.com  
Homepage: www.texim-europe.com



### The Netherlands

Elektrostraat 17  
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33  
E: nl@texim-europe.com



### Belgium

Zuiderlaan 14, box 10  
B-1731 Zellik

T: +32 (0)2 462 01 00  
E: belgium@texim-europe.com



### UK & Ireland

St Mary's House, Church Lane  
Carlton Le Moorland  
Lincoln LN5 9HS


T: +44 (0)1522 789 555  
E: uk@texim-europe.com



### Germany - North

Bahnhofstrasse 92  
D-25451 Quickborn

T: +49 (0)4106 627 07-0  
E: germany@texim-europe.com



### Germany - South

Martin-Kollar-Strasse 9  
D-81829 München

T: +49 (0)89 436 086-0  
E: muenchen@texim-europe.com



### Austria

Warwitzstrasse 9  
A-5020 Salzburg

T: +43 (0)662 216 026  
E: austria@texim-europe.com



### Nordic

Søndre Jagtvej 12  
DK-2970 Hørsholm

T: +45 88 20 26 30  
E: nordic@texim-europe.com



### Italy

Martin-Kollar-Strasse 9  
D-81829 München

T: +49 (0)89 436 086-0  
E: italy@texim-europe.com