

Distributed by:



OFT-10WR2

10.1" Open Frame Tablet with Rockchip RK3568



Product Features

- 10.1" 800 x 1280 Open Frame Table with PCAP touch
- 2GB DDR4 / 32GB eMMC
- Support Android 11, Debian 11
- Rockchip RK3568 Arm Quad Cortex-A55, up to 2.0GHz
- Fanless operation from -20°C ~ 60°C (-4°F ~ 140°F)

Specification

System Information	
Processor	Rockchip RK3568 Arm Quad Cortex-A55, up to 2.0GHz
System Memory	2GB DDR4 on board
Storage	
Storage	32GB eMMC
Power Requirement	
DC Input	DC 12V~24V
Software Support	
Software	Android 11 / Debian 11
Certification	
Certification Information	CE, FCC Class A

External I/O connector

External IO connector	1 x RJ45 1 x DC Jack 1 x Headphone Jack 1 x HDMI 1.4 Out 1 x Reset 2 x USB 3.0 Type A
-----------------------	--

Internal IO connector

Internal IO connector	1 x A-MIC 1 x DC Input 1 x 16-bit GPIO 1 x I2C Sensor Interface 1 x M.2 3042 B-Key 1 x Mic-in 1 x Micro SD slot 1 x MIPI DSI 2 x RS232 1 x RS485 1 x RTC battery 1 x Speaker 1 x Touch Button 1 x USB CAM_DMIC Interface 1 x USB Touch interface
-----------------------	--

Panel

Touch Type	PCAP
Touch Controller	ILI_2511
LCD Size	10.1"
Resolution	800 x 1280
Touch Screen	ST-101C34B_V02 (USB interface)

Wireless Communication

Bluetooth	Optional BT 5.0
WLAN	Optional Wi-Fi 802.11ac/a/b/g/n

Mechanical & Environmental

Dimension (W x L x D)	254 x 178 x 32.8 mm
Weight	0.7 kg
Storage Temp.	-20°C ~ 60°C (-4°F ~ 140°F)
Operating Humidity	40°C @ 95% Relative Humidity, Non-condensing
Operating Temp.	0°C ~ 40°C (32°F ~ 104°F)
Fanless	Yes
Color	Metallic



Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.


It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

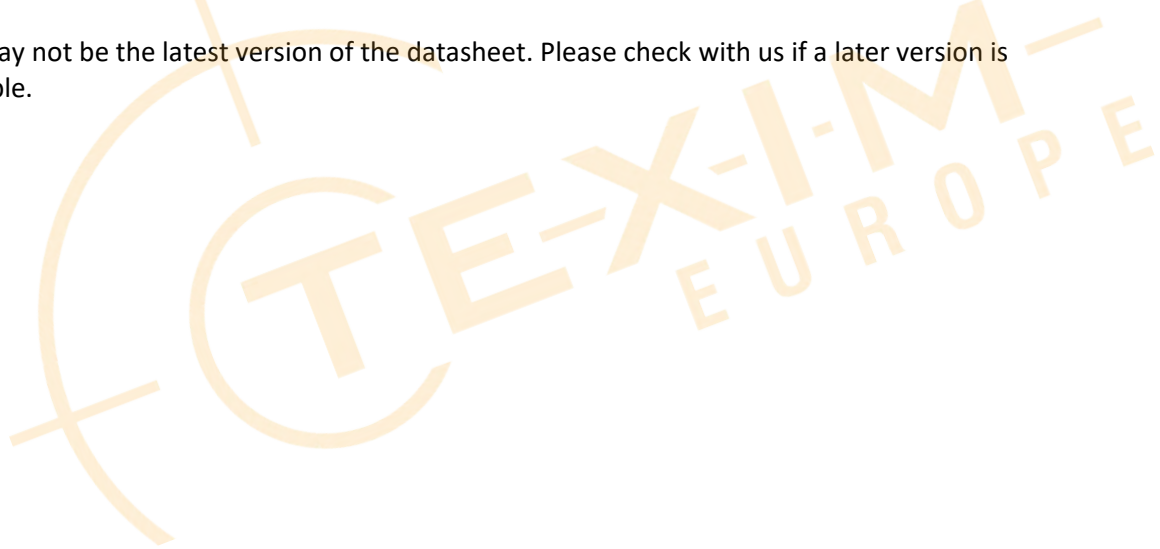



Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik

T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
E: austria@texim-europe.com



Nordic

Stockholmsgade 45
2100 Copenhagen

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com