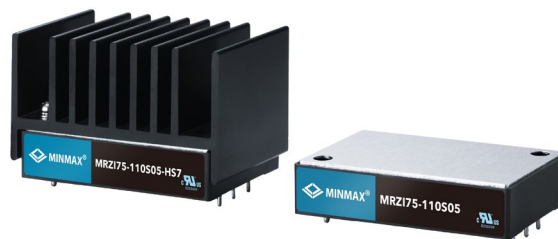


FEATURES

- ▶ Industrial Standard Quarter Brick Package
- ▶ Ultra-wide Input Range 36-160VDC
- ▶ Excellent Efficiency up to 91%
- ▶ I/O Isolation 2000VAC with Reinforced Insulation
- ▶ Operating Baseplate Temp. Range -40°C to +105°C
- ▶ Temperature Cycle Test (TCT) more than 1000 Cycles Passed
- ▶ No Min. Load Requirement
- ▶ Under-voltage, Overload/Voltage/Temp. and Short Circuit Protection
- ▶ Remote On/Off Control, Output Voltage Trim, Output Sense
- ▶ Vibration and Shock/Bump Test EN 61373 Approved
- ▶ Cooling, Dry & Damp Heat Test IEC/EN 60068-2-1, 2, 30 Approved
- ▶ Railway EMC Standard EN 50121-3-2 Approved
- ▶ Railway Certified EN 50155 (IEC60571) Approved
- ▶ Fire Protection Test EN 45545-2 Approved
- ▶ UL/cUL/IEC/EN 62368-1 Safety Approval & CE Marking (Pending)

NEW**PRODUCT OVERVIEW**

The MINMAX MRZI75 series is a new generation of high-performance 75W isolated DC-DC converters in a quarter-brick package, specifically designed for railway applications. It features a wide input range of 36-160 VDC and offers stable output voltage options of 5, 12, 15, 24, and 54 VDC (suitable for PoE applications), providing a range of choices for various railway needs.

With its advanced circuit topology, the MRZI75 series delivers an impressive efficiency of up to 91%, enabling baseplate temperatures to reach up to 105°C. The series also provides high I/O isolation of up to 2000VAC with reinforced insulation, designed to endure harsh environmental conditions.

Key features include protection against under-voltage, overload, over-voltage, over-temperature, and short circuits. It also supports remote On/Off control (with both positive and negative logic), output voltage trimming, and output sensing for precise power regulation. Notably, the MRZI75 series has passed the Temperature Cycle Test (TCT) with over 1000 cycles, ensuring enhanced reliability in extreme operating conditions.

The MRZI75 series is certified to the railway standard EN 50155 and the EMC standard EN 50121-3-2, meeting stringent safety and environmental requirements for railway use. Additionally, it complies with the EN 45545-2 fire protection standard, ensuring safety during railway and railroad vehicle operations.

This series is ideal for a variety of railway applications, such as traction control systems, onboard lighting, communication systems, surveillance equipment, and HVAC systems, providing reliable power conversion in demanding environments.

Model Selection Guide

Model Number	Input Voltage (Range) VDC	Output Voltage VDC	Output Current Max. A	Input Current		Over Voltage Protection VDC	Max. capacitive Load μF	Efficiency (typ.)
				@Max. Load mA(typ.)	@No Load mA(typ.)			@Max. Load %
MRZI75-110S05	110 (36 ~ 160)	5	15	766	43	6.2	30000	89
MRZI75-110S12		12	6.25	749	43	15	5200	91
MRZI75-110S15		15	5	749	43	18	3300	91
MRZI75-110S24		24	3.125	758	43	30	1200	90
MRZI75-110S54		54	1.39	767	43	66	330	89

Input Specifications

Input Specifications				
Parameter	Min.	Typ.	Max.	Unit
Input Surge Voltage (1000ms. max)	-0.7	---	200	VDC
Start-up Threshold Voltage	---	---	36	
Under Voltage Shutdown	---	32	---	
Input Filter	Internal Capacitor			

**MRZI75 SERIES**

DC-DC CONVERTER 75W, Reinforced Insulation, Railway Certified

Output Specifications							
Parameter	Conditions			Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy				---	---	±1.0	%
Line Regulation	Vin=Min. to Max. @ Full Load			---	---	±0.2	%
Load Regulation	Min. Load to Full Load			---	---	±0.3	%
Min.Load	No minimum Load Requirement						
Ripple & Noise	0-20 MHz Bandwidth	5V, 12V, 15V Output	Measured with a 22uF/25V POS-CAP	---	---	100	mV _{P-P}
		24V Output	Measured with a 33uF/35V POLYMER	---	---	150	mV _{P-P}
		54V Output	Measured with a 1uF/100V MLCC	---	---	300	mV _{P-P}
Start Up Time (Power On)				---	---	70	ms
Transient Recovery Time	25% Load Step Change ⁽²⁾			---	250	---	µs
Transient Response Deviation				---	±3	±5	%
Temperature Coefficient				---	---	±0.02	%/°C
Trim Up / Down Range ⁽⁸⁾	% of Nominal Output Voltage	Other Models	---	---	±10	%	
		54V Output	---	---	+5 / -15	%	
Over Load Protection	Current Limitation at 150% typ. of Iout max., Hiccup						
Short Circuit Protection	Continuous, Automatic Recovery (Hiccup Mode 0.3Hz typ.)						

General Specifications						
Parameter		Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage		Reinforced Insulation, Rated For 60 Seconds	2000	---	---	VAC
Isolation Voltage	Input to case	Rated For 60 Seconds	1680	---	---	VAC
	Output to case		500	---	---	VAC
I/O Isolation Resistance		500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance		100kHz, 1V	---	---	2200	pF
Switching Frequency		5V Output	---	185	---	kHz
		Other Models	---	214	---	kHz
MTBF(calculated)		MIL-HDBK-217F@25°C Full Load, Ground Benign	642,314	---	---	Hours
Safety Standards		EN 50155, IEC 60571				
		UL/cUL 62368-1 recognition(UL certificate), IEC/EN 62368-1				

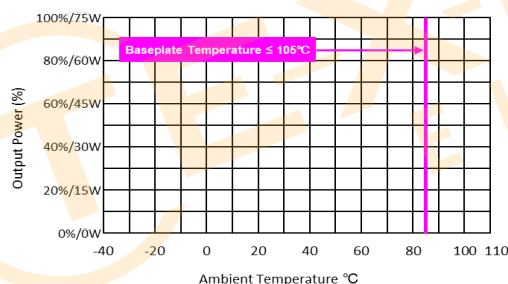
Remote On/Off Control							
Parameter			Conditions	Min.	Typ.	Max.	Unit
Positive logic (Standard)		Converter On	3.5V ~ 12V or Open Circuit				
		Converter Off	0V ~ 1.2V or Short Circuit				
Negative logic (Option)		Converter On	0V ~ 1.2V or Short Circuit				
		Converter Off	3.5V ~ 12V or Open Circuit				
Positive logic	Control Input Current	Converter On	Vctrl = 5.0V	---	0.5	---	mA
		Converter Off	Vctrl = 0V	---	-0.5	---	mA
Negative logic	Control Input Current	Converter On	Vctrl = 0V	---	-0.5	---	mA
		Converter Off	Vctrl = 5.0V	---	0.5	---	mA
Control Common			Referenced to Negative Input				
Standby Input Current			Nominal Vin	---	3	---	mA

EMC Specifications

EMC Specifications				
Parameter	Standards & Level			Performance
General	Compliance with EN 50121-3-2 Railway Applications			
EMI ₍₅₎	Conduction	EN 55032/11	With external components	Class A
	Radiation			
EMS ₍₅₎	EN 55024, EN 55035			
	ESD	Direct discharge	Indirect discharge HCP & VCP	A
		EN 61000-4-2 air ± 8kV, Contact ± 6kV		
	Radiated immunity	EN 61000-4-3 10V/m		A
	Fast transient	EN 61000-4-4 ±2kV		A
	Surge	EN 61000-4-5 ±2kV		A
	Conducted immunity	EN 61000-4-6 10Vrms		A
	PFMF	EN 61000-4-8 30A/m for Continuous		A

Environmental Specifications

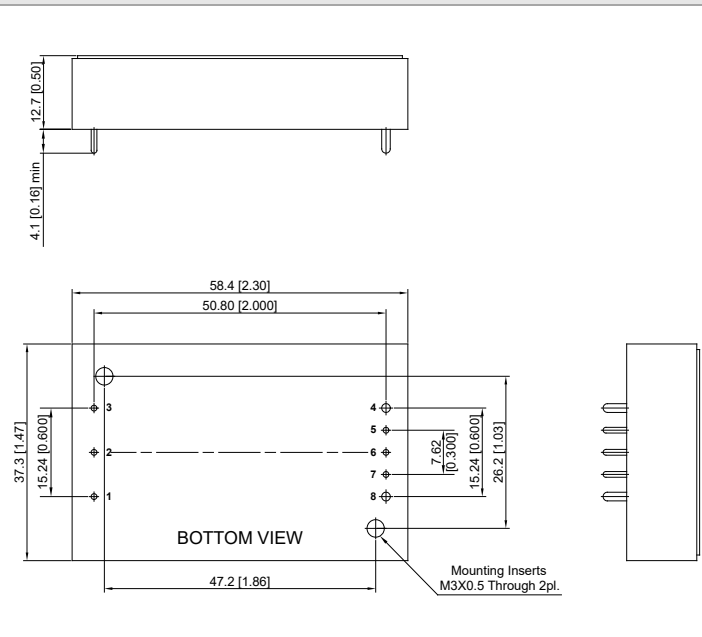
Parameter	Conditions	Min.	Typ.	Max.	Unit
Baseplate Temperature Range		-40	---	+105	°C
Over Temperature Protection (Baseplate)		---	+110	---	°C
Storage Temperature Range		-50	---	+125	°C
Cooling Test	Compliance to IEC/EN60068-2-1				
Dry Heat	Compliance to IEC/EN60068-2-2				
Damp Heat	Compliance to IEC/EN60068-2-30				
Vibration and Shock/Bump	Compliance to IEC/EN 61373				
Operating Humidity (non condensing)		5		95	% rel. H
Lead Temperature (1.5mm from case for 10Sec.)		---		260	°C

Power Derating Curve

* The power module can deliver full rated power as long as users keep operating baseplate temperature below 105°C within defined ambient temperature range.

Notes

- Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- Other input and output voltage may be available, please contact MINMAX.
- It is necessary to parallel a capacitor across the input pins under normal operation. Minimum Capacitance: 150μF/ 250V KXJ.
- The external components might be required to meet EMI/EMS standard for some of test items. Please contact MINMAX for the solution in detail.
- The hot-swap operation is extremely prohibited.
- Over Current Protection (OCP) is built in and works over 130% of the rated current or higher. However, use in an over current situation over 4 seconds must be avoided whenever possible.
- Do not exceed maximum power specification when adjusting output voltage. Please see the External Output Trimming table at page 7.
- Specifications are subject to change without notice.
- The repeated high voltage isolation testing of the converter can degrade isolation capability, to a lesser or greater degree depending on materials, construction, environment and reflow solder process. Any material is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage. Furthermore, the high voltage isolation capability after reflow solder process should be evaluated as it is applied on system.

Package Specifications**Mechanical Dimensions****Pin Connections**

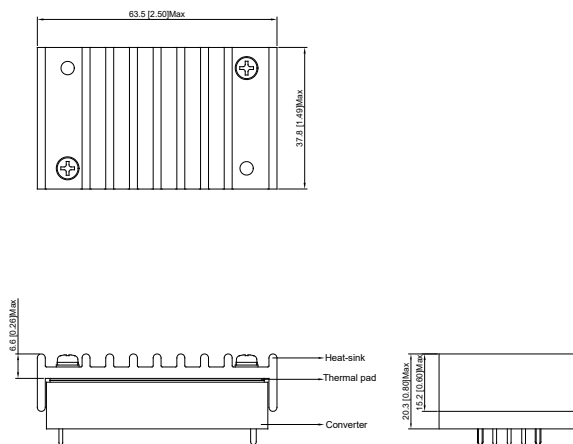
Pin	Function	Diameter mm (inches)
1	+Vin	Ø 1.0 [0.04]
2	Remote On/Off	Ø 1.0 [0.04]
3	-Vin	Ø 1.0 [0.04]
4	-Vout	Ø 1.5 [0.06]
5	* -Sense	Ø 1.0 [0.04]
6	Trim	Ø 1.0 [0.04]
7	* +Sense	Ø 1.0 [0.04]
8	+Vout	Ø 1.5 [0.06]

* If remote sense not used the +sense should be connected to +output and -sense should be connected to -output
Maximum output deviation is 10% inclusive of trim

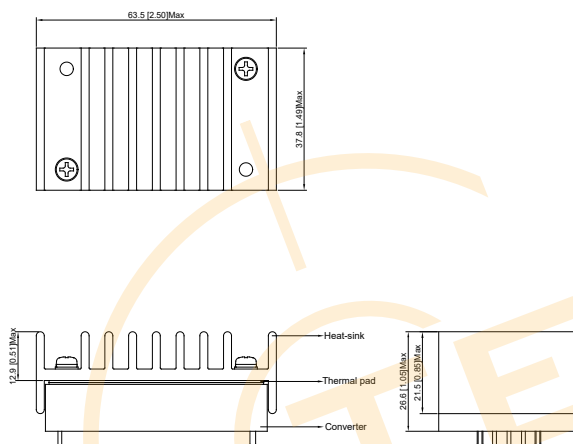
- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.01)
- ▶ Pin diameter tolerance: X.X±0.05 (X.XX±0.002)

Physical Characteristics

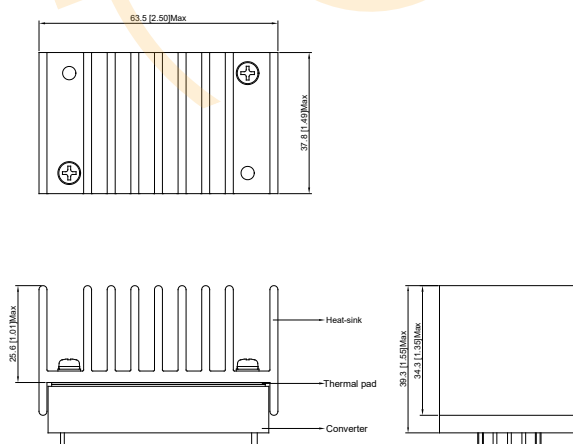
Case Size	: 58.4x37.3x12.7 mm (2.30x1.47x0.50 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Top Side Base Material	: Aluminum Plate
Pin Material	: Copper
Potting Material	: Silicone (UL94-V0)
Weight	: 70g

Heatsink (Option –HS5)**Physical Characteristics**

Heatsink Material	: Aluminum
Finish	: Black Anodized Coating
Weight	: 27g

Heatsink (Option –HS6)**Physical Characteristics**

Heatsink Material	: Aluminum
Finish	: Black Anodized Coating
Weight	: 38g

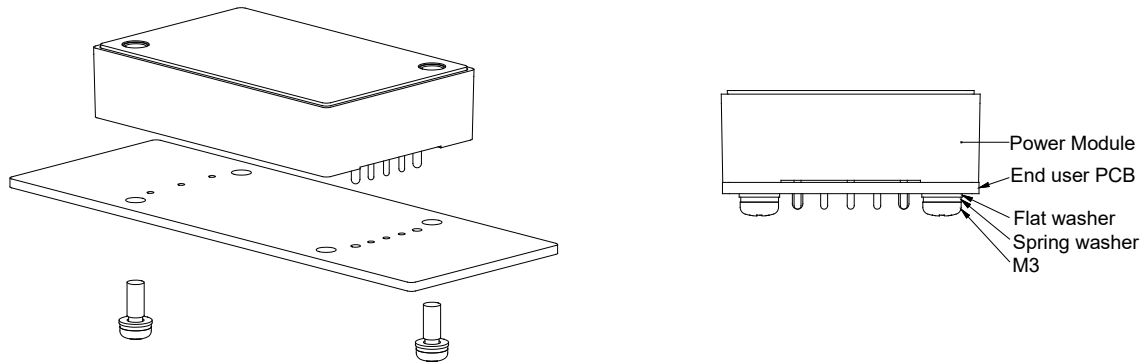
Heatsink (Option –HS7)**Physical Characteristics**

Heatsink Material	: Aluminum
Finish	: Black Anodized Coating
Weight	: 63g

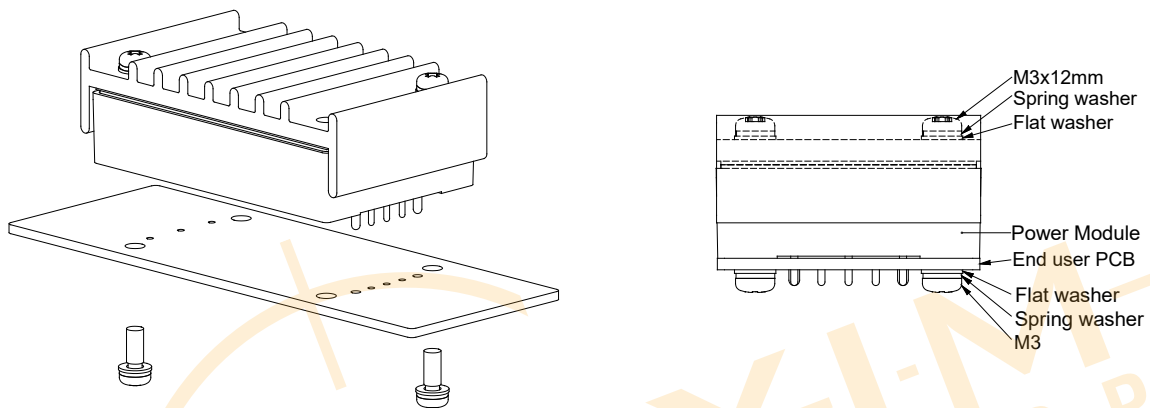
*For more power derating information, please refer to E.C Note.

PCB Installation of End Users

Standard Kit



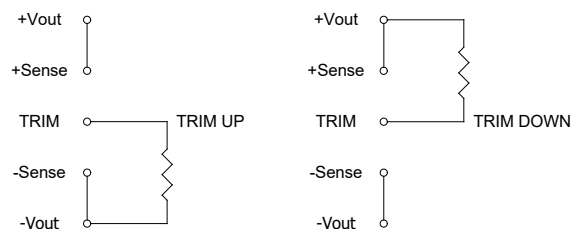
Heatsink Kit



1. Please evaluate mechanical stress (vibration, shock, bump) during field applications.
2. It has to equip with installation kit if excess the guaranteed specifications, please contacts MINMAX for detail information.
3. Applied torque per screw 5 kgf.cm min.

External Output Trimming

Output can be externally trimmed by using the method shown below

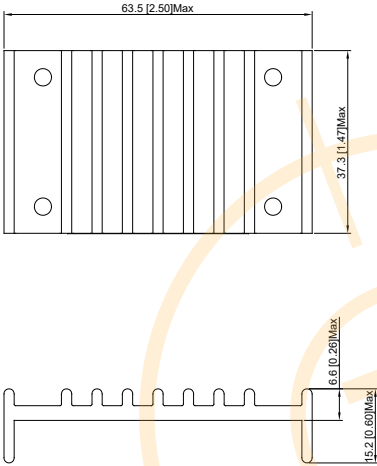
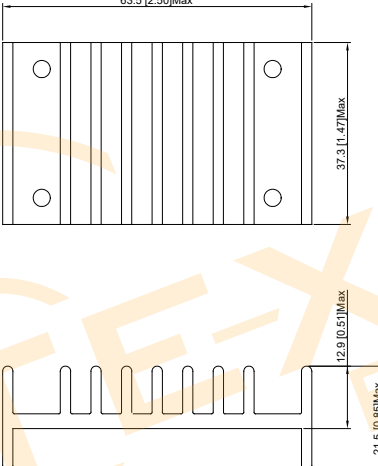
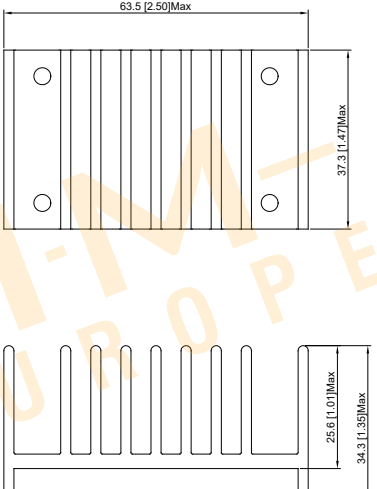


	MRZI75-110S05		MRZI75-110S12		MRZI75-110S15		MRZI75-110S24		MRZI75-110S54	
Trim Range (%)	Trim down (k Ω)	Trim up (k Ω)	Trim down (k Ω)	Trim up (k Ω)	Trim down (k Ω)	Trim up (k Ω)	Trim down (k Ω)	Trim up (k Ω)	Trim down (k Ω)	Trim up (k Ω)
1	138.88	106.87	413.55	351.00	530.73	422.77	599.27	486.53	1,882.57	560.73
2	62.41	47.76	184.55	157.50	238.61	189.89	268.09	217.71	877.94	230.36
3	36.92	28.06	108.22	93.00	141.24	112.26	157.69	218.11	543.06	120.24
4	24.18	18.21	70.05	60.75	92.56	73.44	102.49	83.31	375.62	65.18
5	16.53	12.30	47.15	41.40	63.35	50.15	69.37	56.43	275.15	32.15
6	11.44	8.36	31.88	28.50	43.87	34.63	47.3	38.5	208.18	---
7	7.79	5.55	20.98	19.29	29.96	23.54	31.52	25.7	160.34	---
8	5.06	3.44	12.80	12.37	19.53	15.22	19.7	16.1	124.46	---
9	2.94	1.79	6.44	7.00	11.41	8.75	10.5	8.64	96.55	---
10	1.24	0.48	1.35	2.70	4.92	3.58	3.14	2.66	74.23	---
11	---	---	---	---	---	---	---	---	55.96	---
12	---	---	---	---	---	---	---	---	40.74	---
13	---	---	---	---	---	---	---	---	27.86	---
14	---	---	---	---	---	---	---	---	16.82	---
15	---	---	---	---	---	---	---	---	7.25	---

Order Code Table For Converter and Converter With Heatsink

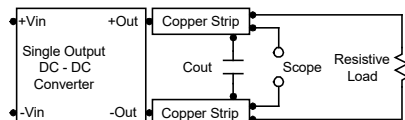
Standard (Positive logic)	With heatsink (Positive logic)		
	MRZI75 + HS-QB005	MRZI75 + HS-QB006	MRZI75 + HS-QB007
MRZI75-110S05	MRZI75-110S05-HS5	MRZI75-110S05-HS6	MRZI75-110S05-HS7
MRZI75-110S12	MRZI75-110S12-HS5	MRZI75-110S12-HS6	MRZI75-110S12-HS7
MRZI75-110S15	MRZI75-110S15-HS5	MRZI75-110S15-HS6	MRZI75-110S15-HS7
MRZI75-110S24	MRZI75-110S24-HS5	MRZI75-110S24-HS6	MRZI75-110S24-HS7
MRZI75-110S54	MRZI75-110S54-HS5	MRZI75-110S54-HS6	MRZI75-110S54-HS7
Negative logic	With heatsink (Negative logic)		
	MRZI75 + HS-QB005	MRZI75 + HS-QB006	MRZI75 + HS-QB007
MRZI75-110S05N	MRZI75-110S05N-HS5	MRZI75-110S05N-HS6	MRZI75-110S05N-HS7
MRZI75-110S12N	MRZI75-110S12N-HS5	MRZI75-110S12N-HS6	MRZI75-110S12N-HS7
MRZI75-110S15N	MRZI75-110S15N-HS5	MRZI75-110S15N-HS6	MRZI75-110S15N-HS7
MRZI75-110S24N	MRZI75-110S24N-HS5	MRZI75-110S24N-HS6	MRZI75-110S24N-HS7
MRZI75-110S54N	MRZI75-110S54N-HS5	MRZI75-110S54N-HS6	MRZI75-110S54N-HS7

Order Code Table For Heatsink kit (including: Heatsink x1, Screw (M3/14mm) x 2, Thermal Pad x1)

HS-QB005	HS-QB006	HS-QB007
		

Test Setup**Peak-to-Peak Output Noise Measurement Test**

Use a 22 μ F polymer capacitor for 5V, 12V, 15V output models and a 33 μ F polymer capacitor for 24V output model and a 1 μ F ceramic capacitor for 54V output model. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

**Technical Notes****Remote On/Off**

Positive logic remote on/off turns the module on during a logic high voltage on the remote on/off pin, and off during a logic low. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal. The switch can be an open collector or equivalent. A logic low is 0V to 1.2V. A logic high is 3.5V to 12V. The maximum sink current at the on/off terminal (Pin 2) during a logic low is -500 μ A.

Negative logic remote on/off turns the module on during a logic low voltage on the remote on/off pin, and off during a logic high. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal. The switch can be an open collector or equivalent. A logic low is 0V to 1.2V. A logic high is 3.5V to 12V. The maximum source current at the on/off terminal (Pin 2) during a logic high is 500 μ A.

Overload Protection

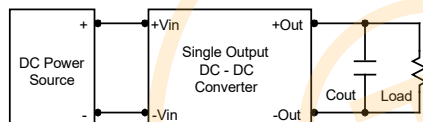
To provide hiccup mode protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure overload for an unlimited duration.

Overvoltage Protection

The output overvoltage clamp consists of control circuitry, which is independent of the primary regulation loop, that monitors the voltage on the output terminals. The control loop of the clamp has a higher voltage set point than the primary loop. This provides a redundant voltage control that reduces the risk of output overvoltage. The OVP level can be found in the output data.

Output Ripple Reduction


A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 4.7 μ F capacitors at the output.

**Maximum Capacitive Load**

The MRZI75 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the baseplate temperature must be kept below 105°C. The derating curves are determined from measurements obtained in a test setup.



Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.

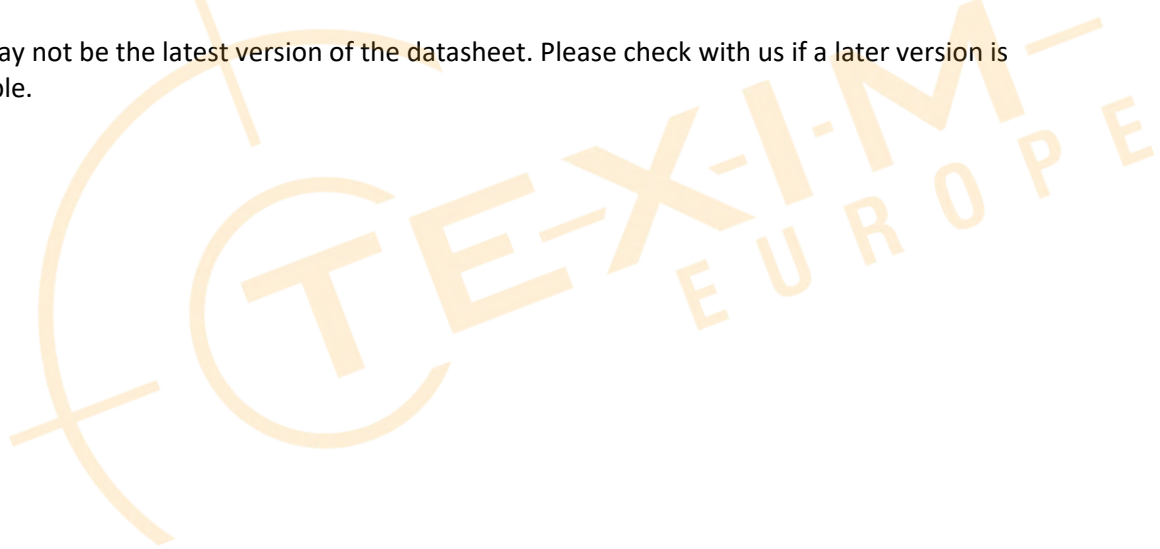
It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.





Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik

T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
E: austria@texim-europe.com



Nordic

Stockholmsgade 45
2100 Copenhagen

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com