

1 Description

The RedRock™ RR121 Series is a magnetic sensor with digital push-pull output ideal for use in medical, industrial, automotive, and consumer applications. Based on patented Tunneling Magnetoresistance (TMR) technology with seamless CMOS integration, the RR121 offers multiple configurations of several parameters to enable applications like proximity sensing, rotary sensing, and level detection.

The RR121 features available operate sensitivities from 9 G (0.9 mT) to 70 G (7 mT), and either omnipolar, unipolar, or bipolar magnetic field response. It has the world's lowest average current drain (200 nA) for an active magnetic sensor, as well as operating frequencies up to 10 kHz and high operating temperature ranges from -40°C up to 125°C.

Device Information

Part Series	Package	Body Size (mm)
RR121	SOT-23-3	2.9 x 1.6 x 1.2
	LGA-4	1.4 x 1.4 x 0.45


Device Packages



Distributed by:



Functional Block Diagram

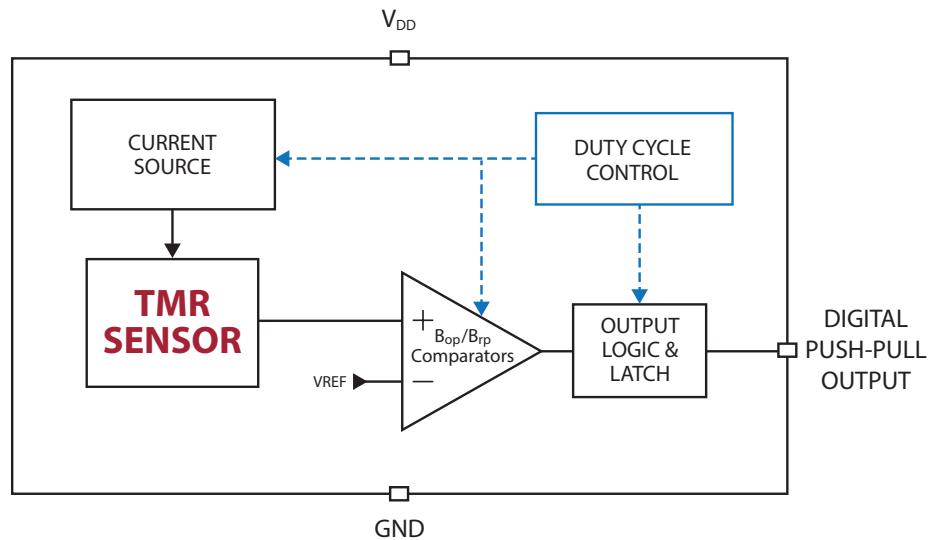

DISTRIBUTED BY TEXIM EUROPE

Table of Contents

1. Description.....	1
2. Features	1
3. Applications	1
4. Specifications for all RR121 Series Sensors	3
4.1 Absolute Environmental Ratings for all RR121 Series Sensors..	3
4.2 Absolute Electrical Ratings for all RR121 Series Sensors	3
4.3 Operating Electrical Characteristics for all RR121 Series Sensors	3
5. Operating Characteristics for RR121-1B13-311 and RR121-1B13-312	4
6. Graphs - Typical Electrical Characteristics for RR121-1B13-311 and RR121-1B13-312	4
6.1 Average Supply Current vs. Supply Voltage vs. Temperature .	4
6.2 Average Supply Current vs. Temperature vs. Supply Voltage .	4
6.3 Sampling Frequency vs. Supply Voltage vs. Temperature ..	5
7. Graphs - Typical Magnetic Characteristics for RR121-1B13-311 and RR121-1B13-312	5
7.1 B_{OPN} (Red) and B_{OPS} (Blue) vs. Supply Voltage at +25°C ..	5
7.2 B_{RPN} (Red) and B_{RPS} (Blue) vs. Supply Voltage at +25°C.....	5
7.3 B_{OPN} (Orange) and B_{OPS} (Green) vs. Operating Temperature at $V_{DD}=3.0\text{ V}$	6
7.4 B_{OPN} (Red) and B_{OPS} (Blue) vs. Supply Voltage at +25°C ..	6
8. Operate & Release Lobe Plots	6
8.1 RR121-1B13-311	6
8.2 RR121-1B13-312	6
9. Operating Characteristics for RR121-1A23-311	7
10. Operating Characteristics for RR121-1F23-311	7
11. Graphs - Typical Characteristics for RR121-1A23-311 and RR121-1F23-311	8
11.1 Average Supply Current vs. Supply Voltage vs. Temperature	8
11.2 Average Supply Current vs. Temperature vs. Supply Voltage	8
11.3 Sampling Frequency vs. Supply Voltage vs. Temperature ..	8
12. Graphs - Typical Magnetic Characteristics for RR121-1A23-311 ...	9
12.1 B_{OPN} (Red) and B_{OPS} (Blue) vs. Supply Voltage at +25°C ..	9
12.2 B_{RPN} (Red) and B_{RPS} (Blue) vs. Supply Voltage at +25°C ..	9
12.3 B_{OPN} (Orange) and B_{OPS} (Green) vs. Operating Temperature at $V_{DD}=3.0\text{ V}$	9
12.4 B_{OPN} (Red) and B_{OPS} (Blue) vs. Supply Voltage at +25°C ..	9
13. Operate & Release Lobe Plot	10
13.1 RR121-1A23-311	10
14. Operating Characteristics for RR121-1B53-311	10
15. Operating Characteristics for RR121-1A53-311	11
16. Graphs - Typical Characteristics for RR121-1B53-311 and RR121-1A53-311	11
16.1 Average Supply Current vs. Supply Voltage vs. Temperature	11
16.2 Average Supply Current vs. Temperature vs. Supply Voltage	11
16.3 Sampling Frequency vs. Supply Voltage vs. Temperature ..	12
17. Graphs - Typical Magnetic Characteristics for RR121-1B53-311 ..	12
17.1 B_{OPN} (Red) and B_{OPS} (Blue) vs. Supply Voltage at +25°C ..	12
17.2 B_{RPN} (Red) and B_{RPS} (Blue) vs. Supply Voltage at +25°C ..	12
17.3 B_{OPN} (Orange) and B_{OPS} (Green) vs. Operating Temperature at $V_{DD}=3.0\text{ V}$	13
17.4 B_{OPN} (Red) and B_{OPS} (Blue) vs. Supply Voltage at +25°C ..	13
18. Operate & Release Lobe Plots	13
18.1 RR121-1B53-311	13
19. Operating Characteristics for RR121-3C63-311	14
20. Graphs - Typical Characteristics for RR121-3C63-311	14
20.1 Average Supply Current vs. Supply Voltage vs. Temperature	14
20.2 Average Supply Current vs. Temperature vs. Supply Voltage	14
20.3 Sampling Frequency vs. Supply Voltage vs. Temperature ..	14
21. Operating Characteristics for RR121-1E73-311	15
22. Graphs - Typical Characteristics for RR121-1E73-311	15
22.1 Average Supply Current vs. Supply Voltage vs. Temperature	15
22.2 Average Supply Current vs. Temperature vs. Supply Voltage	15
22.3 Sampling Frequency vs. Supply Voltage vs. Temperature ..	16
23. Operating Characteristics for RR121-1B93-312	16
24. Graphs - Typical Characteristics for RR121-1B93-312	17
24.1 Sampling Frequency vs. Supply Voltage vs. Temperature ..	17
25. Graphs - Typical Magnetic Characteristics for RR121-1B93-311 ..	17
25.1 B_{OPN} (Red) and B_{OPS} (Blue) vs. Supply Voltage at +25°C ..	17
25.2 B_{RPN} (Red) and B_{RPS} (Blue) vs. Supply Voltage at +25°C ..	17
25.3 B_{OPN} (Orange) and B_{OPS} (Green) vs. Operating Temperature at $V_{DD}=3.0\text{ V}$	18
25.4 B_{OPN} (Red) and B_{OPS} (Blue) vs. Supply Voltage at +25°C ..	18
26. Application Information	18
26.1 RR121 Push-Pull Output Application Circuit (SOT-23) ..	18
26.2 RR121 Push-Pull Output Application Circuit (LGA-4) ..	18
27. Part Selection & Ordering Information	19
27.1 Part Selection Table	19
27.2 Device Nomenclature Ordering Information	19
28. Axis of Sensitivity	19
29. Dimensions	20
29.1 LGA-4 Package Dimensions	20
29.2 SOT-23-3 Package Dimensions	20
30. TMR Sensor Location	20
30.1 LGA Package	20
30.2 SOT Package	20
31. Magnetic Flux Response Diagrams	21
31.1 Omnipolar Magnetic Flux Response (Active Low Option)	21
31.2 Bipolar Magnetic Flux Response (Active Low Option)	21
32. Output Behavior vs. Magnetic Field Diagrams	21
32.1 Output Behavior vs. Magnetic Field - Omnipolar	21
32.2 Output Behavior vs. Magnetic Field - Bipolar	21
33. TMR Sensor & Switch Packaging	22
33.1 SOT-23-3 Tape & Reel Packaging	22
33.2 LGA-4 Tape & Reel Packaging	23
34. Suggested Pb-Free Reflow Profile	24
35. Suggested Solder Pad Layout	24
35.1 SOT-23-3 Solder Pad Layout	24
35.2 LGA-4 Solder Pad Layout	24

DISTRIBUTED BY TEXIM EUROPE

4 Specifications for all RR121 Series Sensors

4.1 Absolute Environmental Ratings for all RR121 Series Sensors¹

Parameters	Units	Min	Typ	Max
Operating Temperature (T_{OP})	°C	-40		+125
Storage Temperature (T_{STG})	°C	-65		+150
Junction Temperature (T_J)	°C	-40		+150
Soldering Temperature (3 cycles, 1 min.) (T_{SOL})	°C			+260
ESD Level Human Body Model per JESD22-A114	V			±4000

4.2 Absolute Electrical Ratings for all RR121 Series Sensors¹

Parameters	Units	Min	Typ	Max
Supply Voltage (V_{DD})	V	-0.3		+4.0
Push-pull Output (Active Low) (V_{OUT_PP})	V	-0.3		$V_{DD} + 0.3$
Open Drain Output Voltage (Active Low) (V_{OUT_OD})	V	-0.3		+5.5
Input and Output Current (V_{IN}/I_{OUT})	mA	-10		+10

4.3 Operating Electrical Characteristics for all RR121 Series Sensors²

Parameters	Units	Min	Typ	Max
Supply Voltage (V_{DD})	V	+2.7	+3.0	+3.6
Output Voltage (High) ³ (V_{OUTH})	V	90% V_{DD}		
Output Voltage (Low) ³ (V_{OUTL})	V			10% V_{DD}
Power-On Time (t_{ON}) ($V_{DD} > 2.7V$)	µs		500	
Under-Voltage Lockout Threshold Rising V_{DD} (V_{UVLO_RISE})	V		+2.20	+2.60
Under-Voltage Lockout Threshold Falling V_{DD} (V_{UVLO_FALL})	V	+1.90	+2.15	
Under-Voltage Lockout Hysteresis (V_{UV_HYST})	mV		+50	

Notes:

1. Exceeding Absolute Ratings may cause permanent damage to the device. Exposure at the maximum rated conditions for extended periods of time may also affect device reliability.
2. Unless otherwise specified, all characteristics are measured at 25°C.
3. See "Magnetic Field vs. Output Status" for more details.



ESD Note: This product uses semiconductors that can be damaged by electrostatic discharge (ESD). When handling, proper ESD precautions should be taken to avoid performance degradation or loss of functionality. Damage due to inappropriate handling is not covered under warranty.

DISTRIBUTED BY TEXIM EUROPE

5 Operating Characteristics for RR121-1B13-311 and RR121-1B13-312¹

Parameters	Units	Min	Typ	Max
Average Supply Current ($I_{DD\text{ (AVG)}}$) ²	nA		200	700
Switching Frequency (f_{SW})	Hz	1	2	4
Active Mode Time (t_{ACT})	μs		1.4	
Idle Mode Time (t_{IDLE})	ms		500	
Operate Point (B_{OPN})	G	27	30	38
Operate Point (B_{OPS})	G	-38	-30	-27
Release Point (B_{RPN})	G	18	20	27
Release Point (B_{RPS})	G	-27	-20	-18
Hysteresis (B_{HYST}) ³	G	5	10	

Notes:

1. Unless otherwise specified, $V_{DD} = 2.7\text{ V}$ to 3.6 V , $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$. Typical values are $V_{DD} = 3.0\text{ V}$ and $T_A = +25^\circ\text{C}$.


2. Conditions: $t = 10$ seconds

3. Conditions: $B_{HYST} = B_{OP} - B_{RP}$


6 Graphs - Typical Electrical Characteristics for RR121-1B13-311 and RR121-1B13-312

$V_{DD} = 3.0\text{ V}$ and $T_A = +25^\circ\text{C}$, $C_{DD} = 1.0\text{ }\mu\text{F}$ (unless otherwise specified)

**6.1 Average Supply Current vs.
Supply Voltage vs. Temperature**

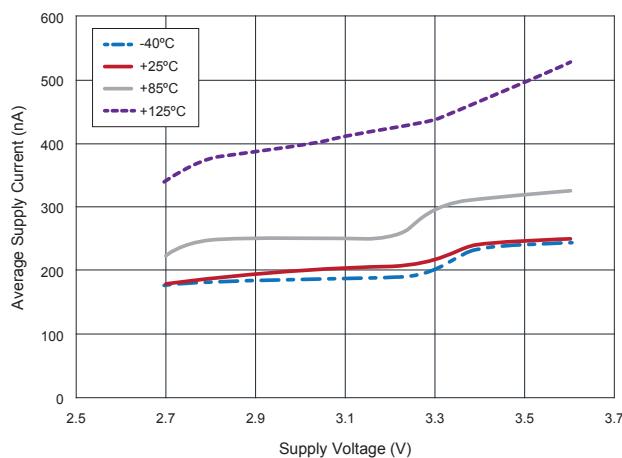

**6.2 Average Supply Current vs.
Temperature vs. Supply Voltage**

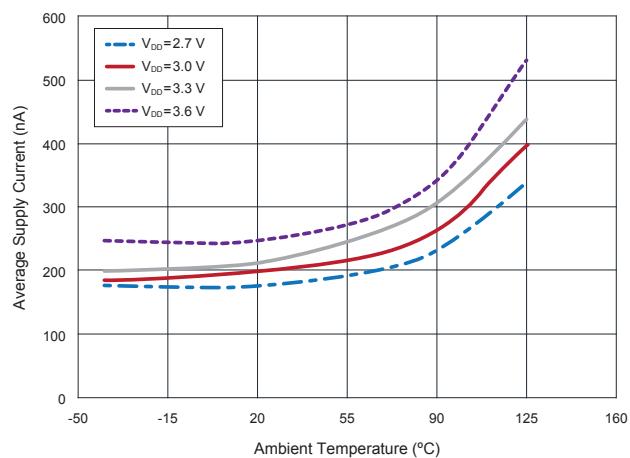


DISTRIBUTED BY TEXIM EUROPE

6 Graphs - Typical Electrical Characteristics for RR121-1B13-311 and RR121-1B13-312

$V_{DD} = 3.0 \text{ V}$ and $T_A = +25^\circ\text{C}$, $C_{DD} = 1.0 \mu\text{F}$ (unless otherwise specified)


6.3 Sampling Frequency vs. Supply Voltage vs. Temperature

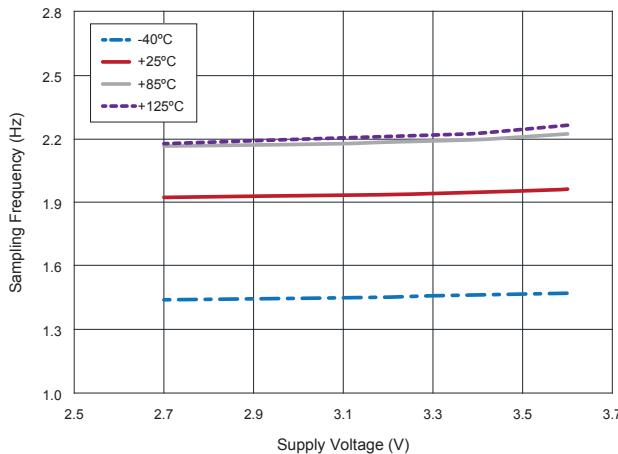


7 Graphs - Typical Magnetic Characteristics for RR121-1B13-311 and RR121-1B13-312

$V_{DD} = 3.0 \text{ V}$ and $T_A = +25^\circ\text{C}$, $C_{DD} = 1.0 \mu\text{F}$ (unless otherwise specified)

7.1 B_{OPN} (Blue) and B_{OPS} (Red) vs. Supply Voltage at $+25^\circ\text{C}$

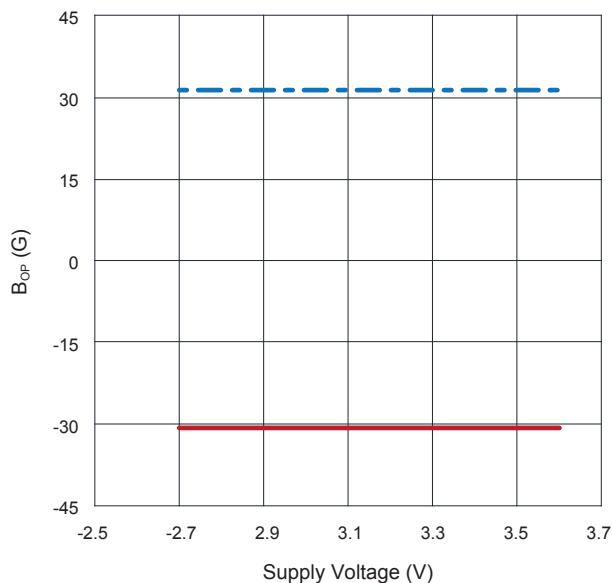

7.2 B_{RPN} (Blue) and B_{RPS} (Red) vs. Supply Voltage at $+25^\circ\text{C}$

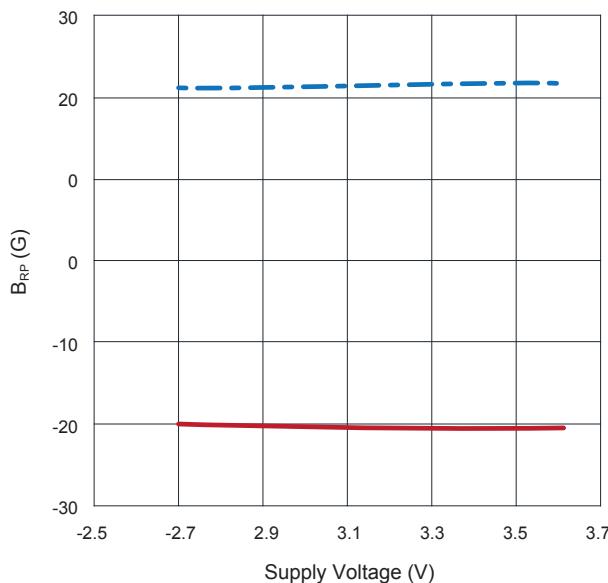


DISTRIBUTED BY TEXIM EUROPE


7 Graphs - Typical Magnetic Characteristics for RR121-1B13-311 and RR121-1B13-312

$V_{DD} = 3.0 \text{ V}$ and $T_A = +25^\circ\text{C}$, $C_{DD} = 1.0 \mu\text{F}$ (unless otherwise specified)

**7.3 B_{OPN} (Blue) and B_{OPS} (Red) vs.
Operating Temperature at $V_{DD}=3.0 \text{ V}$**

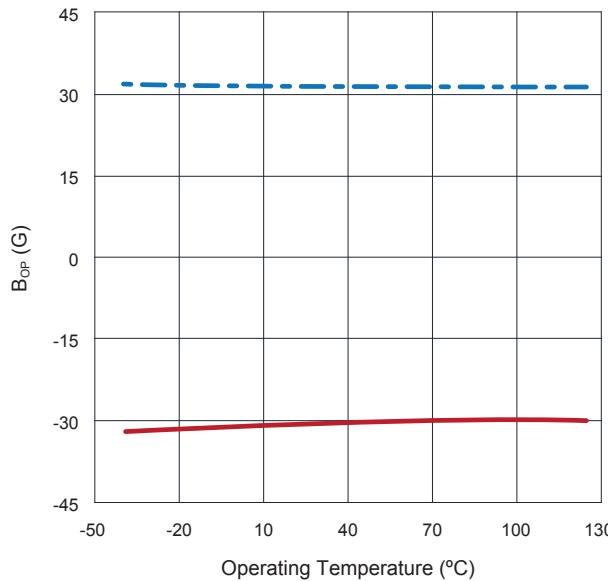


**7.4 B_{RPN} (Blue) and B_{RPS} (Red) vs.
Operating Temperature at $V_{DD}=3.0 \text{ V}$**

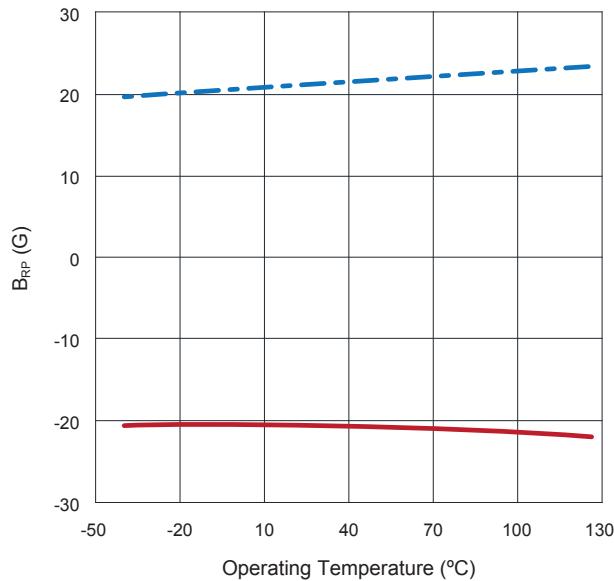


8 Operate & Release Lobe Plots

Operate and release distances shown are relative. The actual operate and release distances will depend on the type of magnet that is used.

8.1 RR121-1B13-311

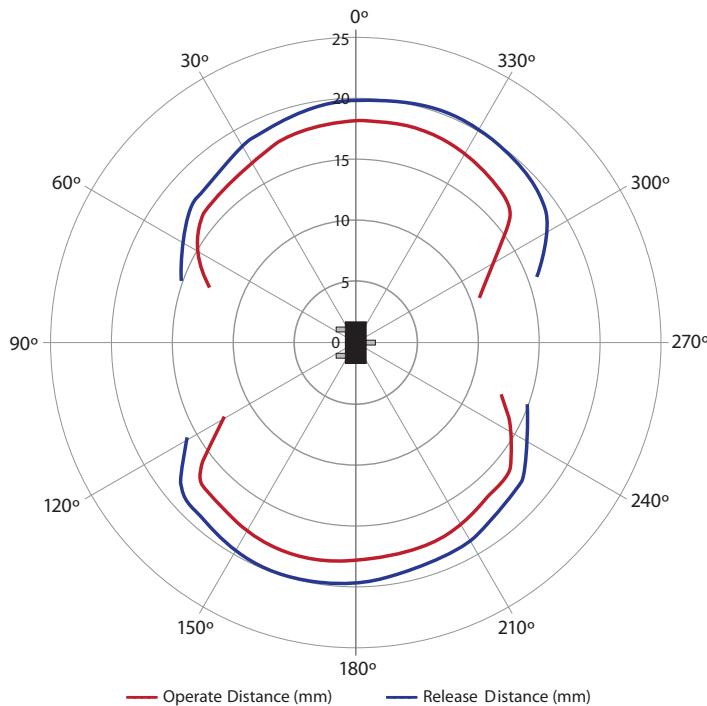

8.2 RR121-1B13-312

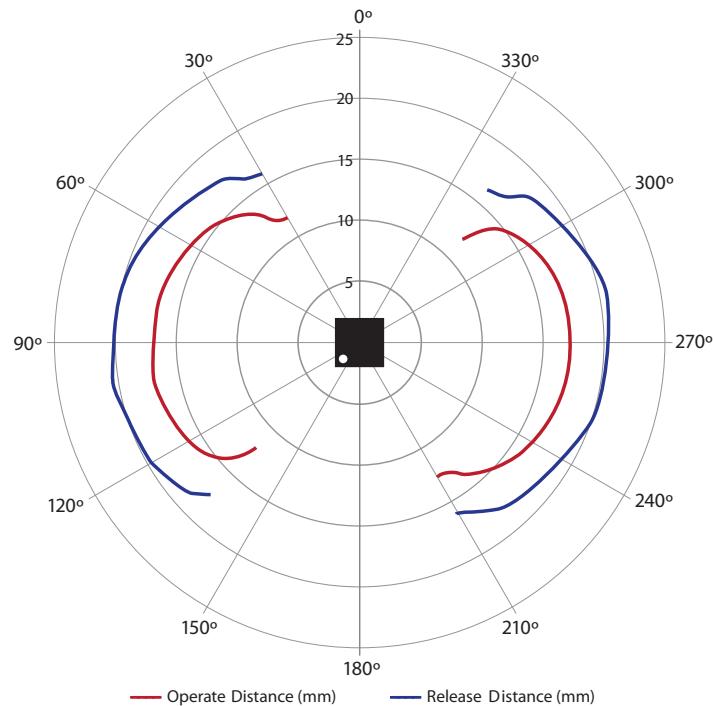

DISTRIBUTED BY TEXIM EUROPE

9 Operating Characteristics for RR121-1A23-311¹

Parameters	Units	Min	Typ	Max
Average Supply Current ($I_{DD\ (AVG)}$) ²	nA		230	700
Switching Frequency (f_{SW})	Hz	7	10	13
Active Mode Time (t_{ACT})	μs		1.4	
Idle Mode Time (t_{IDLE})	ms		100	
Operate Point (B_{OPN})	G	8	9	12
Operate Point (B_{OPS})	G	-12	-9	-8
Release Point (B_{RPN})	G	3	5	7
Release Point (B_{RPS})	G	-7	-5	-3
Hysteresis (B_{HYST}) ³	G	3	4	

Notes:

1. Unless otherwise specified, $V_{DD} = 2.7\text{ V}$ to 3.6 V , $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$. Typical values are $V_{DD} = 3.0\text{ V}$ and $T_A = +25^\circ\text{C}$.

2. Conditions: $t = 10$ seconds

3. Conditions: $B_{HYST} = B_{OP} - B_{RP}$

10 Operating Characteristics for RR121-1F23-311¹

Parameters	Units	Min	Typ	Max
Average Supply Current ($I_{DD\ (AVG)}$) ²	nA		230	700
Switching Frequency (f_{SW})	Hz	7	10	13
Active Mode Time (t_{ACT})	μs		1.4	
Idle Mode Time (t_{IDLE})	ms	77	100	143
Operate Point (B_{OPN})	G		70	
Operate Point (B_{OPS})	G		-70	
Release Point (B_{RPN})	G		50	
Release Point (B_{RPS})	G		-50	
Hysteresis (B_{HYST}) ³	G		20	

Notes:

1. Unless otherwise specified, $V_{DD} = 2.7\text{ V}$ to 3.6 V , $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$. Typical values are $V_{DD} = 3.0\text{ V}$ and $T_A = +25^\circ\text{C}$.

2. Conditions: $t = 10$ seconds


3. Conditions: $B_{HYST} = B_{OP} - B_{RP}$

DISTRIBUTED BY TEXIM EUROPE


11 Graphs - Typical Characteristics for RR121-1A23-311 and RR121-1F23-311

$V_{DD} = 3.0 \text{ V}$ and $T_A = +25^\circ\text{C}$, $C_{DD} = 1.0 \mu\text{F}$ (unless otherwise specified)


**11.1 Average Supply Current vs.
Supply Voltage vs. Temperature**

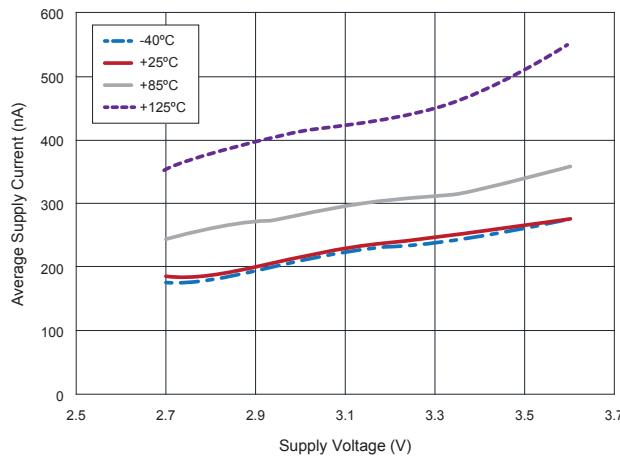

**11.2 Average Supply Current vs.
Temperature vs. Supply Voltage**

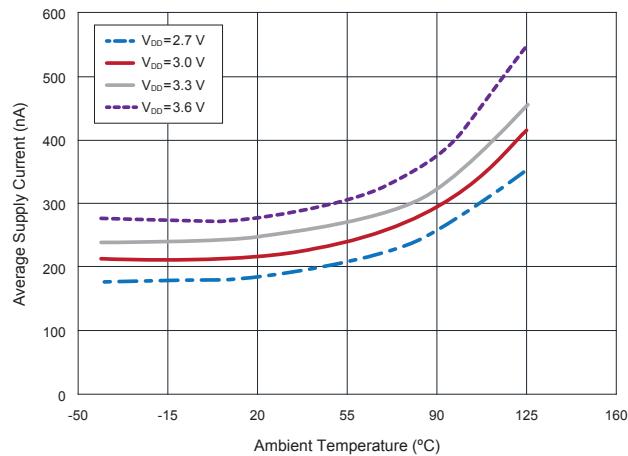

**11.3 Sampling Frequency vs.
Supply Voltage vs. Temperature**

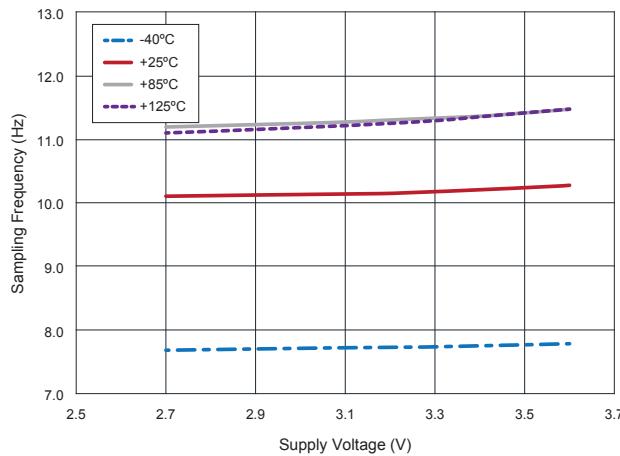


DISTRIBUTED BY TEXIM EUROPE


12 Graphs - Typical Magnetic Characteristics for RR121-1A23-311

$V_{DD} = 3.0 \text{ V}$ and $T_A = +25^\circ\text{C}$, $C_{DD} = 1.0 \mu\text{F}$ (unless otherwise specified)


**12.1 B_{OPN} (Blue) and B_{OPS} (Red) vs.
Supply Voltage at $+25^\circ\text{C}$**

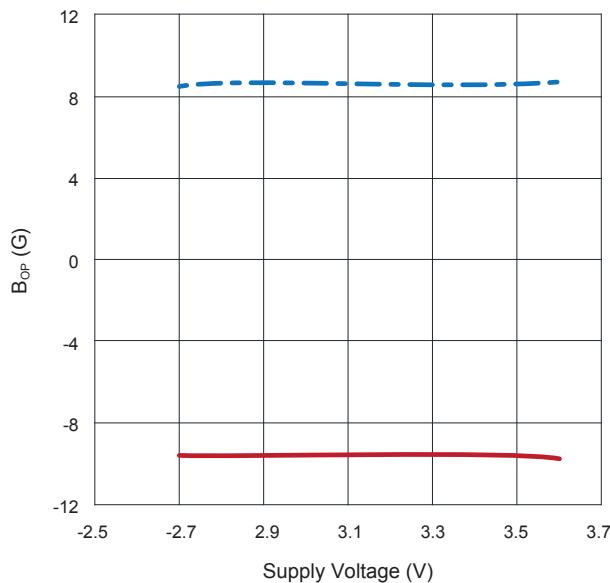


**12.2 B_{RPN} (Blue) and B_{RPS} (Red) vs.
Supply Voltage at $+25^\circ\text{C}$**

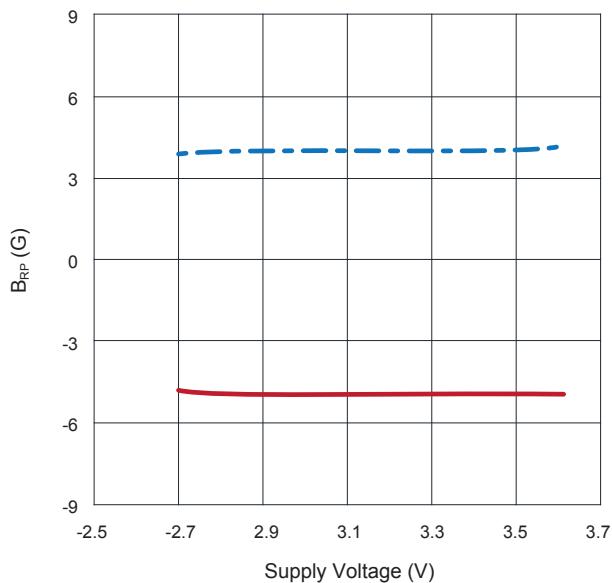

**12.3 B_{OPN} (Blue) and B_{OPS} (Red) vs.
Operating Temperature at $V_{DD}=3.0 \text{ V}$**

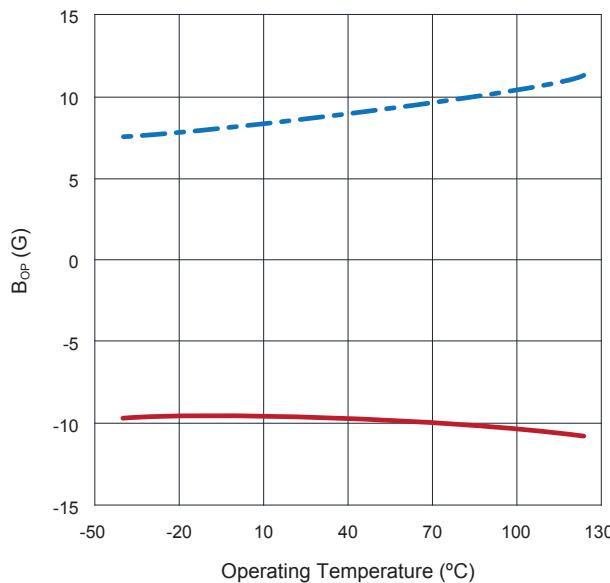

**12.4 B_{RPN} (Blue) and B_{RPS} (Red) vs.
Operating Temperature at $V_{DD}=3.0 \text{ V}$**

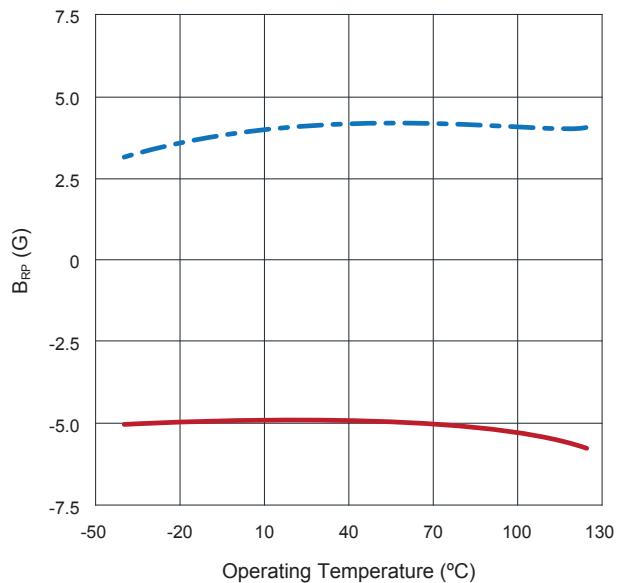


DISTRIBUTED BY TEXIM EUROPE

13 Operate & Release Lobe Plot

Operate and release distances shown are relative. The actual operate and release distances will depend on the type of magnet that is used.

13.1 RR121-1A23-311

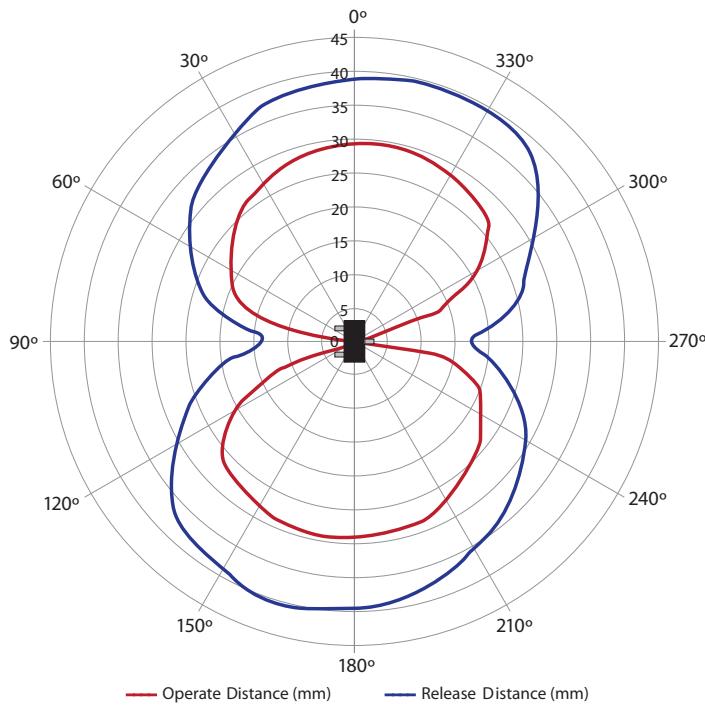

14 Operating Characteristics for RR121-1B53-311¹

Parameters	Units	Min	Typ	Max
Average Supply Current ($I_{DD(AVG)}$) ²	μA		1.4	2.5
Switching Frequency (f_{SW})	Hz	165	250	300
Active Mode Time (t_{ACT})	μs		1.4	
Idle Mode Time (t_{IDLE})	ms		4.0	
Operate Point (B_{OPN})	G	27	30	38
Operate Point (B_{OPS})	G	-38	-30	-27
Release Point (B_{RPN})	G	18	20	27
Release Point (B_{RPS})	G	-27	-20	-18
Hysteresis (B_{HYST}) ³	G	5	10	

Notes:

1. Unless otherwise specified, $V_{DD} = 2.7 V$ to $3.6 V$, $T_A = -40^\circ C$ to $+125^\circ C$. Typical values are $V_{DD} = 3.0 V$ and $T_A = +25^\circ C$.
2. Conditions: $t = 10$ seconds
3. Conditions: $B_{HYST} = B_{OP} - B_{RP}$

DISTRIBUTED BY TEXIM EUROPE

15 Operating Characteristics for RR121-1A53-311¹

Parameters	Units	Min	Typ	Max
Average Supply Current ($I_{DD\text{ (AVG)}}$) ²	μA		1.2	2.5
Switching Frequency (f_{sw})	Hz	165	250	300
Active Mode Time (t_{ACT})	μs		1.4	
Idle Mode Time (t_{IDLE})	ms	3.3	4.0	6.0
Operate Point (B_{OPN})	G	8	9	12
Operate Point (B_{OPS})	G	-12	-9	-8
Release Point (B_{RPN})	G	3	5	7
Release Point (B_{RPS})	G	-7	-5	-3
Hysteresis (B_{HYST}) ³	G	3	4	

Notes:

1. Unless otherwise specified, $V_{DD} = 2.7 \text{ V}$ to 3.6 V , $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$. Typical values are $V_{DD} = 3.0 \text{ V}$ and $T_A = +25^\circ\text{C}$.


2. Conditions: $t = 10$ seconds

3. Conditions: $B_{HYST} = B_{OP} - B_{RP}$


16 Graphs - Typical Characteristics for RR121-1B53-311 and RR121-1A53-311

$V_{DD} = 3.0 \text{ V}$ and $T_A = +25^\circ\text{C}$, $C_{DD} = 1.0 \mu\text{F}$ (unless otherwise specified)

**16.1 Average Supply Current vs.
Supply Voltage vs. Temperature**

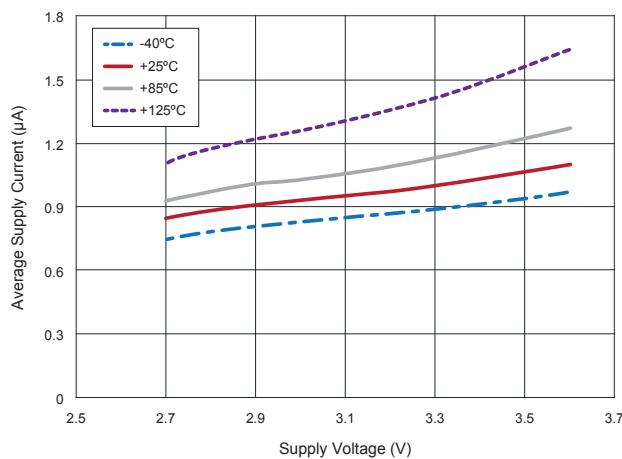

**16.2 Average Supply Current vs.
Temperature vs. Supply Voltage**

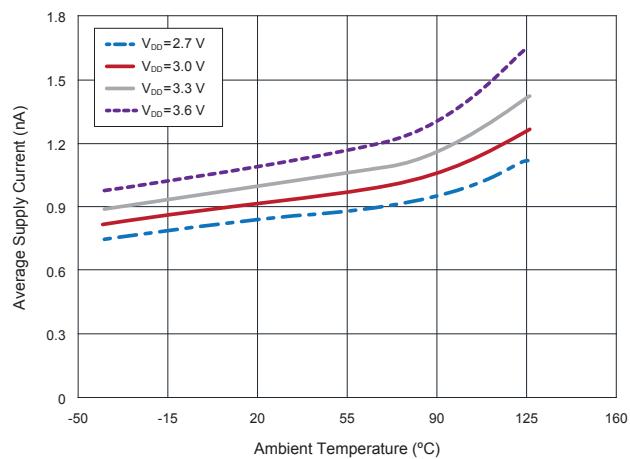


DISTRIBUTED BY TEXIM EUROPE

16 Typical Characteristics for RR121-1B53-311 and RR121-1A53-311

$V_{DD} = 3.0 \text{ V}$ and $T_A = +25^\circ\text{C}$, $C_{DD} = 1.0 \mu\text{F}$ (unless otherwise specified)


16.3 Sampling Frequency vs. Supply Voltage vs. Temperature

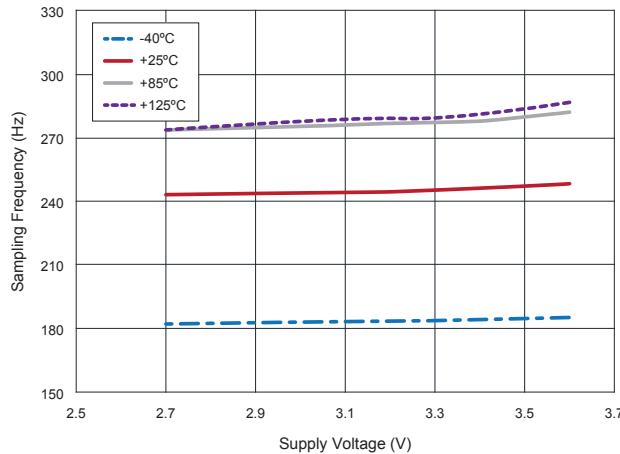


17 Graphs - Typical Magnetic Characteristics for RR121-1B53-311

$V_{DD} = 3.0 \text{ V}$ and $T_A = +25^\circ\text{C}$, $C_{DD} = 1.0 \mu\text{F}$ (unless otherwise specified)

17.1 B_{OPN} (Blue) and B_{OPS} (Red) vs. Supply Voltage at $+25^\circ\text{C}$

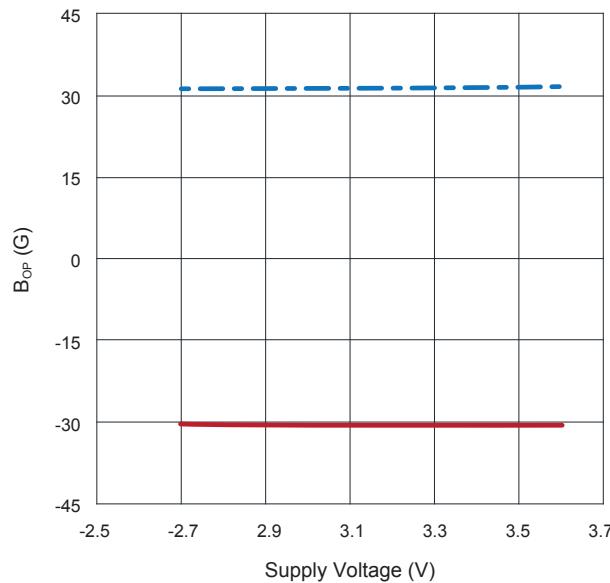

17.2 B_{RPN} (Blue) and B_{RPS} (Red) vs. Supply Voltage at $+25^\circ\text{C}$

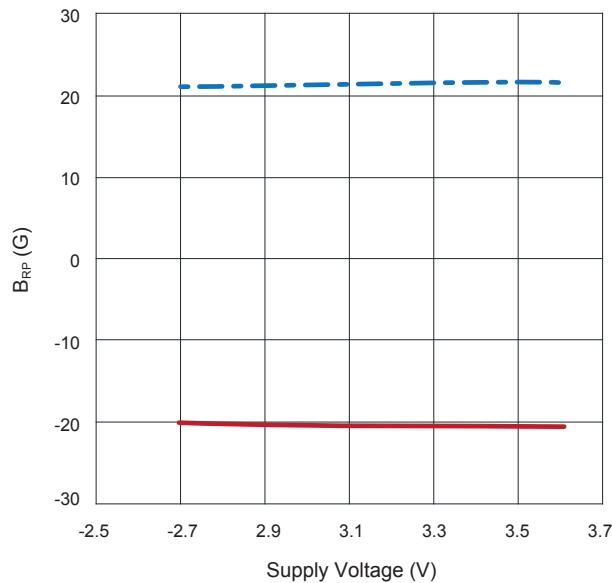


DISTRIBUTED BY TEXIM EUROPE


17 Graphs - Typical Magnetic Characteristics for RR121-1B53-311

$V_{DD} = 3.0 \text{ V}$ and $T_A = +25^\circ\text{C}$, $C_{DD} = 1.0 \mu\text{F}$ (unless otherwise specified)

**17.3 B_{OPN} (Blue) and B_{OPS} (Red) vs.
Operating Temperature at $V_{DD}=3.0 \text{ V}$**

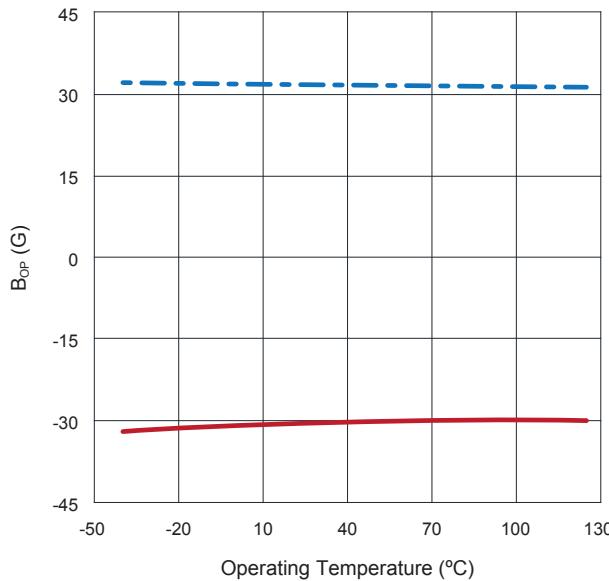


**17.4 B_{RPN} (Blue) and B_{RPS} (Red) vs.
Operating Temperature at $V_{DD}=3.0 \text{ V}$**

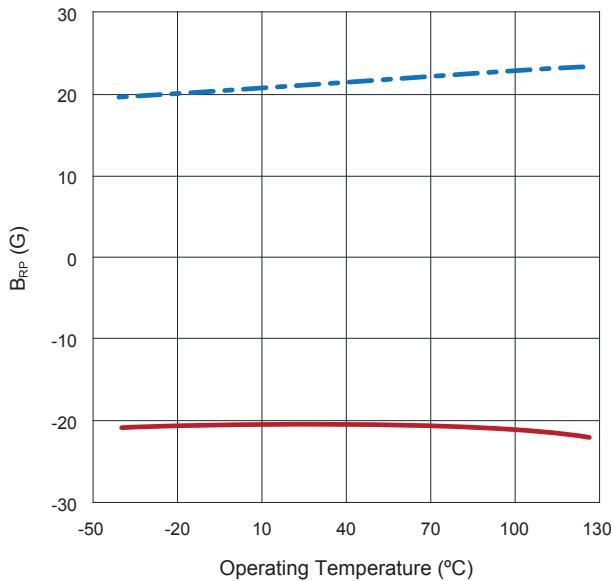

18 Operate & Release Lobe Plot

Operate and release distances show are relative. The actual operate and release distances will depend on the type of magnet that is used.

18.1 RR121-1B53-311

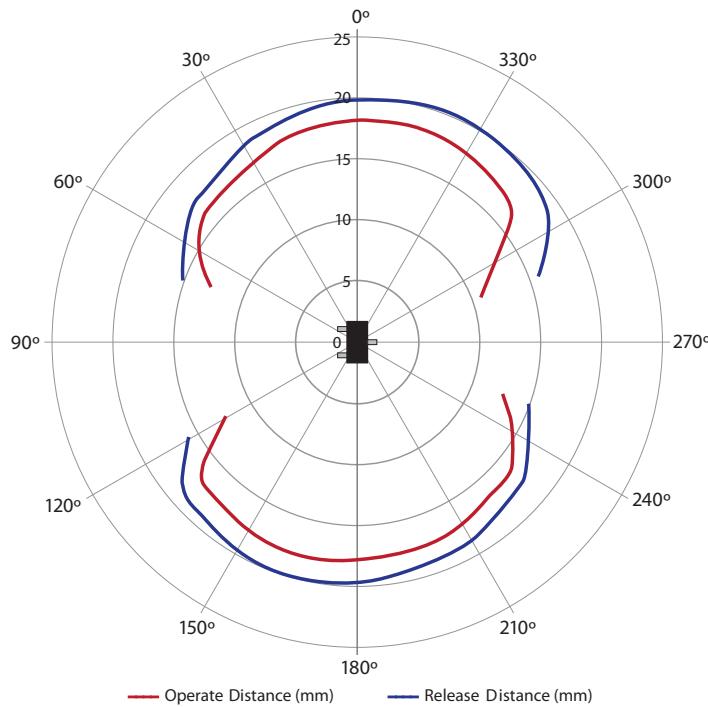

DISTRIBUTED BY TEXIM EUROPE

19 Operating Characteristics for RR121-3C63-311¹

Parameters	Units	Min	Typ	Max
Average Supply Current ($I_{DD\text{ (AVG)}}^2$)	μA		1.7	3.3
Switching Frequency (f_{SW})	Hz	325	500	600
Active Mode Time (t_{ACT})	μs		1.4	
Idle Mode Time (t_{IDLE})	ms		2.0	
Operate Point (B_{OPS})	G	8	10	14
Release Point (B_{RPN})	G	14	-10	-8

Notes:


1. Unless otherwise specified, $V_{DD} = 2.7 \text{ V}$ to 3.6 V , $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$. Typical values are $V_{DD} = 3.0 \text{ V}$ and $T_A = +25^\circ\text{C}$.

2. Conditions: $t=10$


20 Graphs - Typical Characteristics for RR121-3C63-311

$V_{DD} = 3.0 \text{ V}$ and $T_A = +25^\circ\text{C}$, $C_{DD} = 1.0 \mu\text{F}$ (unless otherwise specified)


**20.1 Average Supply Current vs.
Supply Voltage vs. Temperature**

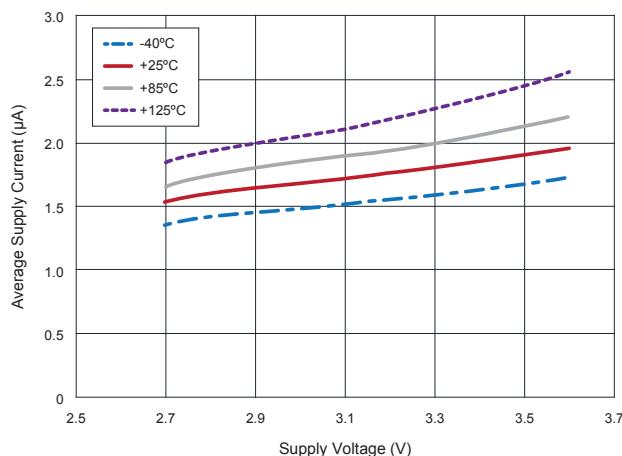

**20.2 Average Supply Current vs.
Temperature vs. Supply Voltage**

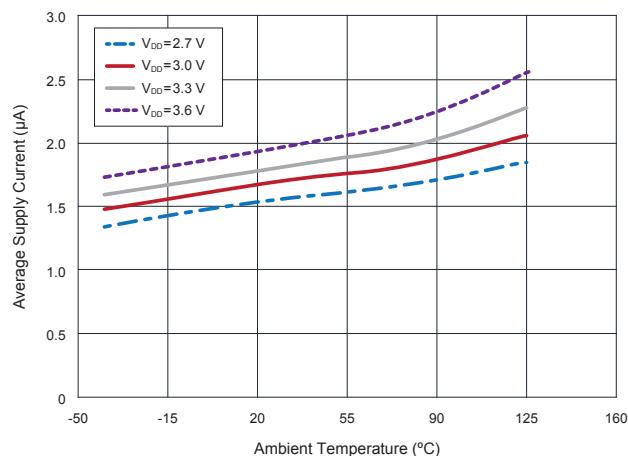

**20.3 Sampling Frequency vs.
Supply Voltage vs. Temperature**

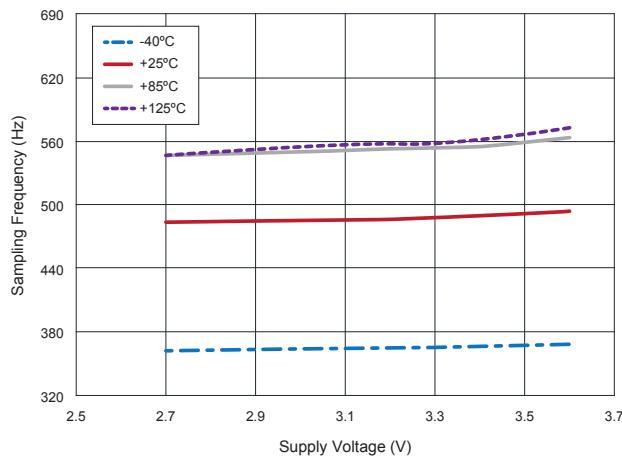

DISTRIBUTED BY TEXIM EUROPE

21 Operating Characteristics for RR121-1E73-311¹

Parameters	Units	Min	Typ	Max
Average Supply Current ($I_{DD\text{ (AVG)}}^2$)	μA		8	13
Switching Frequency (f_{SW})	Hz	1.63	2.50	3.25
Active Mode Time (t_{ACT})	μs		1.4	
Idle Mode Time (t_{IDLE})	ms	308	400	614
Operate Point (B_{OPN})	G	13	15	18
Operate Point (B_{OPS})	G	-18	-15	-13
Release Point (B_{RPN})	G	8	10	13
Release Point (B_{RPS})	G	-13	-10	-8
Hysteresis (B_{HYST}^3)	G	3	5	

Notes:

1. Unless otherwise specified, $V_{DD} = 2.7 \text{ V}$ to 3.6 V , $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$. Typical values are $V_{DD} = 3.0 \text{ V}$ and $T_A = +25^\circ\text{C}$.


2. Conditions: $t = 10$ seconds

3. Conditions: $B_{HYST} = B_{OP} - B_{RP}$


22 Graphs - Typical Characteristics for RR121-1E73-311

$V_{DD} = 3.0 \text{ V}$ and $T_A = +25^\circ\text{C}$, $C_{DD} = 1.0 \mu\text{F}$ (unless otherwise specified)

**22.1 Average Supply Current vs.
Supply Voltage vs. Temperature**

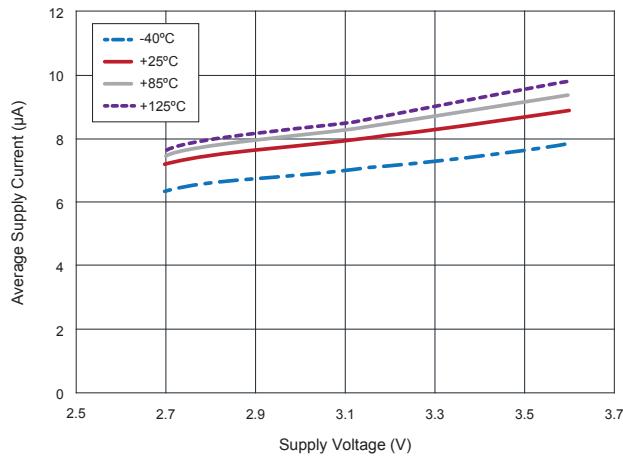

**22.2 Average Supply Current vs.
Temperature vs. Supply Voltage**

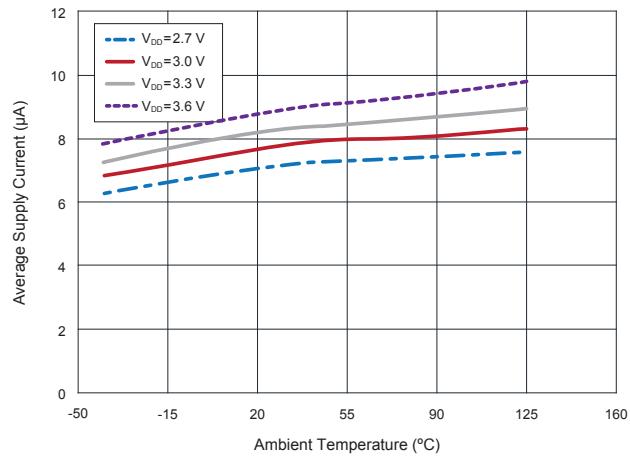


DISTRIBUTED BY TEXIM EUROPE

22 Typical Characteristics for RR121-1E73-311

$V_{DD} = 3.0 \text{ V}$ and $T_A = +25^\circ\text{C}$, $C_{DD} = 1.0 \mu\text{F}$ (unless otherwise specified)

22.3 Sampling Frequency vs. Supply Voltage vs. Temperature

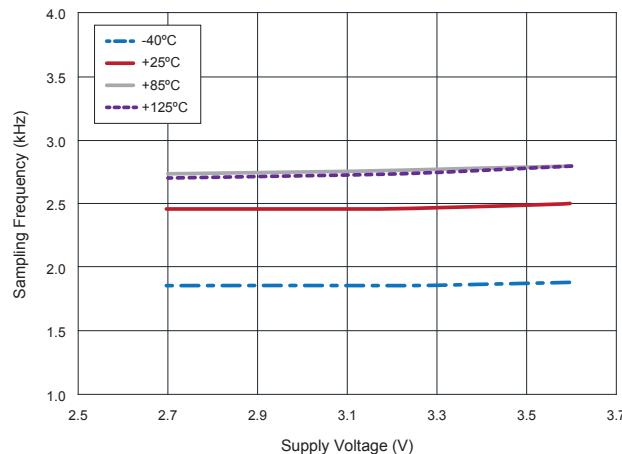

23 Operating Characteristics for RR121-1B93-312¹

Parameters	Units	Min	Typ	Max
Average Supply Current ($I_{DD(\text{AVG})}$) ²	μA		36	
Switching Frequency (f_{SW})	kHz	7	10	13
Active Mode Time (t_{ACT})	μs		1.4	
Idle Mode Time (t_{IDLE})	ms	77	100	143
Operate Point (B_{OPN})	G	27	30	38
Operate Point (B_{OPS})	G	-38	-30	-27
Release Point (B_{RPN})	G	18	20	27
Release Point (B_{RPS})	G	-27	-20	-18
Hysteresis (B_{HYST}) ³	G	5	10	

Notes:

1. Unless otherwise specified, $V_{DD} = 2.7 \text{ V}$ to 3.6 V , $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$. Typical values are $V_{DD} = 3.0 \text{ V}$ and $T_A = +25^\circ\text{C}$.

2. Conditions: $t = 10$ seconds


3. Conditions: $B_{HYST} = B_{OP} - B_{RP}$

DISTRIBUTED BY TEXIM EUROPE

24 Graphs - Typical Characteristics for RR121-1B93-312

$V_{DD} = 3.0 \text{ V}$ and $T_A = +25^\circ\text{C}$, $C_{DD} = 1.0 \mu\text{F}$ (unless otherwise specified)


24.1 Sampling Frequency vs. Supply Voltage vs. Temperature

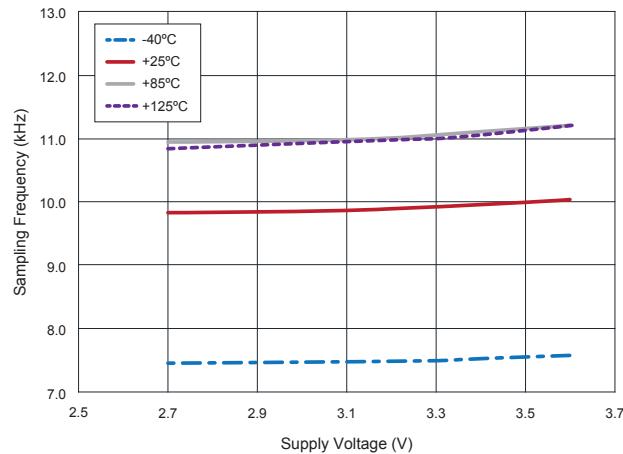


25 Graphs - Typical Magnetic Characteristics for RR121-1B93-312

$V_{DD} = 3.0 \text{ V}$ and $T_A = +25^\circ\text{C}$, $C_{DD} = 1.0 \mu\text{F}$ (unless otherwise specified)

25.1 B_{OPN} (Blue) and B_{OPS} (Red) vs. Supply Voltage at $+25^\circ\text{C}$

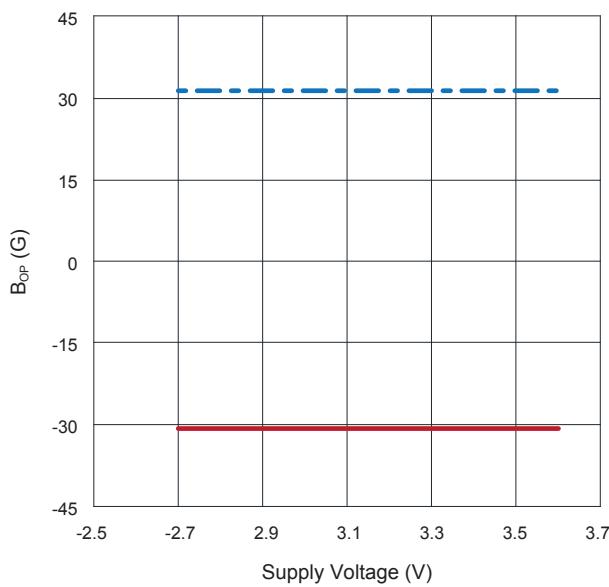

25.2 B_{RPN} (Blue) and B_{RPS} (Red) vs. Supply Voltage at $+25^\circ\text{C}$

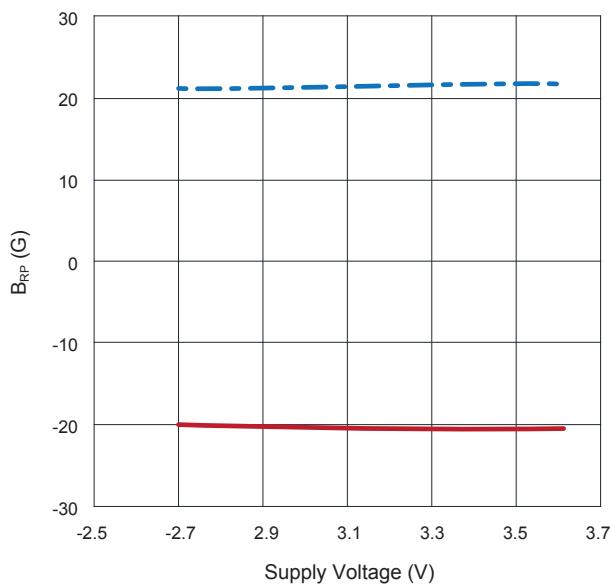


DISTRIBUTED BY TEXIM EUROPE


25 Typical Magnetic Characteristics for RR121-1B93-312

$V_{DD} = 3.0 \text{ V}$ and $T_A = +25^\circ\text{C}$, $C_{DD} = 1.0 \mu\text{F}$ (unless otherwise specified)

**25.3 B_{OPN} (Blue) and B_{OPS} (Red) vs.
Operating Temperature at $V_{DD}=3.0 \text{ V}$**

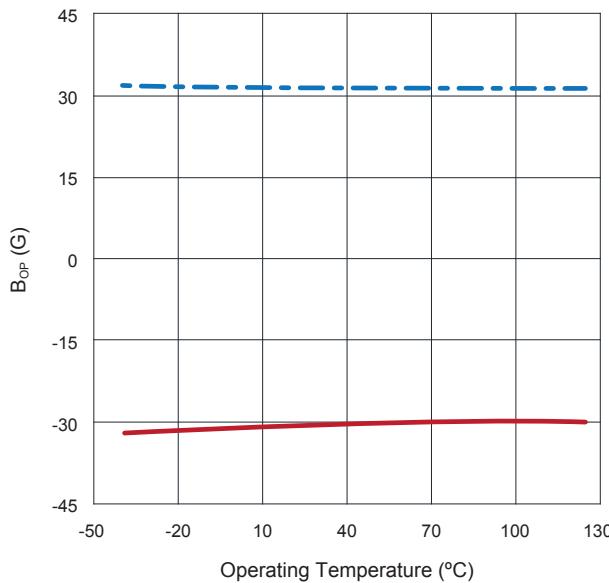


**25.4 B_{RPN} (Blue) and B_{RPS} (Red) vs.
Operating Temperature at $V_{DD}=3.0 \text{ V}$**

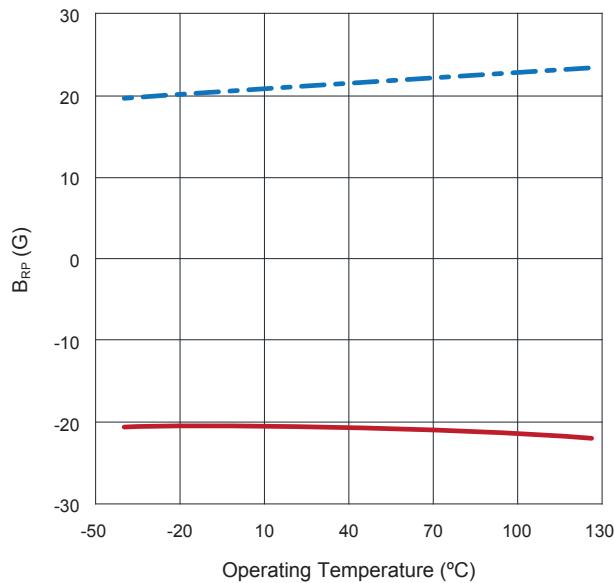


26 Application Information

26.1 Application Circuit (SOT-23)

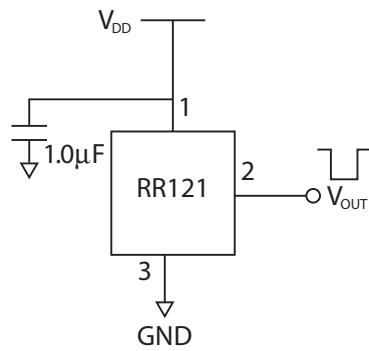

26.2 Application Circuit (LGA-4)

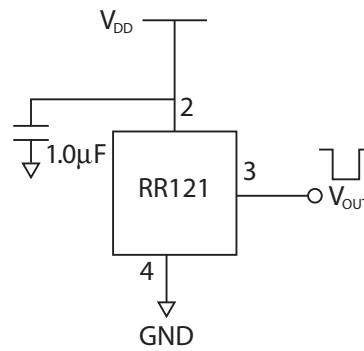

RR121 Push-Pull Output Application Circuit

The output voltage on the RR121 is active low, meaning that while a sufficiently strong magnetic field is present, the output voltage is low. The output voltage can be connected to a digital I/O pin on a microcontroller. A decoupling capacitor between the supply voltage and ground is required with placement close to the magnetic sensor. A typical capacitor value of $1.0 \mu\text{F}$ will suffice.

DISTRIBUTED BY TEXIM EUROPE

27 Part Selection and Ordering Information

27.1 Part Selection Table

Part Number	Magnetic Polarity Response	Operate Sensitivity (G)	Release Sensitivity (G)	Frequency (Hz)	I_{avg} (μA)	Temp. Rating ($^{\circ}C$)	Supply Voltage (V_{dd})	Output Response	Package
RR121-1B13-312	Omnipolar	30	20	2	0.20	-40 - +125	2.7 - 3.6	Active Low	LGA-4
RR121-1B13-311	Omnipolar	30	20	2	0.20	-40 - +125	2.7 - 3.6	Active Low	SOT-23-3
RR121-1B53-311	Omnipolar	30	20	250	1.44	-40 - +125	2.7 - 3.6	Active Low	SOT-23-3
RR121-1A23-311	Omnipolar	9	5	10	0.24	-40 - +125	2.7 - 3.6	Active Low	SOT-23-3
RR121-3C63-311	Bipolar	10	-10	500	1.70	-40 - +125	2.7 - 3.6	Active Low	SOT-23-3
RR121-1F23-311	Omnipolar	70	50	10	0.24	-40 - +125	2.7 - 3.6	Active Low	SOT-23-3
RR121-1A53-311	Omnipolar	9	5	250	1.44	-40 - +125	2.7 - 3.6	Active Low	SOT-23-3
RR121-1E73-311	Omnipolar	15	10	2500	8	-40 - +125	2.7 - 3.6	Active Low	SOT-23-3
RR121-1B93-312	Omnipolar	30	20	10000	36	-40 - +125	2.7 - 3.6	Active Low	LGA-4


Note:

1. Custom options available for Sensitivity, Frequency, Temperature Rating, Supply Voltage, Output Response & more.


Please contact redrock@cotorelay.com for more details.

27.2 Device Nomenclature

Ordering Information

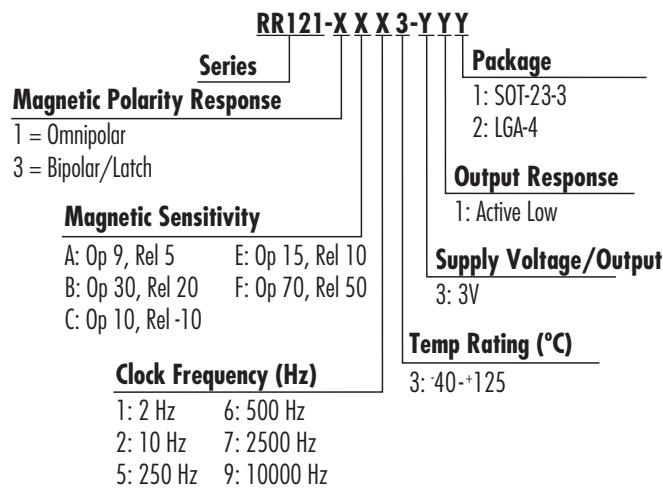


28 Axis of Sensitivity

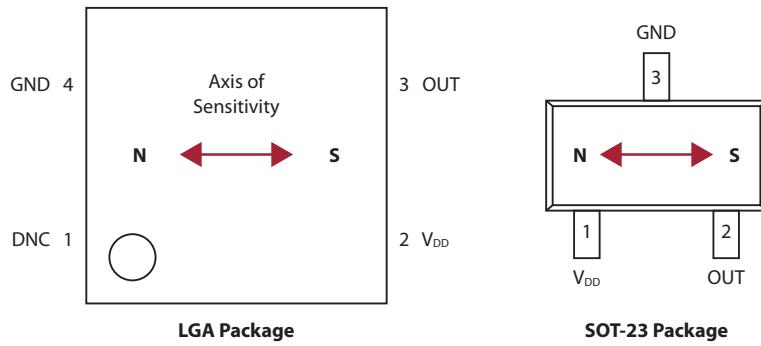


DISTRIBUTED BY TEXIM EUROPE

29 Dimensions Millimeters (Inches)

29.1 LGA-4 Package

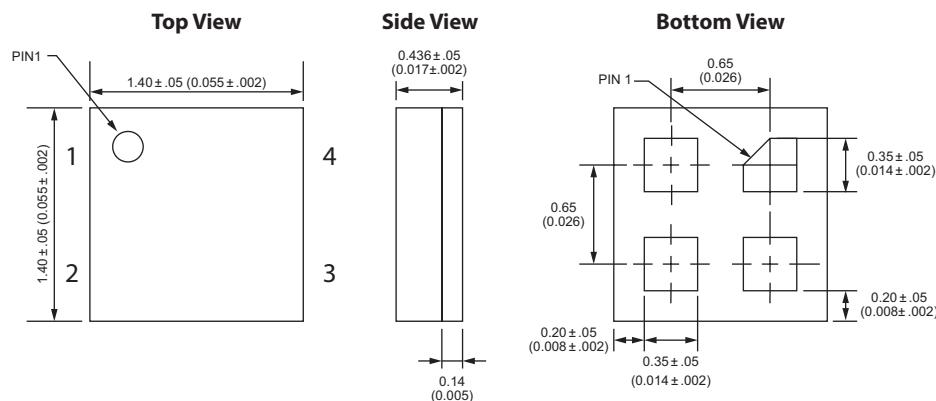


29.2 SOT-23-3 Package

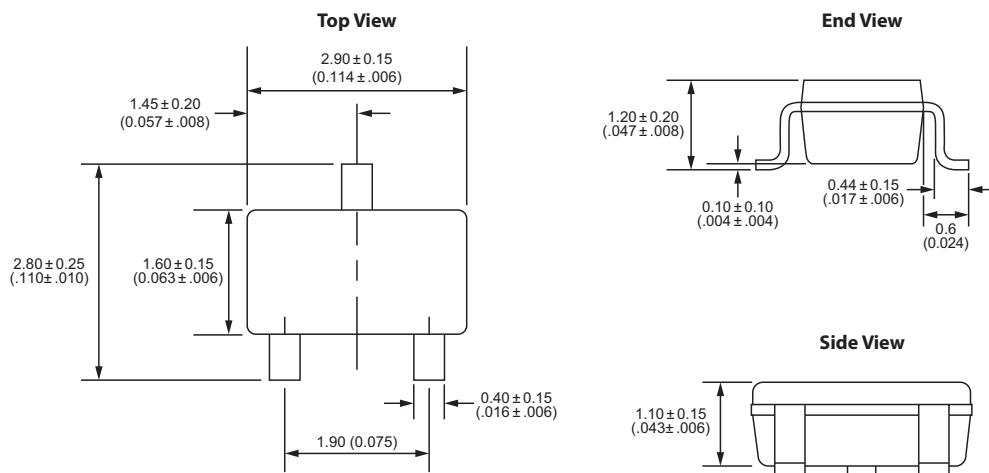


30 TMR Sensor Location

30.1 LGA Package

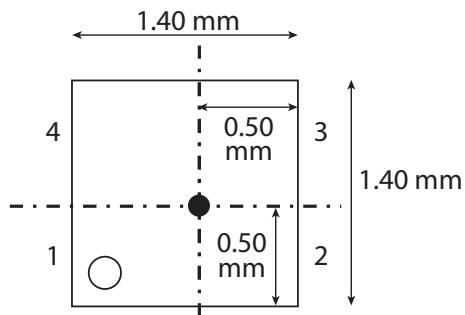


30.2 SOT Package

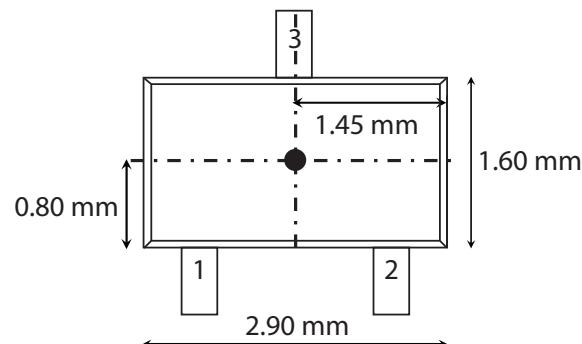


DISTRIBUTED BY TEXIM EUROPE

31 Magnetic Flux Response Diagrams

31.1 Omnipolar Magnetic Flux Response (Active Low Option)

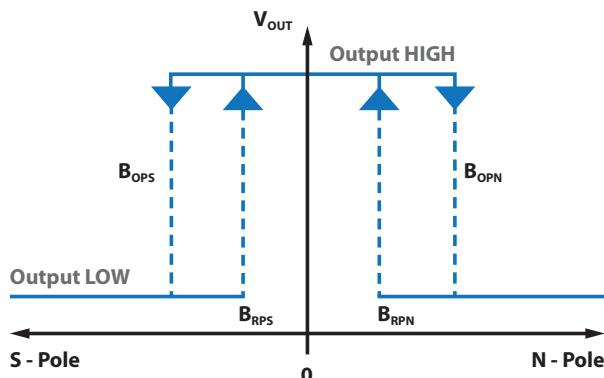

31.2 Bipolar Magnetic Flux Response (Active Low Option)

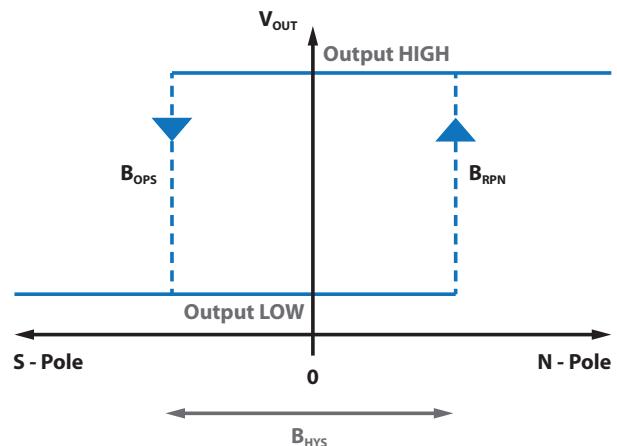

32 Output Behavior vs. Magnetic Field Diagrams

32.1 Output Behavior vs. Magnetic Field - Omnipolar

Characteristics	Conditions	Output
South Pole	$B < B_{OPS}$ $0 > B > B_{RPS}$	Low (ON) High (OFF)
North Pole	$B > B_{OPN}$ $0 < B < B_{RPN}$	Low (ON) High (OFF)

32.2 Output Behavior vs. Magnetic Field - Bipolar

Characteristics	Conditions	Output
South Pole	$B < B_{OPS}$	Low (ON)
North Pole	$B > B_{RPN}$	High (OFF)

DISTRIBUTED BY TEXIM EUROPE

33TMR Sensor & Switch Packaging

33.1 SOT-23-3 Tape & Reel Packaging

Standard packaging is Tape & Reel containing 3,000 pieces. MSL Rating is 1.

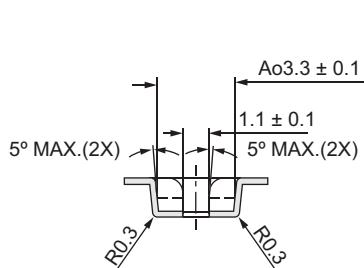
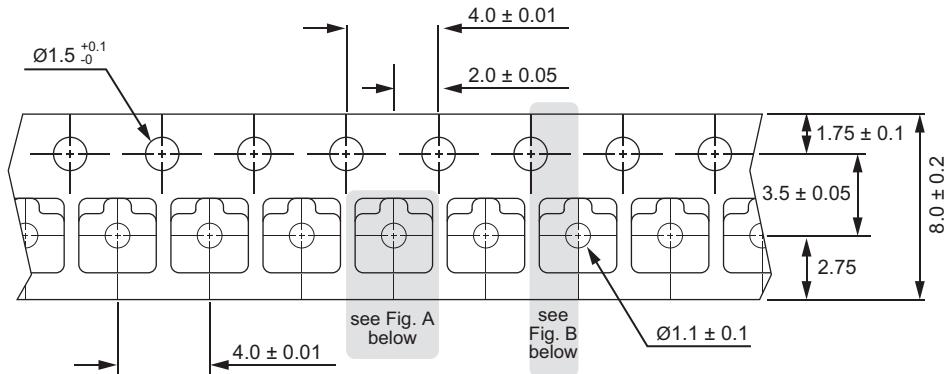


Fig. A


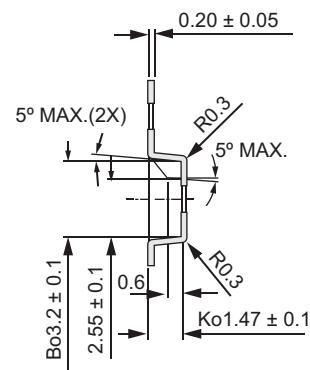


Fig. B

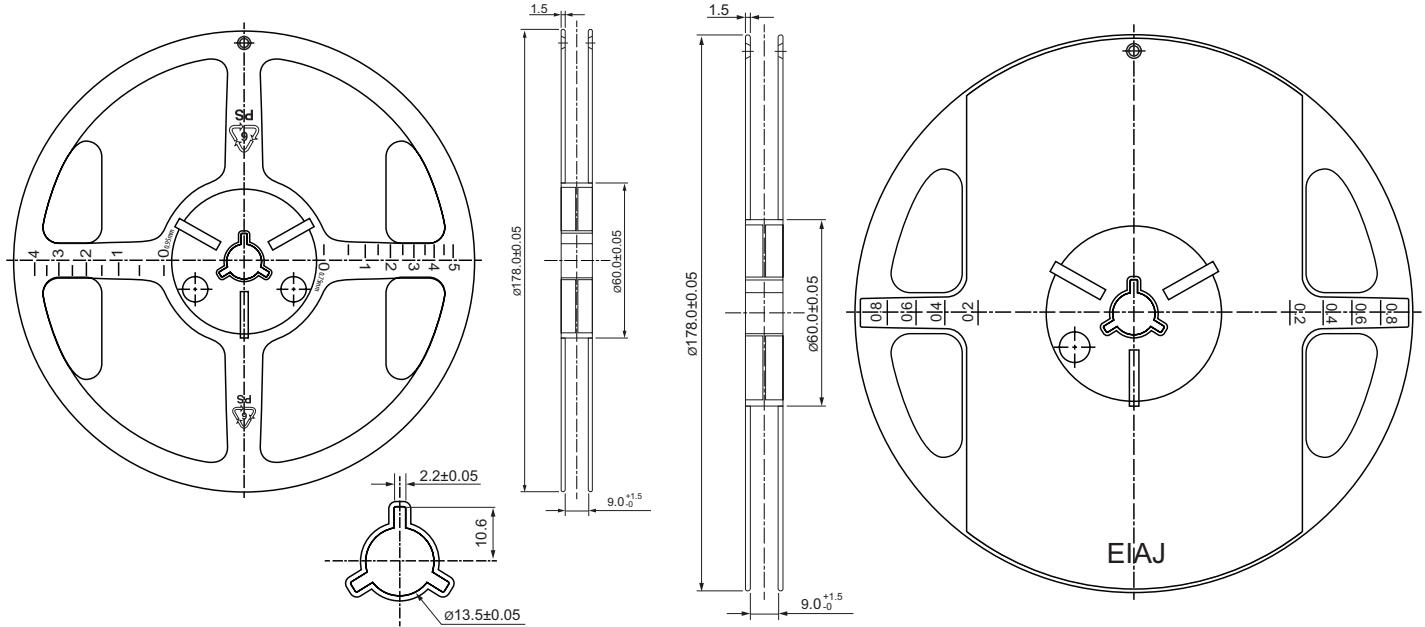

DISTRIBUTED BY TEXIM EUROPE

33 TMR Sensor & Switch Packaging

33.2 LGA-4 Tape & Reel Packaging

Standard packaging is Tape & Reel containing 3,000 pieces. MSL Rating is 3.


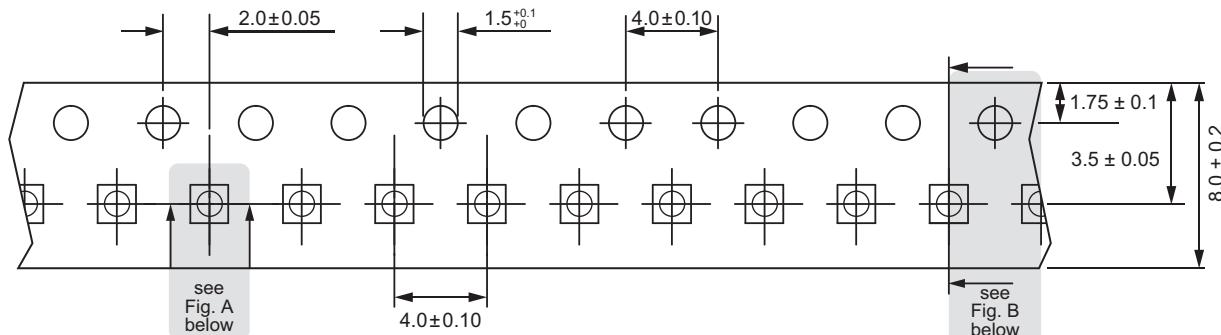


Fig. A





Fig. B

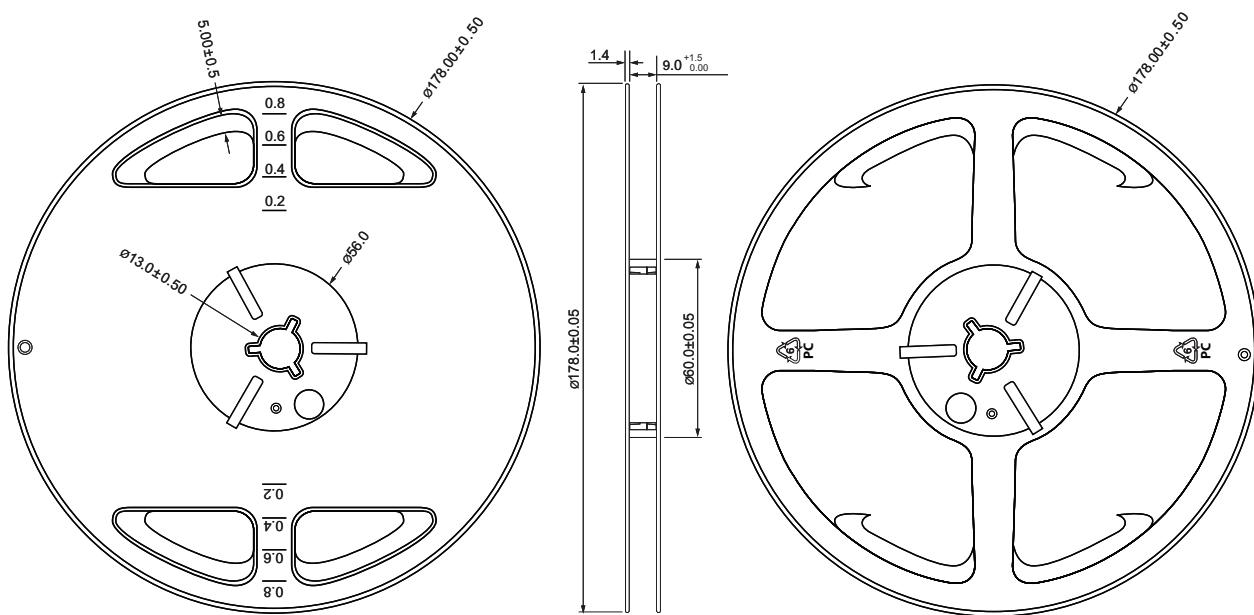


DISTRIBUTED BY TEXIM EUROPE

34 Suggested Pb-Free Reflow Profile


Notes:

1. Fully compatible with standard no-lead solder profile, 260 °C for 30 seconds max (3 cycles max).
2. Profile shown as example. Users are advised to develop their own board-level profile.
3. Suggested Pb-free reflow profile derived from IPC/JEDEC J-STD-020E.
4. Temperature tolerance: +0 °C, as measured at any point on the package or leads
5. MSL rating of 1 (SOT-23-3 only) compatible with J-STD-020 or equivalent.
6. MSL rating of 3 (LGA-4 only) compatible with J-STD-020 or equivalent.
7. All temperatures refer to the center of the package, measured on the package body surface that is facing up during assembly reflow (e.g., live-bug). If parts are reflowed in other than the normal live bug assembly reflow orientation (i.e., dead-bug), T_p shall be within ± 2 °C of the live bug T_p and still meet the T_c requirements, otherwise, the profile shall be adjusted to achieve the latter. To accurately measure actual peak package body temperatures, refer to JEP140 for recommended thermocouple use.
8. Reflow profiles in this document are for classification/preconditioning and are not meant to specify board assembly profiles. Actual board assembly profiles should be developed based on specific process needs and board designs and should not exceed the parameters in this table.

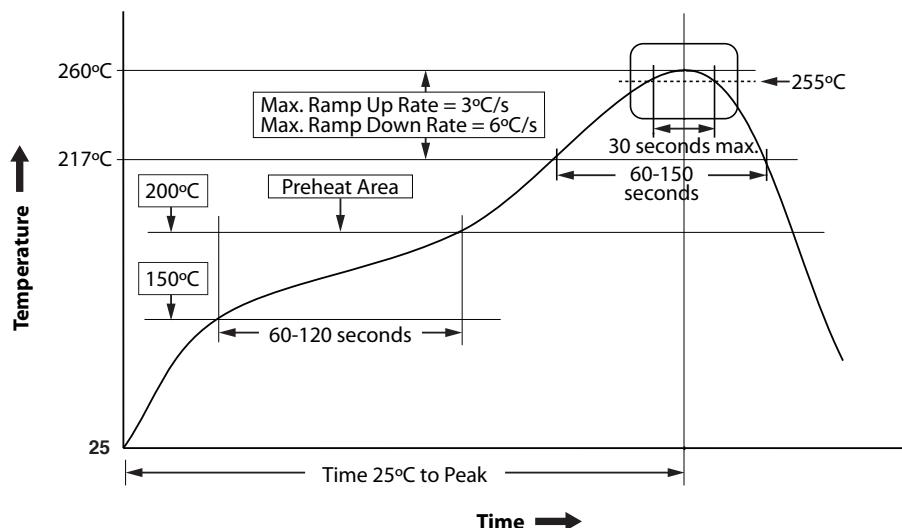


35 Suggested Solder Pad Layout

35.1 SOT -23-3 Solder Pad Layout

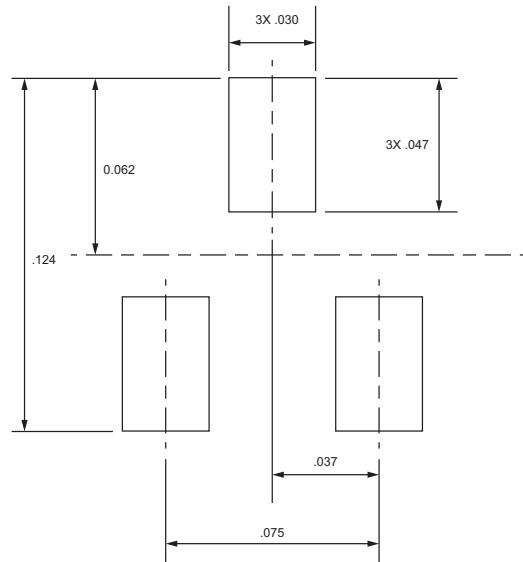

35.2 LGA-4 Solder Pad Layout

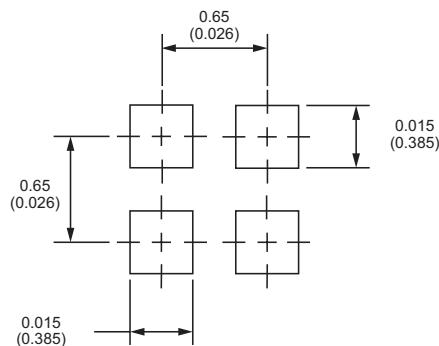

DISTRIBUTED BY TEXIM EUROPE



Contact details

The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com