


TECHNICAL DATA SHEET

RRC2130

RRC2130

Standard Battery Pack Li-Ion
7.20V / 4.17Ah / 30.02Wh

Distributed by:

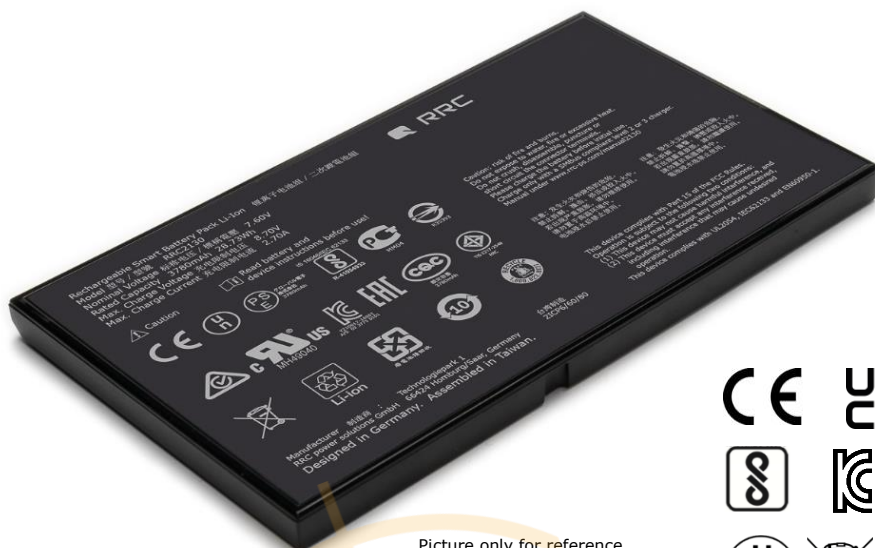

Picture only for reference



Features

- Worldwide approvals and certification of safety standards
- No development costs, fast time-to-market
- Smart batteries with numerous features according to the SMBus specification
- State-of-the-art lithium-ion cells with the market's highest energy density
- High discharge performance
- JEITA charging profile optimization
- Numerous and redundant safety features
- Increased ESD protection up to 8.00kV
- Up to 80% of initial capacity after 800 cycles

Applications

Suitable for use in slim devices for industrial and medical applications, etc.

TECHNICAL DATA SHEET

RRC2130

Specification

General	
Delivery status battery capacity	<30%
Compliance information	IEC 62133 / CE / UL2054 / FCC / UKCA / PSE / KC / BSMI / GOST-R / CMIM / CQC / RCM / BIS / TISI / UN 38.3 / RoHS / REACH
Operating temperature	0°C to 45°C (charge) -20°C to 60°C (discharge)
Storage temperature	-20°C to 50°C max. -20°C to 25°C recommended
PN	110088

Electrical Parameters	
Nominal voltage	7.20V
Nominal capacity	4.17Ah
Initial impedance	<180mΩ @ 1kHz at 25°C
Max. charge current	2.70A
Max. charge voltage	8.40V
Max. discharge current	6.00A






Battery Dimensions	
Length	150.60mm +0.50/-0.50
Width	86.20mm +0.40/-0.40
Thickness	8.35mm +0.25/-0.25
Weight	172g
Contacts	+, +, C, D, T, -, -
Ingress protection	IP40

Safety Features	
CUV (Cell Under Voltage)	Protection against deep discharge
COV (Cell Over Voltage)	Protection against over charge
OTC (Over Temperature in Charge)	Protection against overheating while charging
OTD (Over Temperature in Discharge)	Protection against overheating during discharging

TECHNICAL DATA SHEET

RRC2130

Recommended Accessories

Type	Product	P/N	Application
Standard Battery Charger	 RRC-SMB-FPC	110083	40.00W standard battery charger for optimized charging process with external power supply for world-wide use.
Power Supply AC/DC	 PS65	210919	External power supply (worldwide use) for embedded battery charger RRC-PMM240 or for mobile devices. Included in RRC-SMB-FPC.
AC Power Cable	 <ul style="list-style-type: none"> US-Version 210950 EU-Version 210951 UK-Version 211333 AU-Version 211334 CN-Version 211959 		Country specific power cable for PS65.
Car Adapter DC/DC	 RRC-SMB-CAR	110041	90.00W car adapter with USB charging port. Power supplying in cars and trucks for RRC-SMB-FPC, RRC-PMM240 or mobile devices
Battery Mating Connector	 <ul style="list-style-type: none"> RRC-MC21-90-10 211268 RRC-MC21-90-20 211278 		Mating Connector for standard smart batteries RRC2130, RRC2140. Available for 90° PCB mounting (top and edge).

Germany/Headquarters

RRC power solutions GmbH
 Technologiepark 1
 66424 Homburg / Saar

Tel.: +49 6841 98090
 Fax: +49 6841 9809280
 Email: sales@rrc-ps.de
 Web: www.rrc-ps.com

USA

RRC power solutions Inc.
 18340 Yorba Linda Blvd.,
 # 107-437
 Yorba Linda, CA 92886

Tel.: +1 714 777 3604
 Fax: +1 714 777 3658
 Email: usa@rrc-ps.com
 Web: www.rrc-ps.com

Hong Kong

RRC power solutions Ltd.
 S-V,6/F, Valiant Industrial
 Centre 2-12 Au Pui Wan Street
 Fo Tan, N.T., Hong Kong

Tel.: +852 2376 0106
 Fax: +852 2375 0107
 Email: hkrcc@rrc-ps.cn
 Web: www.rrc-ps.cn

China

RRC power solutions Ltd.
 Room 1306, C Building,
 Tianan International building,
 Renmin South Road, Luohu
 District, Shenzhen 518021

Tel.: +86 755 8374 1908
 Fax: +86 755 8374 1861
 Email: hkrcc@rrc-ps.cn
 Web: www.rrc-ps.cn

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.


It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

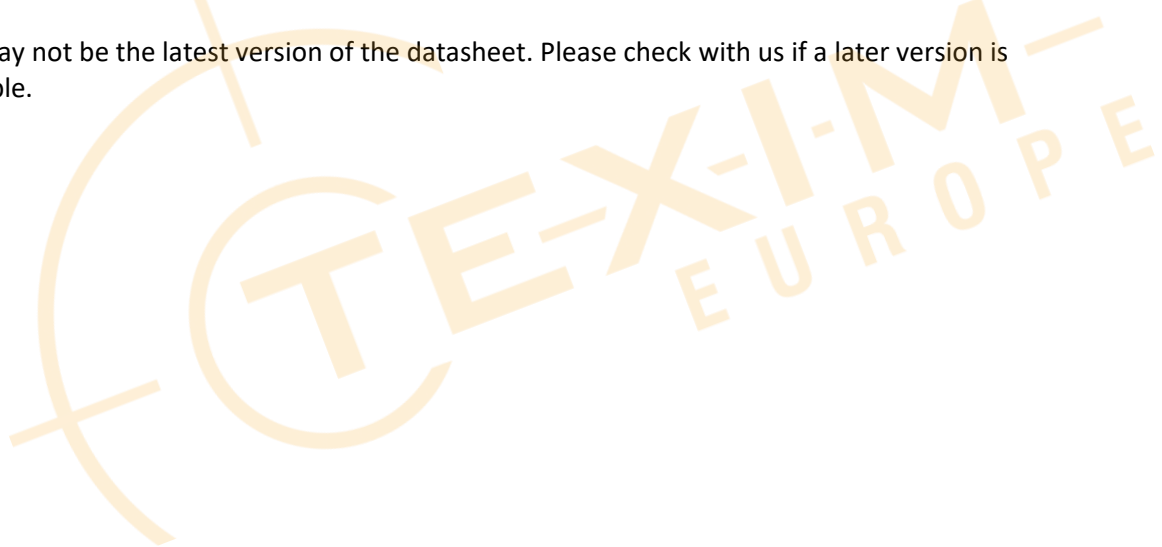



Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik


T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com

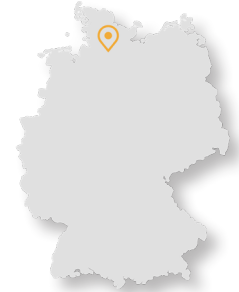

Germany - North

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany - South

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
E: austria@texim-europe.com



Nordic

Søndre Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Via Matteotti 43
IT-20864 Agrate Brianza (MB)

T: +39 (0)39 9713293
E: italy@texim-europe.com