

## WINSTAR Display

# **OLED SPECIFICATION**


Model No:

WEA012832K

## **General Specification**

Item	Dimension	Unit			
Dot Matrix	128 x 32	Dots			
Module dimension	59.0× 18.86 × 5.96Max.	mm			
Active Area	50.535 ×10.695	mm			
Pixel Size	0.370 × 0.310	mm			
Pixel Pitch	0.395 × 0.335	mm			
Display Mode	Passive Matrix				
Display Color	Monochrome				
Interface	4-Wire SPI				
Drive Duty	1/32 Duty				
IC	SSD1315				
Size	2.0 inch				

## Contour Drawing & Block Diagram

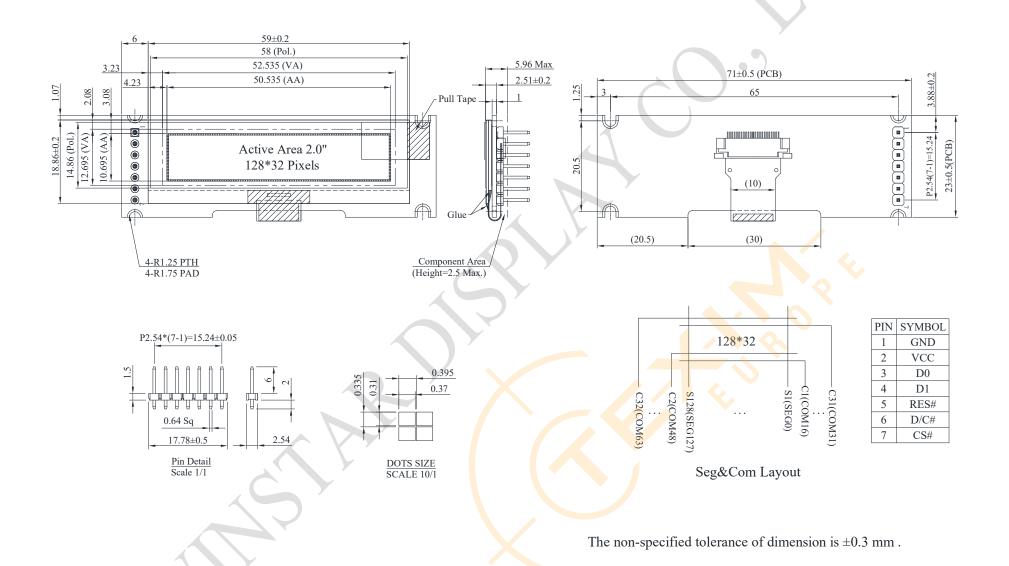

## **Interface Pin Function**

No.	Symbol	Function
1	GND	Ground.
2	VCC	Power supply pin for core logic operation.
3	D0	The serial clock input
4	D1	The serial data input
5	RES#	This pin is reset signal input. When the pin is pulled LOW, initialization of the chip is executed. Keep this pin HIGH (i.e. connect to VDD) during normal operation.
6	D/C#	This pin is Data/Command control pin connecting to the MCU.  When the pin is pulled HIGH, the data at D1 will be interpreted as data.  When the pin is pulled LOW, the data at D1 will be transferred to a command register.  In I2C mode, this pin acts as SA0 for slave address selection.
7	CS#	This pin is the chip select input connecting to the MCU.  The chip is enabled for MCU communication only when CS# is pulled LOW (active LOW).

## **5.Absolute Maximum Ratings**

Parameter	Symbol	Min	Тур.	Max	Unit
Supply Voltage for Display	VCC	-0.3	-	4	<
Operating Temperature	TOP	-40	-	+80	°C
Storage Temperature	TSTG	-40	-	+85	°C

## **Electrical Characteristics**

### **DC Electrical Characteristics**

Items	Symbol	Condition	Min.	Тур.	Max.	Unit
Supply Voltage for Logic	VCC	-	2.8	3.0	3.3	V
High Level Input	VIH		0.8xVCC	_	VCC	V
Low Level Input	VIL		0	-	0.2xVCC	V
High Level Output	VOH	_	0.9xVCC	<u> </u>	VCC	V
Low Level Output	VOL		0	/_ /_ /	0.1xVCC	V
Display 50% Pixel on	ICC	VCC =3V		40	80	mA

**11"** WINSTAR

### **Disclaimer**

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.

It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.



## Texim Europe - contact details



## **Headquarters & Warehouse**

Elektrostraat 17 NL-7483 PG Haaksbergen The Netherlands

T: +31 (0)53 573 33 33 E: info@texim-europe.com Homepage: www.texim-europe.com







### The Netherlands

Elektrostraat 17 NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33 E: nl@texim-europe.com



### Belgium

Zuiderlaan 14, box 10 B-1731 Zellik

T: +32 (0)2 462 01 00 E: belgium@texim-europe.com



### **UK & Ireland**

St Mary's House, Church Lane Carlton Le Moorland Lincoln LN5 9HS

T: +44 (0)1522 789 555 E: uk@texim-europe.com



### Germany

Bahnhofstrasse 92 D-25451 Quickborn

T: +49 (0)4106 627 07-0 E: germany@texim-europe.com



### Germany

Martin-Kollar-Strasse 9 D-81829 München

T: +49 (0)89 436 086-0 E: muenchen@texim-europe.com



### Austria

Warwitzstrasse 9 A-5020 Salzburg

T: +43 (0)662 216 026 E: austria@texim-europe.com



#### Nordic

Stockholmsgade 45 2100 Copenhagen

T: +45 88 20 26 30 E: nordic@texim-europe.com



### Italy

Martin-Kollar-Strasse 9 D-81829 München

T: +49 (0)89 436 086-0 E: italy@texim-europe.com