



GREEN ELECTRONICS



CSF

Terminal Blocks and Connectors for Printed Circuit Boards



ISO
9001



ISO
14001



BS OHSAS
18001:2007



SAUR®
ELECTRONIC CONNECTORS

Distributed by:



www.texim-europe.com



Distributed by:



CSF - CSM

Functional characteristics


Dimensional class:

low


Standard colour:

green


Dimensions:

14 x 11.5 mm (.551 x .453 in)


Max approved wire size:
solid: 2.5 mm² (IMQ); 14 AWG (UL)stranded: 1.5 mm² (IMQ); 14 AWG (UL)
Clamp opening size:

2.5 x 2 mm (.098 x .079 in)


Versions:
side stackable, modular,
locking screw flanges
Single mould poles:



from 2 to 25 (modular and side stackable)

from 2 to 23 (locking screw flanges)


Pitches:

metric 5 mm, 10 mm

(.197 in, .394 in)

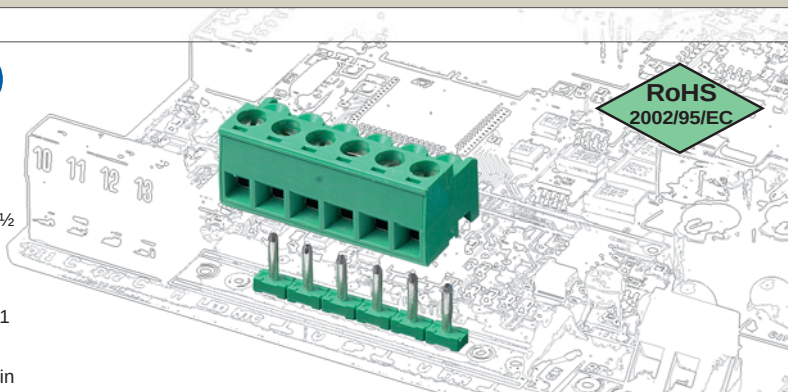

pitch 5 mm
from 2 to 25 poles
side stackable
90° version



pitch 5 mm
from 2 to 25 poles
side stackable
straight version



pitch 5 mm
from 2 to 25 poles
side stackable
straight version



pitch 5 mm
from 2 to 25 poles
side stackable
90° - 270° version



pitch 5 mm
from 2 to 25 poles
side stackable
90° - 270° version



pitch 5 mm
from 2 to 25 poles
with hook
90° - 270° version



pitch 5 mm
from 2 to 23 poles
locking screw flange
90° - 270° version



from 2 to 9 poles
BSC for rising clamp



COF-SP1
coding splines

Brief description

CSF__01_: Specific for Dritta insertion (industrial use).

The contact spring in this CSF version has been purposely studied for Dritta insertions therefore guaranteeing Alta reliability of the electrical contact even after much use. Direction of insertion of the CSM male connector is one direction only. See diagram at page 137.

CSF__09_: Specific for 90° e 270° insertion (industrial use).

The contact spring in this CSF version has been purposely studied for 90° e 270° insertion therefore guaranteeing Alta reliability of the electrical contact even after much use. Direction of insertion of the CSM male connection is two directions. See diagram at page 137.

CSF__00_: Non- specific, 90° e 270° Dritta insertion (flexible use of for pre-series).

The contact spring in this CSF version has been purposely studied for maximum flexibility of use which permits insertion of the CSM male connector in 3 directions. See diagram at page 137. Its versatility permits a reduction in stock, regardless of its specific use. On the other hand, the geometry of the contact spring means that this product must be used with care. In order that the connection between CSF e CSM is correct, it is necessary a solder the CSM male connector making sure that the terminals are parallel. We recommend utilizing the CSF products for industrial use.

Please see page 18 – 19 for polarization of the CS connector series.

CSF__0J_: Specific for 90° e 270° insertion (industrial use)

The contact spring in this CSF series has been purposely studied for 90° e 270° insertion e therefore guarantees maximum reliability of the electrical contact even after much use. Direction of insertion of the CSM male connector is in two directions.

CSF__0S_: Specific for 90° e 270° insertion (industrial use).

The contact spring in this CSF series has been purposely studied for 90° e 270° insertion e therefore guarantees high reliability of the electrical contact even after much use. Direction of insertion of the CSM male connector is in two directions. The hooks make it possible a secure the product onto the bottom of the box, in this way meeting the safety requirements which state that it is necessary that the voltage is interrupted when the lid, on the board where the corresponding male (CSM) is soldered, is removed. Moreover it is possible a change the number of the poli of the connector without having a change the box.


CSF__0F: Specific for 90° e 270° insertion (industrial use).

The contact spring in this CSF version has been purposely studied for 90° e 270° insertion e therefore guarantees Alta reliability of the electrical contact even after much use. Direction of insertion of the CSM male connector is in two directions. The screws make it possible a meet in a different way, the same safety requirements mentioned above can the CSF__0S_ products,. Moreover, this solution means that a sealed box can be used.

The Verde or black CSM can be soldered in SMD ovens up a 270°.

Characteristics of components

- M3 nickel plated copper alloy screw.
- Nickel-plated copper alloy rising clamp.
- PA 6.6 polyamide housing.
Standard colour: GREEN.
V0 self-extinguishing according to UL 94.
Chlorinated solvents resistant,
with no phosphor, dioxin or
detrimental to health halogens.
- Leadfree tin-plated copper alloy spring.
- Easy to solder lead-free
tin-plated copper alloy pin.

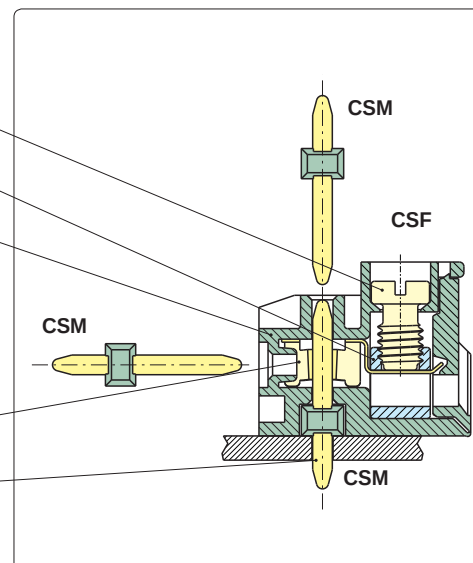

Mechanical characteristics

Insertion force per pole	max 2 N (max .450 lbf)
Withdrawal force per pole	min 1,2 N (min .270 lbf)
Recommended/highest tightening torque	0.5/0.6 Nm (4.42/5.30 lbf*in)
PCB thickness	max 2.4 mm (.094 in)
PCB hole diameter	min 1.4 mm (.055 in)
Stripping length	4 ÷ 6 mm (.16 ÷ .24 in)
Operating temperature range	-40 °C ÷ +110 °C (-40 °F ÷ +230 °F)
Climatic category	40/110/21 According to EN 60068-1

Electric characteristics*


Solid wire section	0.05 mm ² ÷ 2,5 mm ² (IMQ)* 30÷14 AWG (UL)*
Stranded wire section	0.05 mm ² ÷ 2,5 mm ² (IMQ)* 30÷14 AWG (UL)*
Rated voltage for 5 mm (.197 in) pitch	320 V (IMQ)*
Rated voltage for 10 mm (.394 in) pitch	800 V (IMQ)*
Rated current	15 A (IMQ)*
Contact resistance	<15 mΩ
Insulation resistance	>10 ⁹ Ω (500V DC)

*All the a.m. data refer to the highest values amongst the certificated ones.


V voltage, I current values and tightening torque are related to the norms to be applied to the product and to its use.

Approvals


IEC:	for 5 mm pitch:	200 V - 15 A - 2.5 mm ² - T110 - 4kV - 3 / 320 V - 15 A - 2.5 mm ² - T110 - 4kV - 2
EN 61984	for 10 mm pitch:	500 V - 15 A - 2.5 mm ² - T110 - 8kV - 3 / 800 V - 15 A - 2.5 mm ² - T110 - 8kV - 2
UL:	300 V - 12 A - 30÷14 AWG - 6 lbf-in for 5 mm pitch (10A for "9", "0", "J", "S" and "F" versions)	
File E167473	600 V - 12 A - 30÷14 AWG - 6 lbf-in for 10 mm pitch (10A for "9", "0", "J", "S" and "F" versions)	
	Application values for end-use equipment have to be in accordance to UL norms and applicable to it.	
VDE:	for 5 mm pitch:	250 V - 12 A - 1.5 mm ² - T110 - 2,5kV - 2 (10A - T95 for "9", "0", "J", "S" and "F" versions)
File n. 40013401	for 10 mm pitch:	750 V - 12 A - 1.5 mm ² - T110 - 2,5kV - 2 (10A - T95 for "9", "0", "J", "S" and "F" versions)
IMQ:	for 5 mm pitch:	200 V - 15 A - 2.5 mm ² - T110 - 4kV - 3 / 320 V - 15 A - 2.5 mm ² - T110 - 4kV - 2
File n. EE099	for 10 mm pitch:	500 V - 15 A - 2.5 mm ² - T110 - 8kV - 3 / 800 V - 15 A - 2.5 mm ² - T110 - 8kV - 2

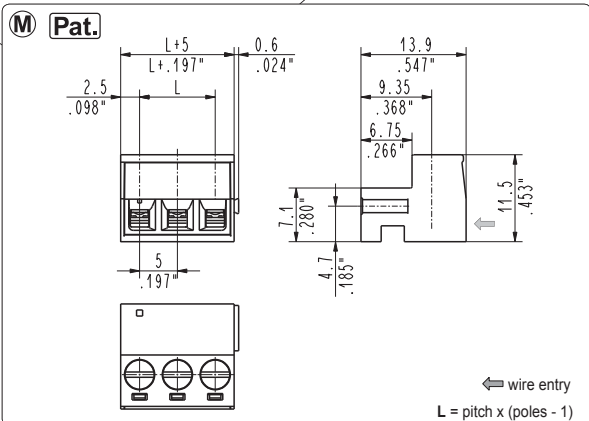
CSF_0M1 straight, modular female


5 mm / .197" pitch					
Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	CSF020M1	450	1,08	2500	6,00
03	CSF030M1	300	1,08	1750	6,30
04	CSF040M1	225	1,08	1500	7,20
05	CSF050M1	175	1,05	1000	6,00
06	CSF060M1	150	1,08	750	5,40
07	CSF070M1	125	1,05	750	6,30
08	CSF080M1	100	0,96	500	4,80
09	CSF090M1	100	1,08	500	5,40
10	CSF100M1	75	0,90	500	6,00
11	CSF110M1	75	0,99	500	6,60
12	CSF120M1	75	1,08	500	7,20
13	CSF130M1	50	0,78	500	7,80
14	CSF140M1	50	0,84	250	4,20
15	CSF150M1	50	0,90	250	4,50
16	CSF160M1	50	0,96	250	4,80
17	CSF170M1	50	1,02	250	5,10
18	CSF180M1	50	1,08	250	5,40
19	CSF190M1	50	1,14	250	5,70
20	CSF200M1	50	1,20	250	6,00
21	CSF210M1	50	1,26	250	6,30
22	CSF220M1	50	1,32	250	6,60
23	CSF230M1	50	1,38	250	6,90
24	CSF240M1	50	1,44	250	7,20
25	CSF250M1	50	1,50	250	7,50

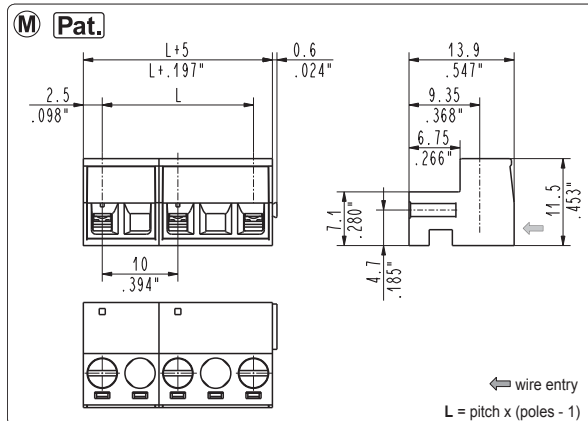
CSF_0M2 straight, modular female

10 mm / .394" pitch					
Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
01	CSF010M2	450	0,68	2500	3,80
02	CSF020M2	300	0,91	1750	5,32
03	CSF030M2	175	0,80	1000	4,56
04	CSF040M2	125	0,76	750	4,56
05	CSF050M2	100	0,76	500	3,80
06	CSF060M2	75	0,68	500	4,56
07	CSF070M2	50	0,53	250	2,66
08	CSF080M2	50	0,61	250	3,04
09	CSF090M2	50	0,68	250	3,42
10	CSF100M2	50	0,76	250	3,80
11	CSF110M2	50	0,84	250	4,18
12	CSF120M2	50	0,91	250	4,56
13	CSF130M2	50	0,99	250	4,94

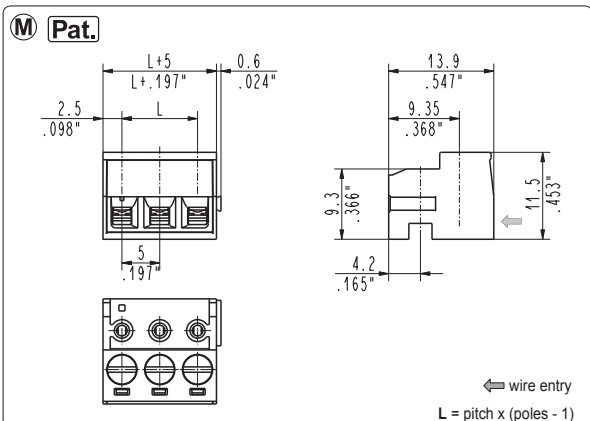
CSF_0W1 90°-270°, modular female

5 mm / .197" pitch					
Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	CSF020W1	450	1,08	2500	6,00
03	CSF030W1	300	1,08	1750	6,30
04	CSF040W1	225	1,08	1500	7,20
05	CSF050W1	175	1,05	1000	6,00
06	CSF060W1	150	1,08	750	5,40
07	CSF070W1	125	1,05	750	6,30
08	CSF080W1	100	0,96	500	4,80
09	CSF090W1	100	1,08	500	5,40
10	CSF100W1	75	0,90	500	6,00
11	CSF110W1	75	0,99	500	6,60
12	CSF120W1	75	1,08	500	7,20
13	CSF130W1	50	0,78	500	7,80
14	CSF140W1	50	0,84	250	4,20
15	CSF150W1	50	0,90	250	4,50
16	CSF160W1	50	0,96	250	4,80
17	CSF170W1	50	1,02	250	5,10
18	CSF180W1	50	1,08	250	5,40
19	CSF190W1	50	1,14	250	5,70
20	CSF200W1	50	1,20	250	6,00
21	CSF210W1	50	1,26	250	6,30
22	CSF220W1	50	1,32	250	6,60
23	CSF230W1	50	1,38	250	6,90
24	CSF240W1	50	1,44	250	7,20
25	CSF250W1	50	1,50	250	7,50

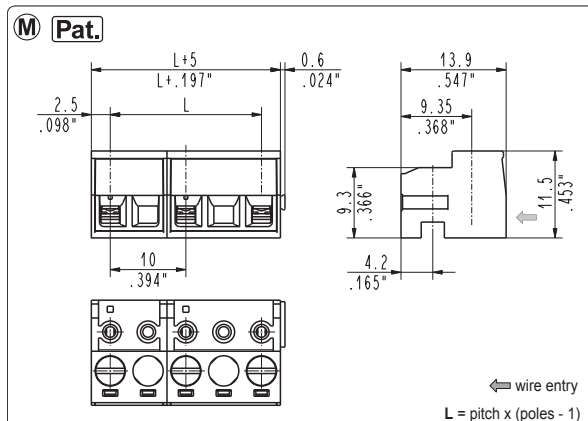
CSF_0W2 90°-270°, modular female


10 mm / .394" pitch					
Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
01	CSF010W2	450	0,68	2500	3,80
02	CSF020W2	300	0,91	1750	5,32
03	CSF030W2	175	0,80	1000	4,56
04	CSF040W2	125	0,76	750	4,56
05	CSF050W2	100	0,76	500	3,80
06	CSF060W2	75	0,68	500	4,56
07	CSF070W2	50	0,53	250	2,66
08	CSF080W2	50	0,61	250	3,04
09	CSF090W2	50	0,68	250	3,42
10	CSF100W2	50	0,76	250	3,80
11	CSF110W2	50	0,84	250	4,18
12	CSF120W2	50	0,91	250	4,56
13	CSF130W2	50	0,99	250	4,94

Distributed by:





(M) Pat.

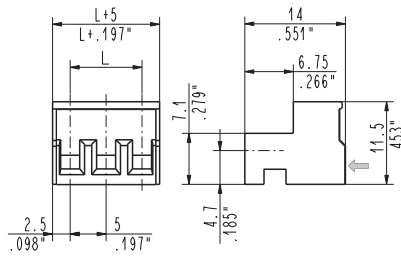

L = pitch x (poles - 1)


CSF_001

straight, modular female

5 mm / .197" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	CSF020M1	450	1,08	2500	6,00
03	CSF030M1	300	1,08	1750	6,30
04	CSF040M1	225	1,08	1500	7,20
05	CSF050M1	175	1,05	1000	6,00
06	CSF060M1	150	1,08	750	5,40
07	CSF070M1	125	1,05	750	6,30
08	CSF080M1	100	0,96	500	4,80
09	CSF090M1	100	1,08	500	5,40
10	CSF100M1	75	0,90	500	6,00
11	CSF110M1	75	0,99	500	6,60
12	CSF120M1	75	1,08	500	7,20
13	CSF130M1	50	0,78	500	7,80
14	CSF140M1	50	0,84	250	4,20
15	CSF150M1	50	0,90	250	4,50
16	CSF160M1	50	0,96	250	4,80
17	CSF170M1	50	1,02	250	5,10
18	CSF180M1	50	1,08	250	5,40
19	CSF190M1	50	1,14	250	5,70
20	CSF200M1	50	1,20	250	6,00
21	CSF210M1	50	1,26	250	6,30
22	CSF220M1	50	1,32	250	6,60
23	CSF230M1	50	1,38	250	6,90
24	CSF240M1	50	1,44	250	7,20
25	CSF250M1	50	1,50	250	7,50

(M) Pat.

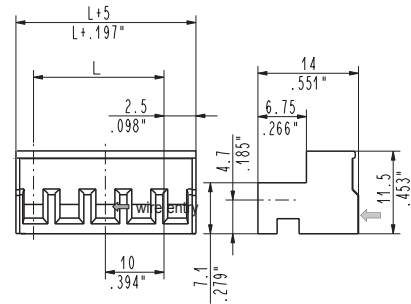

⇐ wire entry


L = pitch x (poles - 1)

CSF_002

straight, modular female

10 mm / .394" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
01	CSF010M2	300	0,68	2500	3,80
02	CSF020M2	300	0,91	1750	5,32
03	CSF030M2	175	0,80	1000	4,56
04	CSF040M2	125	0,76	750	4,56
05	CSF050M2	100	0,76	500	3,80
06	CSF060M2	75	0,68	500	4,56
07	CSF070M2	50	0,53	250	2,66
08	CSF080M2	50	0,61	250	3,04
09	CSF090M2	50	0,68	250	3,42
10	CSF100M2	50	0,76	250	3,80
11	CSF110M2	50	0,84	250	4,18
12	CSF120M2	50	0,91	250	4,56
13	CSF130M2	50	0,99	250	4,94

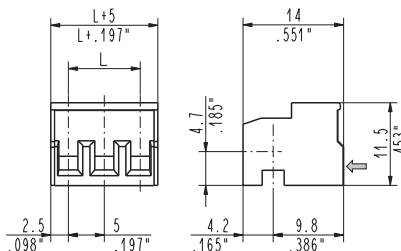

⇐ wire entry


L = pitch x (poles - 1)

CSF_001

straight - 90° - 270°, female

5 mm / .197" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	CSF02001	450	1,09	2500	6,05
03	CSF03001	300	1,09	1750	6,35
04	CSF04001	225	1,09	1500	7,26
05	CSF05001	175	1,06	1000	6,05
06	CSF06001	150	1,09	750	5,45
07	CSF07001	125	1,06	750	6,35
08	CSF08001	100	0,97	500	4,84
09	CSF09001	100	1,09	500	5,45
10	CSF10001	75	0,91	500	6,05
11	CSF11001	75	1,00	500	6,66
12	CSF12001	75	1,09	500	7,26
13	CSF13001	50	0,79	500	7,87
14	CSF14001	50	0,85	250	4,24
15	CSF15001	50	0,91	250	4,54
16	CSF16001	50	0,97	250	4,84
17	CSF17001	50	1,03	250	5,14
18	CSF18001	50	1,09	250	5,45
19	CSF19001	50	1,15	250	5,75
20	CSF20001	50	1,21	250	6,05
21	CSF21001	50	1,27	250	6,35
22	CSF22001	50	1,33	250	6,66
23	CSF23001	50	1,39	250	6,96
24	CSF24001	50	1,45	250	7,26
25	CSF25001	50	1,51	250	7,56

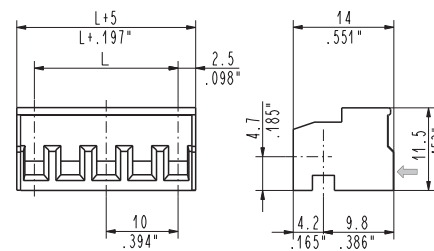

⇐ wire entry

L = pitch x (poles - 1)

CSF_002


straight - 90° - 270°, female

10 mm / .394" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	CSF02002	300	0,92	1750	5,36
03	CSF03002	175	0,80	1000	4,59
04	CSF04002	125	0,77	750	4,59
05	CSF05002	100	0,77	500	3,83
06	CSF06002	75	0,69	500	4,59
07	CSF07002	50	0,54	250	2,68
08	CSF08002	50	0,61	250	3,06
09	CSF09002	50	0,69	250	3,44
10	CSF10002	50	0,77	250	3,83
11	CSF11002	50	0,84	250	4,21
12	CSF12002	50	0,92	250	4,59
13	CSF13002	50	0,99	250	4,97

Distributed by:



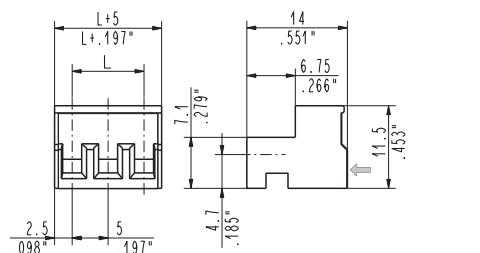


⇐ wire entry
L = pitch x (poles - 1)

CSF_011 straight, female

5 mm / .197" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	CSF02011	450	1,09	2500	6,05
03	CSF03011	300	1,09	1750	6,35
04	CSF04011	225	1,09	1500	7,26
05	CSF05011	175	1,06	1000	6,05
06	CSF06011	150	1,09	750	5,45
07	CSF07011	125	1,06	750	6,35
08	CSF08011	100	0,97	500	4,84
09	CSF09011	100	1,09	500	5,45
10	CSF10011	75	0,91	500	6,05
11	CSF11011	75	1,00	500	6,66
12	CSF12011	75	1,09	500	7,26
13	CSF13011	50	0,79	500	7,87
14	CSF14011	50	0,85	250	4,24
15	CSF15011	50	0,91	250	4,54
16	CSF16011	50	0,97	250	4,84
17	CSF17011	50	1,03	250	5,14
18	CSF18011	50	1,09	250	5,45
19	CSF19011	50	1,15	250	5,75
20	CSF20011	50	1,21	250	6,05
21	CSF21011	50	1,27	250	6,35
22	CSF22011	50	1,33	250	6,66
23	CSF23011	50	1,39	250	6,96
24	CSF24011	50	1,45	250	7,26
25	CSF25011	50	1,51	250	7,56

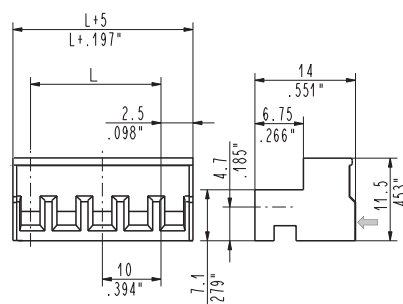


⇐ wire entry
L = pitch x (poles - 1)

CSF_012 straight, female

10 mm / .394" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	CSF02012	300	0,92	1750	5,36
03	CSF03012	175	0,80	1000	4,59
04	CSF04012	125	0,77	750	4,59
05	CSF05012	100	0,77	500	3,83
06	CSF06012	75	0,69	500	4,59
07	CSF07012	50	0,54	250	2,68
08	CSF08012	50	0,61	250	3,06
09	CSF09012	50	0,69	250	3,44
10	CSF10012	50	0,77	250	3,83
11	CSF11012	50	0,84	250	4,21
12	CSF12012	50	0,92	250	4,59
13	CSF13012	50	0,99	250	4,97

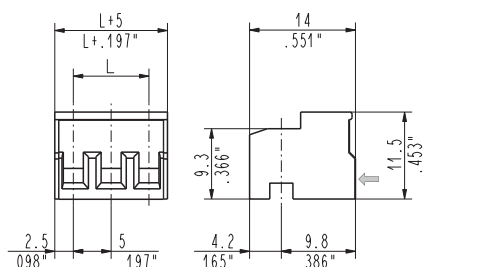


⇐ wire entry
L = pitch x (poles - 1)

CSF_091 90° - 270°, female

5 mm / .197" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	CSF02091	450	1,09	2500	6,05
03	CSF03091	300	1,09	1750	6,35
04	CSF04091	225	1,09	1500	7,26
05	CSF05091	175	1,06	1000	6,05
06	CSF06091	150	1,09	750	5,45
07	CSF07091	125	1,06	750	6,35
08	CSF08091	100	0,97	500	4,84
09	CSF09091	100	1,09	500	5,45
10	CSF10091	75	0,91	500	6,05
11	CSF11091	75	1,00	500	6,66
12	CSF12091	75	1,09	500	7,26
13	CSF13091	50	0,79	500	7,87
14	CSF14091	50	0,85	250	4,24
15	CSF15091	50	0,91	250	4,54
16	CSF16091	50	0,97	250	4,84
17	CSF17091	50	1,03	250	5,14
18	CSF18091	50	1,09	250	5,45
19	CSF19091	50	1,15	250	5,75
20	CSF20091	50	1,21	250	6,05
21	CSF21091	50	1,27	250	6,35
22	CSF22091	50	1,33	250	6,66
23	CSF23091	50	1,39	250	6,96
24	CSF24091	50	1,45	250	7,26
25	CSF25091	50	1,51	250	7,56

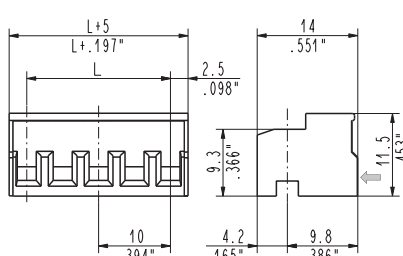

⇐ wire entry
L = pitch x (poles - 1)

CSF_092 90° - 270°, female


10 mm / .394" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	CSF02092	300	0,92	1750	5,36
03	CSF03092	175	0,80	1000	4,59
04	CSF04092	125	0,77	750	4,59
05	CSF05092	100	0,77	500	3,83
06	CSF06092	75	0,69	500	4,59
07	CSF07092	50	0,54	250	2,68
08	CSF08092	50	0,61	250	3,06
09	CSF09092	50	0,69	250	3,44
10	CSF10092	50	0,77	250	3,83
11	CSF11092	50	0,84	250	4,21
12	CSF12092	50	0,92	250	4,59
13	CSF13092	50	0,99	250	4,97


Distributed by:




www.texim-europe.com

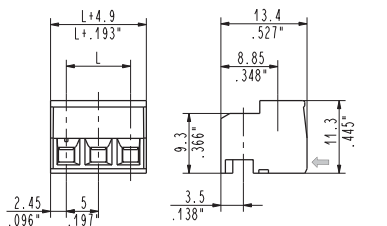

← wire entry
L = pitch x (poles - 1)

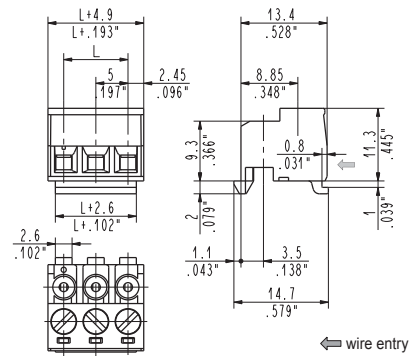

← wire entry
L = pitch x (poles - 1)

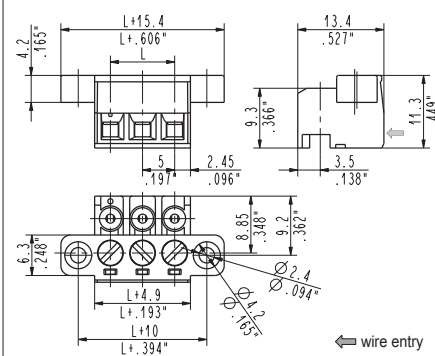

← wire entry
L = pitch x (poles - 1)

CSF_0J1 90°-270°, safe female

5 mm / .197" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	CSF020J1	450	1,08	2500	6,00
03	CSF030J1	300	1,08	1750	6,30
04	CSF040J1	225	1,08	1500	7,20
05	CSF050J1	175	1,05	1000	6,00
06	CSF060J1	150	1,08	750	5,40
07	CSF070J1	125	1,05	750	6,30
08	CSF080J1	100	0,96	500	4,80
09	CSF090J1	100	1,08	500	5,40
10	CSF100J1	75	0,90	500	6,00
11	CSF110J1	75	0,99	500	6,60
12	CSF120J1	75	1,08	500	7,20
13	CSF130J1	50	0,78	500	7,80
14	CSF140J1	50	0,84	250	4,20
15	CSF150J1	50	0,90	250	4,50
16	CSF160J1	50	0,96	250	4,80
17	CSF170J1	50	1,02	250	5,10
18	CSF180J1	50	1,08	250	5,40
19	CSF190J1	50	1,14	250	5,70
20	CSF200J1	50	1,20	250	6,00
21	CSF210J1	50	1,26	250	6,30
22	CSF220J1	50	1,32	250	6,60
23	CSF230J1	50	1,38	250	6,90
24	CSF240J1	50	1,44	250	7,20
25	CSF250J1	50	1,50	250	7,50

CSF_0S1 90°-270°, female with snap features


5 mm / .197" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	CSF020S1	450	1,01	2500	6,10
03	CSF030S1	300	1,01	1750	6,41
04	CSF040S1	225	1,01	1500	7,32
05	CSF050S1	175	1,07	1000	6,10
06	CSF060S1	150	1,01	750	5,49
07	CSF070S1	125	1,07	750	6,41
08	CSF080S1	100	0,98	500	4,88
09	CSF090S1	100	1,01	500	5,49
10	CSF100S1	75	0,92	500	6,10
11	CSF110S1	75	1,01	500	6,71
12	CSF120S1	75	1,01	500	7,32
13	CSF130S1	50	0,79	500	7,93
14	CSF140S1	50	0,85	250	4,27
15	CSF150S1	50	0,92	250	4,58
16	CSF160S1	50	0,98	250	4,88
17	CSF170S1	50	1,04	250	5,19
18	CSF180S1	50	1,01	250	5,49
19	CSF190S1	50	1,16	250	5,80
20	CSF200S1	50	1,22	250	6,10
21	CSF210S1	50	1,28	250	6,41
22	CSF220S1	50	1,34	250	6,71
23	CSF230S1	50	1,40	250	7,02
24	CSF240S1	50	1,46	250	7,32
25	CSF250S1	50	1,53	250	7,63


CSF_0F1 90°-270°, female with high flange

5 mm / .197" pitch


Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	CSF020F1	450	1,44	2500	4,00
03	CSF030F1	300	1,32	1750	4,40
04	CSF040F1	225	1,26	1500	5,60
05	CSF050F1	175	1,19	1000	5,10
06	CSF060F1	150	1,20	750	6,00
07	CSF070F1	125	1,15	750	4,60
08	CSF080F1	100	1,04	500	5,20
09	CSF090F1	100	1,16	500	5,80
10	CSF100F1	75	0,96	500	6,40
11	CSF110F1	75	1,05	500	7,00
12	CSF120F1	75	1,14	500	7,60
13	CSF130F1	50	0,82	250	4,10
14	CSF140F1	50	0,88	250	4,40
15	CSF150F1	50	0,94	250	4,70
16	CSF160F1	50	1,00	250	5,00
17	CSF170F1	50	1,06	250	5,30
18	CSF180F1	50	1,12	250	5,60
19	CSF190F1	50	1,18	250	5,90
20	CSF200F1	50	1,24	250	6,20
21	CSF210F1	50	1,30	250	6,50
22	CSF220F1	50	1,36	250	6,80
23	CSF230F1	50	1,42	250	7,10

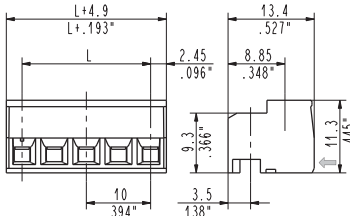

← wire entry
L = pitch x (poles - 1)

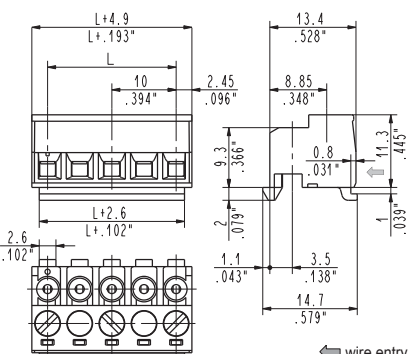

← wire entry
L = pitch x (poles - 1)

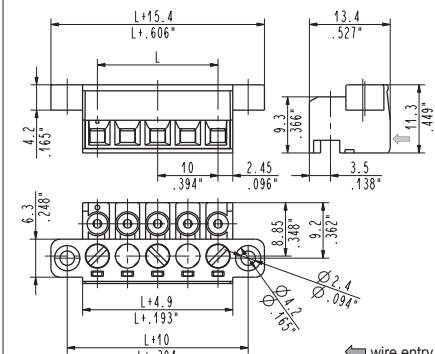

← wire entry
L = pitch x (poles - 1)

CSF_0J2 90°-270°, safe female

10 mm / .394" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	CSF020J2	300	0,91	1750	5,32
03	CSF030J2	175	0,80	1000	4,56
04	CSF040J2	125	0,76	750	4,56
05	CSF050J2	100	0,76	500	3,80
06	CSF060J2	75	0,68	500	4,56
07	CSF070J2	50	0,53	250	2,66
08	CSF080J2	50	0,61	250	3,04
09	CSF090J2	50	0,68	250	3,42
10	CSF100J2	50	0,76	250	3,80
11	CSF110J2	50	0,84	250	4,18
12	CSF120J2	50	0,91	250	4,56
13	CSF130J2	50	0,99	250	4,94

CSF_0S2 90°-270°, female with snap features

10 mm / .394" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	CSF020S2	300	0,94	1750	5,50
03	CSF030S2	175	0,82	1000	4,71
04	CSF040S2	125	0,79	750	4,71
05	CSF050S2	100	0,79	500	3,93
06	CSF060S2	75	0,71	500	4,71
07	CSF070S2	50	0,55	250	2,75
08	CSF080S2	50	0,63	250	3,14
09	CSF090S2	50	0,71	250	3,53
10	CSF100S2	50	0,79	250	3,93
11	CSF110S2	50	0,86	250	4,32
12	CSF120S2	50	0,94	250	4,71
13	CSF130S2	50	1,02	250	5,10

CSF_0F2 90°-270°, female with high flange

10 mm / .394" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	CSF020F2	300	1,15	1750	6,72
03	CSF030F2	175	0,94	1000	5,36
04	CSF040F2	225	0,86	750	5,16
05	CSF050F2	10	0,84	500	4,20
06	CSF060F2	75	0,74	500	4,96
07	CSF070F2	50	0,57	250	2,86
08	CSF080F2	50	0,65	250	3,24
09	CSF090F2	50	0,72	250	3,62
10	CSF100F2	50	0,80	250	4,00
11	CSF110F2	50	0,88	250	4,38
12	CSF120F2	50	0,95	250	4,76

Distributed by:





GREEN ELECTRONICS



CSM

Terminal Blocks and Connectors for Printed Circuit Boards



ISO
9001



ISO
14001



BS OHSAS
18001:2007




Sauro®
ELECTRONIC CONNECTORS

Distributed by:



www.texim-europe.com

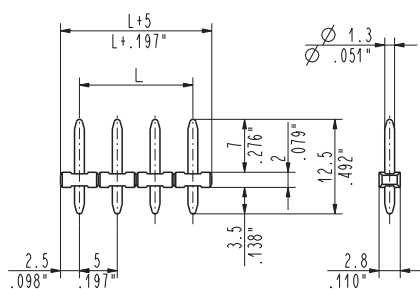


L = pitch x (poles - 1)

CSM_0A1**straight, side stackable male**

5 mm / .197" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	CSM020A1	450	0,15	2500	0,85
03	CSM030A1	300	0,15	1750	0,89
04	CSM040A1	225	0,15	1500	1,02
05	CSM050A1	175	0,15	1000	0,85
06	CSM060A1	150	0,15	1500	1,53
07	CSM070A1	125	0,15	750	0,89
08	CSM080A1	100	0,14	500	0,68
09	CSM090A1	100	0,15	500	0,77
10	CSM100A1	75	0,13	500	0,85
11	CSM110A1	75	0,14	500	0,94
12	CSM120A1	75	0,15	500	1,02
13	CSM130A1	50	0,11	250	0,55
14	CSM140A1	50	0,12	250	0,60
15	CSM150A1	50	0,13	250	0,64
16	CSM160A1	50	0,14	250	0,68
17	CSM170A1	50	0,14	250	0,72
18	CSM180A1	50	0,15	250	0,77
19	CSM190A1	50	0,16	250	0,81
20	CSM200A1	50	0,17	250	0,85
21	CSM210A1	50	0,18	250	0,89
22	CSM220A1	50	0,19	250	0,94
23	CSM230A1	50	0,20	250	0,98
24	CSM240A1	50	0,20	250	1,02
25	CSM250A1	50	0,21	500	2,13

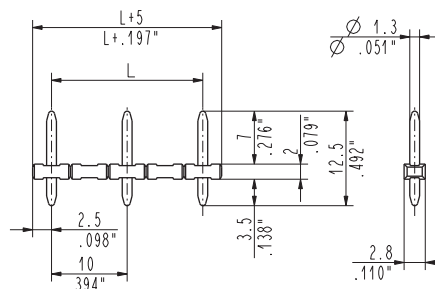


L = pitch x (poles - 1)

CSM_0A2**straight, side stackable male**

10 mm / .394" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	CSM020A2	300	0,11	1750	0,63
03	CSM030A2	175	0,09	1000	0,54
04	CSM040A2	125	0,09	750	0,54
05	CSM050A2	100	0,09	500	0,45
06	CSM060A2	75	0,08	500	0,54
07	CSM070A2	50	0,06	250	0,32
08	CSM080A2	50	0,07	250	0,36
09	CSM090A2	50	0,08	250	0,41
10	CSM100A2	50	0,09	250	0,45
11	CSM110A2	50	0,01	250	0,50
12	CSM120A2	50	0,11	250	0,54
13	CSM130A2	50	0,12	250	0,59

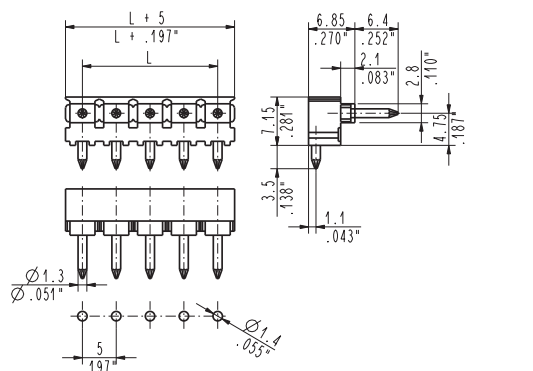


L = pitch x (poles - 1)

CSM_9A1**90°, side stackable male**

5 mm / .197" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	CSM029A1	450	0,36	2500	2,00
03	CSM039A1	300	0,36	1750	2,10
04	CSM049A1	225	0,36	1500	2,40
05	CSM059A1	175	0,36	1000	2,00
06	CSM069A1	150	0,36	1500	3,60
07	CSM079A1	125	0,36	750	2,10
08	CSM089A1	100	0,32	500	1,60
09	CSM099A1	100	0,36	500	1,80
10	CSM109A1	75	0,30	500	2,00
11	CSM119A1	75	0,34	500	2,20
12	CSM129A1	75	0,36	500	2,40
13	CSM139A1	50	0,26	250	1,30
14	CSM149A1	50	0,28	250	1,40
15	CSM159A1	50	0,30	250	1,50
16	CSM169A1	50	0,32	250	1,60
17	CSM179A1	50	0,34	250	1,70
18	CSM189A1	50	0,36	250	1,80
19	CSM199A1	50	0,38	250	1,90
20	CSM209A1	50	0,40	250	2,00
21	CSM219A1	50	0,42	250	2,10
22	CSM229A1	50	0,44	250	2,20
23	CSM239A1	50	0,46	250	2,30
24	CSM249A1	50	0,48	250	2,40
25	CSM259A1	50	0,50	500	5,00

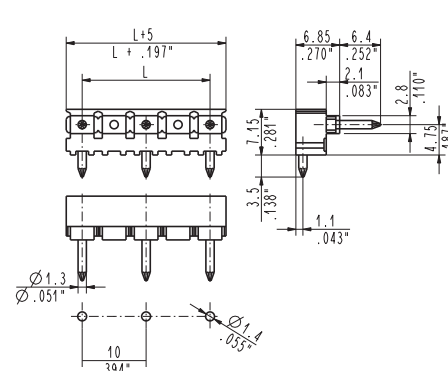

L = pitch x (poles - 1)

CSM_9A2**90°, side stackable male**

10 mm / .394" pitch


Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	CSM029A2	300	0,30	1750	1,70
03	CSM039A2	175	0,25	1000	1,44
04	CSM049A2	125	0,25	750	1,44
05	CSM059A2	100	0,25	500	1,21
06	CSM069A2	75	0,20	500	1,44
07	CSM079A2	50	0,16	250	0,85
08	CSM089A2	50	0,18	250	0,97
09	CSM099A2	50	0,21	250	1,08
10	CSM109A2	50	0,25	250	1,21
11	CSM119A2	50	0,27	250	1,33
12	CSM129A2	50	0,30	250	1,44
13	CSM139A2	50	0,32	250	1,56


Distributed by:




www.texim-europe.com

CSF__01_

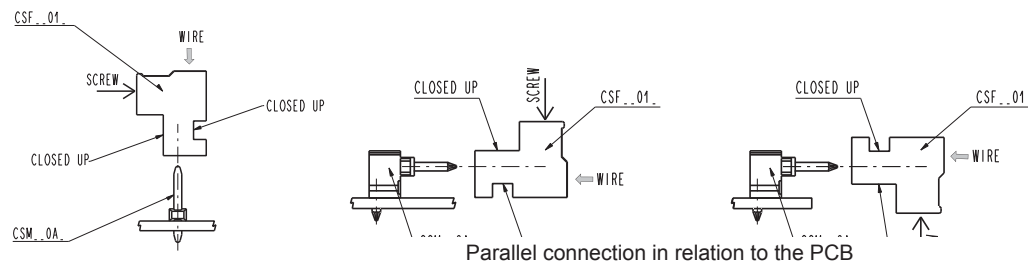Industrial Use
 Specific for the
 Straight Insertion

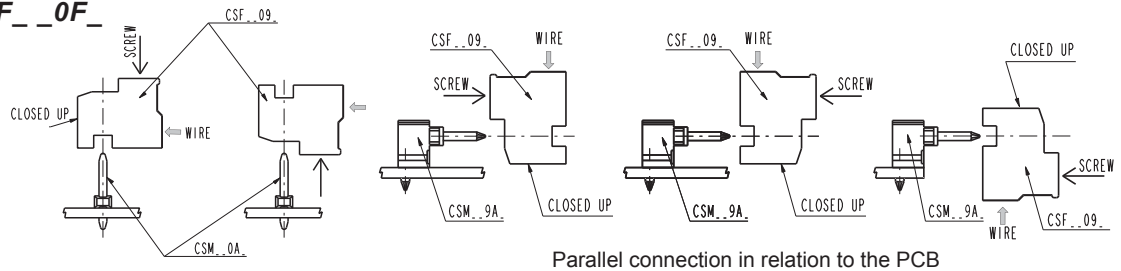 CSF__09_ ; CSF__0J_
 CSF__0S_ ; CSF__0F_

Industrial Use
 Specific for the 90°
 and 270° Insertion

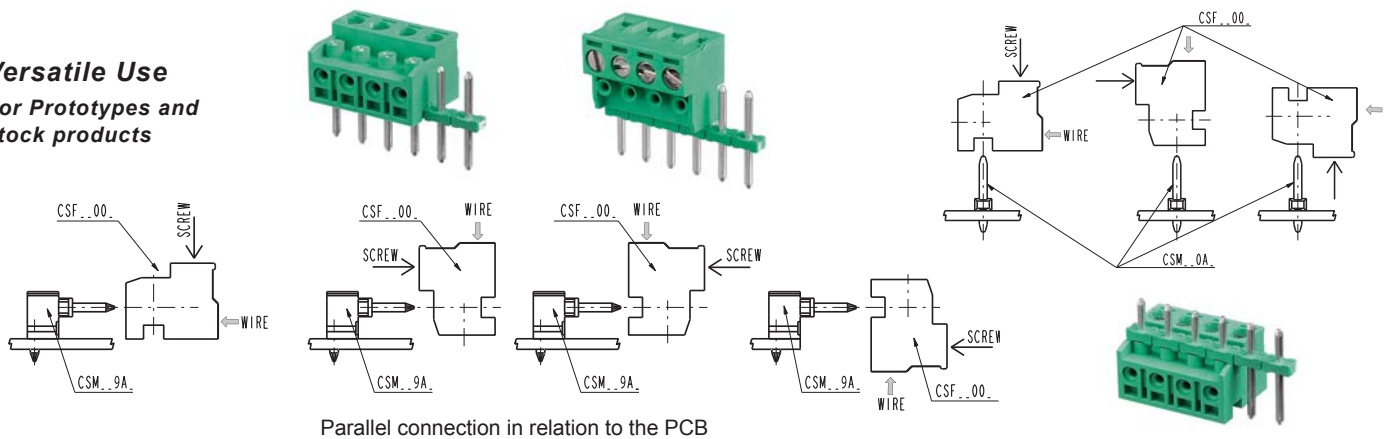
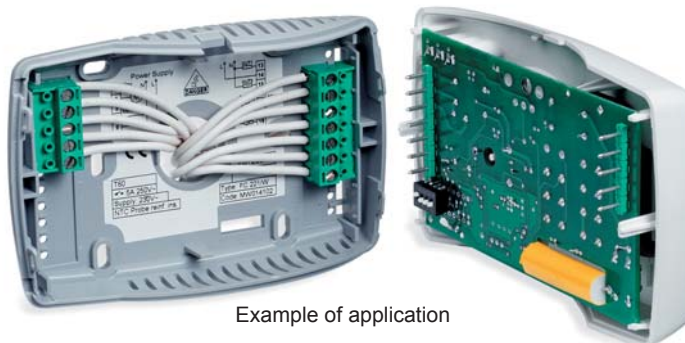
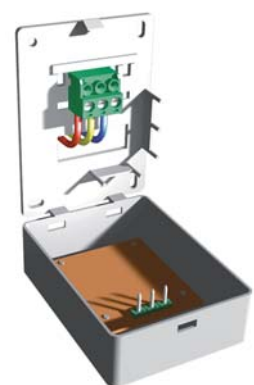
CSF__00_

Versatile Use
 For Prototypes and
 stock products
**Locking type**

Mechanical Blocking with screws



Snap Blocking and/or Bayonet



Example of application

Distributed by:



TEXIM EUROPE

Partner in Electronic Components & Supply Chain Solutions



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen
Tel: +31 (0)53 573 33 33
Fax: +31 (0)53 573 33 30
nl@texim-europe.com



Denmark

Nørregade 15
DK-9240 Nibe
Tel: +45 88 20 26 30
Fax: +45 88 20 26 39
nordic@texim-europe.com



Belgium

Gentsesteenweg 1154-C22
Chaussée de Gand 1154-C22
B-1082 Brussel / Bruxelles
Tel: +32 (0)2 462 01 00
Fax: +32 (0)2 462 01 25
belgium@texim-europe.com



United Kingdom

St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS
Tel: +44 (0)1522 789 555
Fax: +44 (0)845 299 22 26
uk@texim-europe.com



Germany

Justus-von-Liebig-Ring 7-9
D-25451 Quickborn
Tel: +49 (0)4106 627 07-0
Fax: +49 (0)4106 627 07-20
germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München
Tel: +49 (0)89 436 086-0
Fax: +49 (0)89 436 086-19
germany@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg
Tel: +43 (0)662 216026
Fax: +43 (0)662 216026-66
austria@texim-europe.com

Texim Europe B.V.

Elektrostraat 17
NL-7483 PG Haaksbergen
Tel: +31 (0)53 573 33 33
info@texim-europe.com
www.texim-europe.com

