



GREEN ELECTRONICS



MCQ

Terminal Blocks



ISO
9001



ISO
14001



BS OHSAS
18001:2007



Sauro[®]
ELECTRONIC CONNECTORS
—by the law—

Distributed by:



www.texim-europe.com

Functional characteristics

Dimensional class:
high



Standard colour:
green



Height:
17.48 mm (.688 in)



Max approved wire sections:
solid: 2.5 mm² (IEC EN); 12 AWG
stranded: 2.5 mm² (IEC EN); 12 AWG

Wire opening size:
2.3 x 2.9 mm (.091 x .114 in)




Versions:
Side stackable
Single mould poles:
from 2 to 18



Pitches:
metric 5 mm, 10 mm
(.197 in, .394 in)



imperial 5.08 mm, 10.16 mm
(.200 in, .400 in)



pitch 5/5.08 mm
from 2 to 18 poles
90°, side stackable



pitch 5/5.08 mm
from 2 to 18 poles
straight, side stackable

Pat.



Bridge for spring connections
BSC_0C0-0R
from 2 to 6 poles



pitch 10/10.16 mm
from 2 to 9 poles
90°, side stackable

Brief description

The **MCQ** series of terminal blocks for PCBs is the ideal solution when, due to the layout of the PCB, it is necessary to have a **terminal block where the direction of the wire, when inserted, must be parallel to the direction of the tightening command**, maintaining a tightening force which is equal to the rising clamp.

Moreover, by using a contact spring system, wire connections can be **achieved quickly and they are not affected by vibrations**. It is possible to use rigid or flexible wires with ferrules, or without ferrules by pressing on the appropriate switch.

It is available in metric pitches of 5 mm (.197 in) and 10 mm (.394 in)

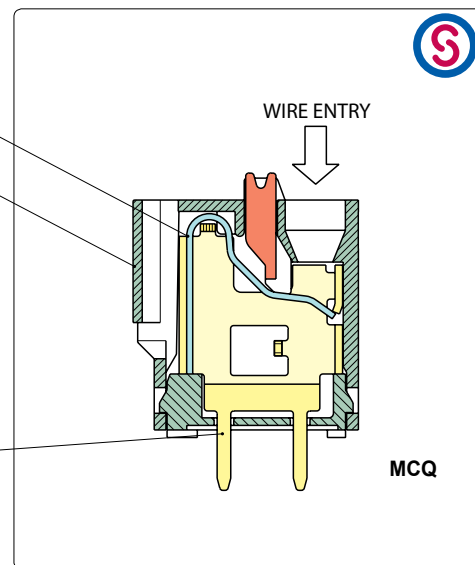
and in imperial pitches of 5.08 mm (.200 in) and 10.16 mm (.400 in), in monolithic blocks from 2 to 18 poles.

All housings are stackable, so it is possible to stack monolithic terminal blocks from 2 to 18 poles until any number of poles is obtained without losing pitch. By taking advantage of this particular feature a minimum quantity of basic terminal blocks can be stored.

It is simple to manage products, warehouse and assembly in Kit packages because several versions can be obtained with only one code, both the part-numbers and the risk of making mistakes are significantly reduced.

Components features

- Steel slapping spring
- PA 6.6 polyamide housing
Standard colour: green
V0 Self-extinguishing according to UL 94.
Chlorinated solvents resistant,
with no phosphor, dioxin or
detrimental to health halogens.
- Easy to solder lead-free
tin-plated copper alloy pin.



Mechanical features

PCB thickness:	max. 2.4 mm (.094 in)
PCB hole diameter:	min. 1.4 mm (.055 in)
Stripping length	10 mm (.39 in)
Operating temperature range	-40 °C ÷ +110 °C (-40 °F ÷ +230 °F)
Climatic category	40/110/21 according to EN 60068-1

Electrical features*

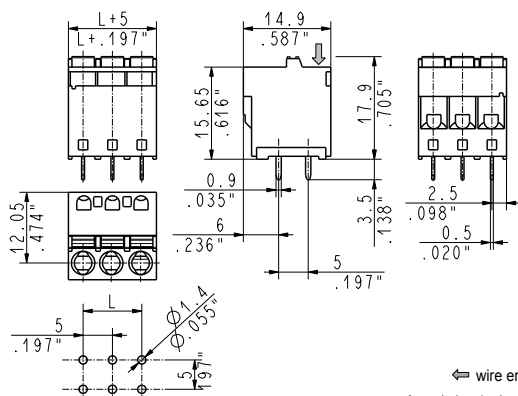
Solid wire section	30÷12 AWG; 0.2 ÷ 2.5 mm ² (IEC EN)*
Stranded wire section	30÷12 AWG (UL)*; 0.2 ÷ 2.5 mm ² (IEC EN)*
Rated voltage for 5 mm (.197 in) and 5.08 mm (.200 in)	300 V (UL)*
Rated voltage for 10 mm (.394 in) and 10.16 mm (.400 in)	750 V (IEC EN)*
Rated current	12 A (UL)*
Contact resistance	<15 mΩ
Insulation resistance	>10 ⁹ Ω (500V DC)

*All the above mentioned data refer to the highest values amongst the certified ones.

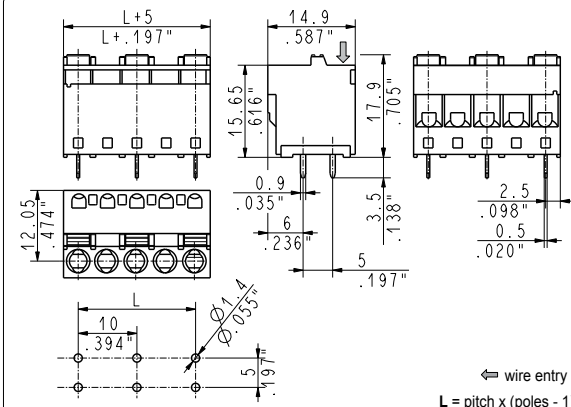
V voltage, I current values and tightening torque are related to the norms to be applied to the product and to its use.

Approvals

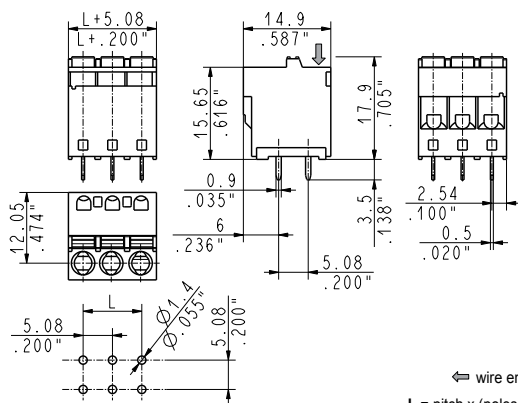
IEC-EN	IEC:	250 V - T 110 - 12 A - 2.5 mm ² solid and stranded for 5 mm and 5.08 mm pitch
	EN 60998	750 V - T 110 - 12 A - 2.5 mm ² solid and stranded for 10 mm and 10.16 mm pitch
UL	UL:	300 V - 12 A - 30÷12 AWG stranded for 5 mm, 5.08 mm pitch
	File E167473	600 V - 12 A - 30÷12 AWG stranded for 10 mm and 10.16 mm pitch
		Application values for end-use equipment have to be in accordance to UL norms and applicable to them.

**MCQ_001****90°, side stackable****5 mm / .197" pitch**

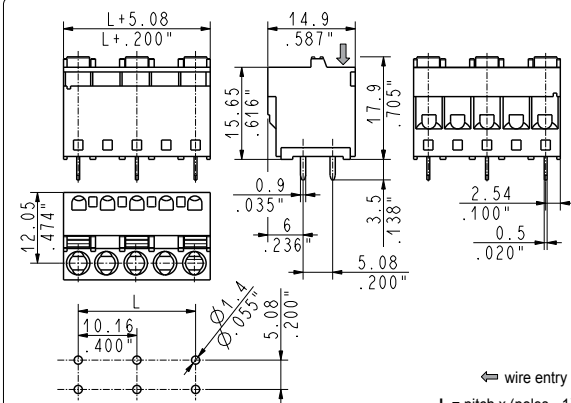
Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	MCQ02001	300	0,90	1250	3,75
03	MCQ03001	200	0,90	1000	4,50
04	MCQ04001	200	1,20	1000	6,00
05	MCQ05001	200	1,50	1000	7,50
06	MCQ06001	150	1,35	1000	9,00
07	MCQ07001	125	1,31	750	7,88
08	MCQ08001	100	1,20	500	6,00
09	MCQ09001	100	1,35	500	6,75
10	MCQ10001	50	0,75	250	3,75
11	MCQ11001	50	0,83	250	4,13
12	MCQ12001	50	0,90	250	4,50
13	MCQ13001	50	0,98	250	4,88
14	MCQ14001	50	1,05	250	5,25
15	MCQ15001	50	1,13	250	5,63
16	MCQ16001	50	1,20	250	6,00
17	MCQ17001	50	1,28	250	6,38
18	MCQ18001	50	1,35	250	6,75

**MCQ_002****90°, side stackable****10 mm / .394" pitch**

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	MCQ02002	300	1,13	1250	4,70
03	MCQ03002	200	1,13	1000	5,64
04	MCQ04002	125	0,94	750	5,64
05	MCQ05002	100	0,94	500	4,70
06	MCQ06002	50	0,56	250	2,82
07	MCQ07002	50	0,66	250	3,29
08	MCQ08002	50	0,75	250	3,76
09	MCQ09002	50	0,85	250	4,23

**MCQ_005****90°, side stackable****5.08 mm / .200" pitch**

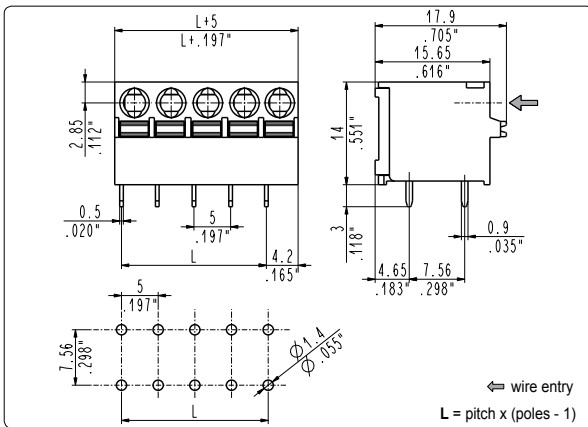
Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	MCQ02005	300	0,90	1250	3,75
03	MCQ03005	200	0,90	1000	4,50
04	MCQ04005	200	1,20	1000	6,00
05	MCQ05005	200	1,50	1000	7,50
06	MCQ06005	150	1,35	1000	9,00
07	MCQ07005	125	1,31	750	7,88
08	MCQ08005	100	1,20	500	6,00

**MCQ_006****90°, side stackable****10.16 mm / .400" pitch**

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	MCQ02006	300	1,13	1250	4,70
03	MCQ03006	200	1,13	1000	5,64
04	MCQ04006	125	0,94	750	5,64

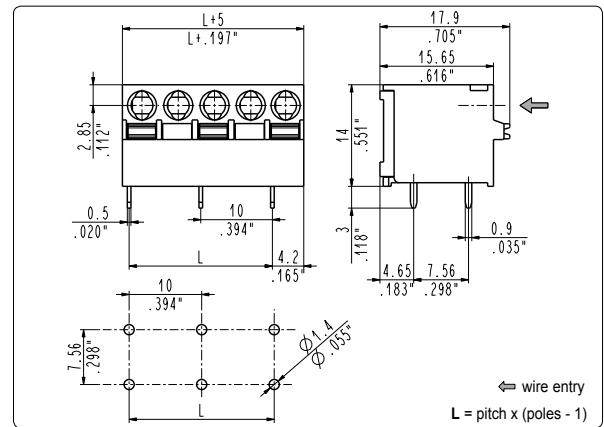
Distributed by:



**MCQ_091** straight, side stackable

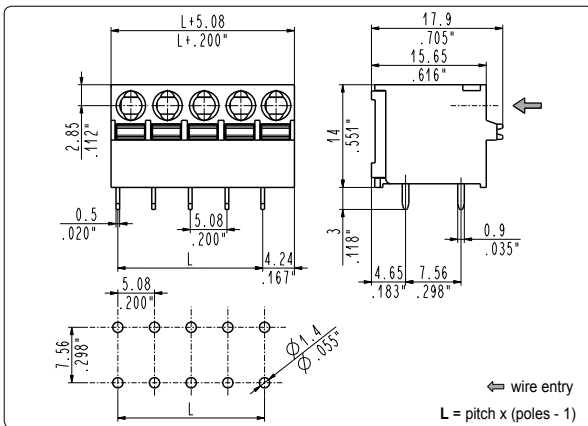
5 mm / .197" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	MCQ02091	300	0,78	1250	3,25
03	MCQ03091	200	0,78	1000	3,90
04	MCQ04091	200	1,04	1000	5,20
05	MCQ05091	200	1,30	1000	6,50
06	MCQ06091	150	1,17	1000	7,80
07	MCQ07091	125	1,14	750	6,83
08	MCQ08091	100	1,04	500	5,20

**MCQ_092** straight, side stackable

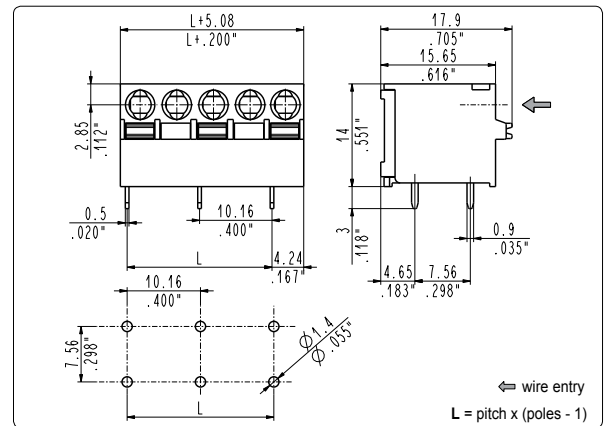
10 mm / .394" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	MCQ02092	300	1,04	1250	4,35
03	MCQ03092	200	1,04	1000	5,22
04	MCQ04092	125	0,87	750	5,22

**MCQ_095** straight, side stackable

5.08 mm / .200" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	MCQ02095	300	0,78	1250	3,25
03	MCQ03095	200	0,78	1000	3,90
04	MCQ04095	200	1,04	1000	5,20
05	MCQ05095	200	1,30	1000	6,50
06	MCQ06095	150	1,17	1000	7,80
07	MCQ07095	125	1,14	750	6,83
08	MCQ08095	100	1,04	500	5,20

**MCQ_096** straight, side stackable

10.16 mm / .400" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	MCQ02096	300	1,04	1250	4,35
03	MCQ03096	200	1,04	1000	5,22
04	MCQ04096	125	0,87	750	5,22

Distributed by:



TEXIM EUROPE

Partner in Electronic Components & Supply Chain Solutions



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen
Tel: +31 (0)53 573 33 33
Fax: +31 (0)53 573 33 30
nl@texim-europe.com



Denmark

Nørregade 15
DK-9240 Nibe
Tel: +45 88 20 26 30
Fax: +45 88 20 26 39
nordic@texim-europe.com



Belgium

Gentsesteenweg 1154-C22
Chaussée de Gand 1154-C22
B-1082 Brussel / Bruxelles
Tel: +32 (0)2 462 01 00
Fax: +32 (0)2 462 01 25
belgium@texim-europe.com



United Kingdom

St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS
Tel: +44 (0)1522 789 555
Fax: +44 (0)845 299 22 26
uk@texim-europe.com



Germany

Justus-von-Liebig-Ring 7-9
D-25451 Quickborn
Tel: +49 (0)4106 627 07-0
Fax: +49 (0)4106 627 07-20
germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München
Tel: +49 (0)89 436 086-0
Fax: +49 (0)89 436 086-19
germany@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg
Tel: +43 (0)662 216026
Fax: +43 (0)662 216026-66
austria@texim-europe.com

Texim Europe B.V.

Elektrostraat 17
NL-7483 PG Haaksbergen
Tel: +31 (0)53 573 33 33
info@texim-europe.com
www.texim-europe.com

