



GREEN ELECTRONICS



MSP

Terminal Blocks



ISO
9001



ISO
14001



BS OHSAS
18001:2007



Sauro®
ELECTRONIC CONNECTORS
by the law

Distributed by:



www.texim-europe.com

Functional features

Dimensional class:
high



Standard colour:
green



Height:
21.5 mm (.846 in)



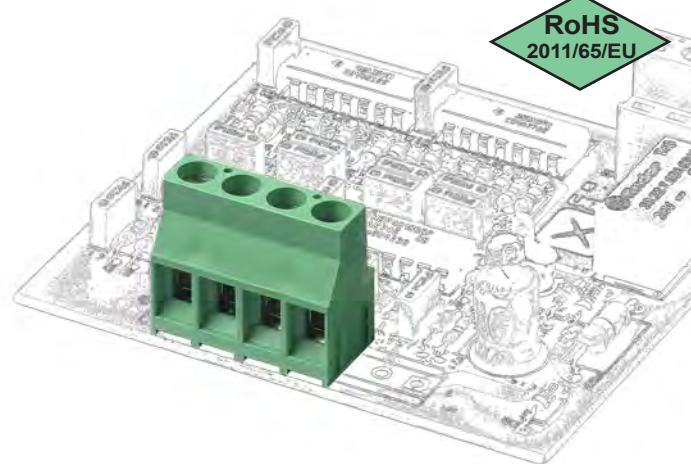

Max approved wire sections:
solid: 6 mm² (IMQ); 10 AWG (UL)
stranded: 4 mm² (IMQ); 10 AWG (UL)
Clamp opening size:
3.8 x 3.2 mm (.150 x .126 in)



Versions:
modular
Single mould poles:
from 2 to 5



Pitches:
imperial 6.35 mm, 7.62 mm, 9.52 mm, 12.7 mm
(.250 in, .300 in, .375 in, 0.500 in)



pitch 6.35 mm
straight, modular



pitch 9.52 mm
straight, modular



pitch 12.7 mm
straight, modular



pitch 6.35 mm
90°, modular



pitch 6.35 mm
35°, modular



Design-in
custom configuration



Design-in
from 2 to 5 poles
straight, modular

Brief description

With the **MSP** modular series terminal blocks for PCBs, wires up to 6 mm² (10 AWG) can be used and therefore a current range of 41A certified can be reached.

It is available in 6.35 mm (.250 in), 7.62 mm (.300 in), 9.52 mm (.375 in) and 12.7 mm (.500 in) Imperial pitches, in monolithic blocks from 2 to 12 poles, with insertion of the wire parallel, inclined at 35° or vertical with respect to the PCB.

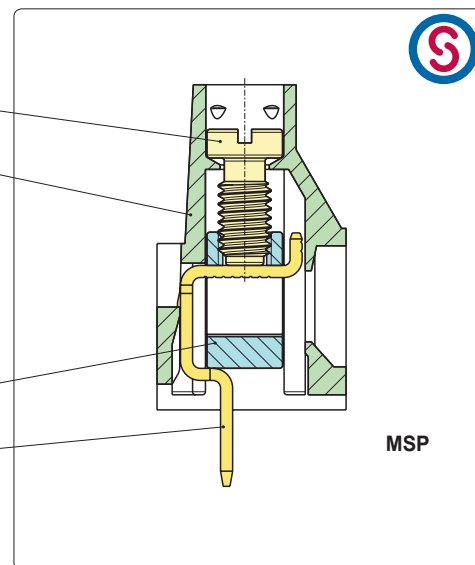
All housings are modular, therefore it is possible to combine monolithic terminal blocks from 2 to 25 poles separately, or to combine basic terminal

blocks until any number of poles is obtained. By making the most of this particular feature a minimum quantity of basic terminal blocks can be stored.

It is simple to manage the product, its storage and the assembly in Kit packages because several versions can be obtained with only one code, both part-numbers and the risk of making mistakes are significantly reduced.

Components features

- M3.5 Nickel plated copper alloy screw.
- PA 6.6 polyamide housing.
Standard colour: GREEN.
V0 self-extinguishing according to UL 94.
Chlorinated solvents resistant,
with no phosphor, dioxin or
detrimental to health halogens.
- Nickel plated copper alloy clamp
- Easy to solder lead-free
tin-plated copper alloy pin.



Mechanical features

Recommended/highest tightening torque	0.8/1.0 Nm (7/8.85 lbf·in)
PCB thickness:	max. 4 mm (.157 in)
PCB hole diameter:	min. 1.3 mm (.051 in)
Stripping length	7±8 mm (.28±.31 in)
Operating temperature range	-40 °C ÷ +110 °C (-40 °F ÷ +230 °F)
Climatic category	40/110/21 according to EN 60068-1

Electrical features*

Solid wire section	30÷10 AWG (UL)* 0.05÷6 mm ² (IMQ)*
Stranded wire section	30÷10 AWG (UL)* 0.05÷4 mm ² (IMQ)*
Rated voltage for 6.35 mm (.250 in) and 7.62 mm (.300 in)	450 V (UL)*
Rated voltage for 9.52 mm (.375 in) and 12.7 mm (.500 in)	750 V (IMQ)*
Rated current	41 A (IMQ)*
Rated current for low rated version	24 A (UL)*
Contact resistance	<15 mΩ
Insulation resistance	>10 ⁹ Ω (500V DC)

*All the above mentioned data refer to the highest values amongst the certified ones.

V voltage, I current values and tightening torque are related to the norms to be applied to the product and to its use.

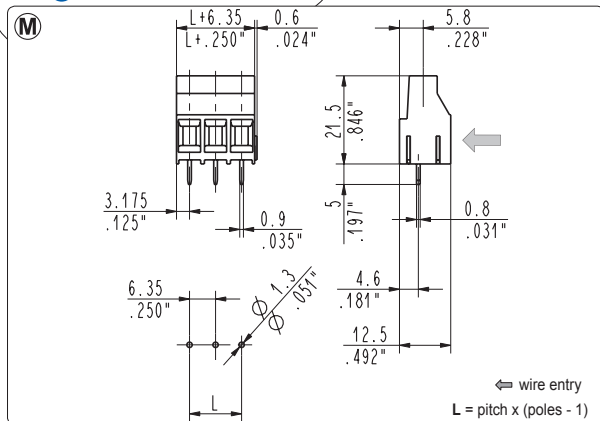
Approvals

IEC-EN	IEC:	450 V - T 110 - 41 A - 6 mm ² solid (32 A - 4 mm ² stranded) for 6.35 mm (.250 in) and 7.62 mm (.300 in) pitch
	EN 60998	750 V - T 110 - 41 A - 6 mm ² solid (32 A - 4 mm ² stranded) for 9.52 mm (.375 in) and 12.7 mm (.500 in) pitch

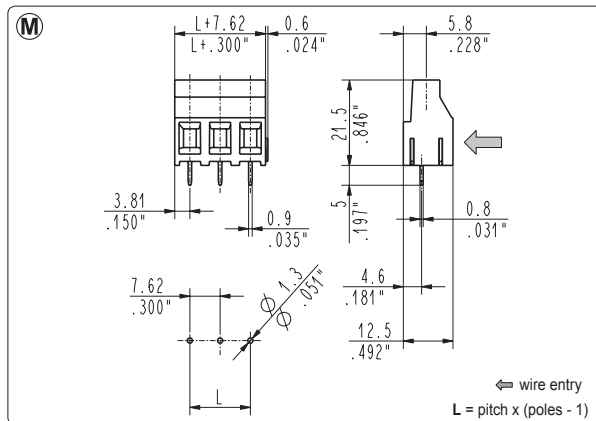
UL	UL:	300 V - 30 A (24 A for low rated current versions) - 30÷10 AWG - 7 lbf·in for 6.35 mm (.250 in) and 7.62mm (.300 in) pitch
	File E167473	600 V - 30 A (24 A for low rated current versions) - 30÷10 AWG - 7 lbf·in for 9.52 mm (.375 in) and 12.7 mm (.500 in) pitch
		Application values for end-use equipment have to be in accordance to UL norms and applicable to it.

VDE	VDE:	450 V - 32 A - T 110 - 4 mm ² for 6.35 mm (.250 in) pitch
	File n. 40021758	750 V - 32 A - T 110 - 4 mm ² for 9.52 mm (.375 in) pitch

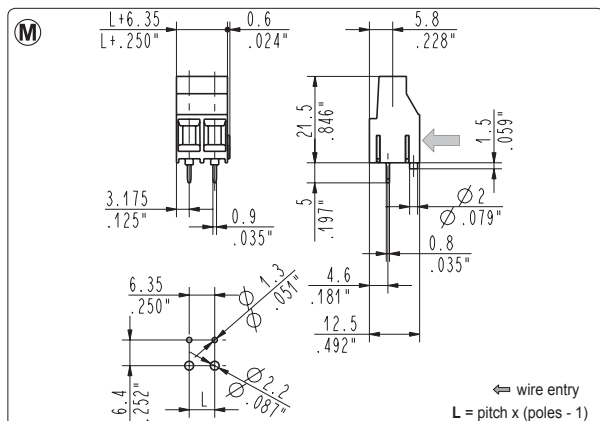
IMQ	IMQ:	450 V - T 110 - 41 A - 6 mm ² solid (32 A - 4 mm ² stranded) for 6.35 mm (.250 in) pitch
	File: CA02.00899	750 V - T 110 - 41 A - 6 mm ² solid (32 A - 4 mm ² stranded) for 9.52 mm (.375 in) pitch

**MSP_00S****straight, modular****6.35 mm / .250" pitch**

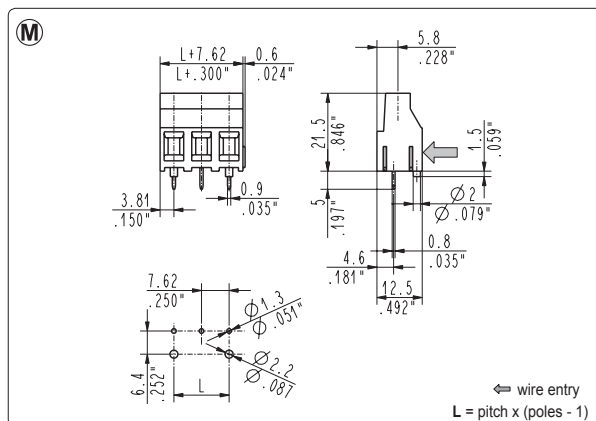
Poles	Code	Pcs/pack.	W [kg]*
02	MSP0200S	720	4,46
03	MSP0300S	480	4,46
04	MSP0400S	360	4,46
05	MSP0500S	280	4,34

**MSP_007****straight, modular****7.62 mm / .300" pitch**

Poles	Code	Pcs/pack.	W [kg]*
02	MSP02007	600	3,90
03	MSP03007	400	3,90
04	MSP04007	280	3,64
05	MSP05007	240	3,90

**MSP_00S-0000P****straight, modular with VDE pegs****6.35 mm / .250" pitch**

Poles	Code	Pcs/pack.	W [kg]*
02	MSP0200S-0000P	720	4,46
03	MSP0300S-0000P	480	4,46

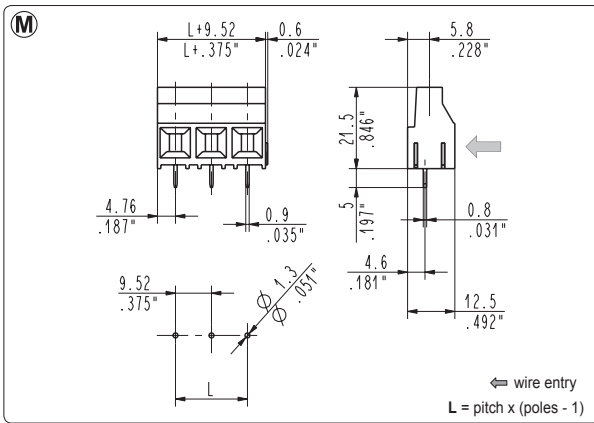
**MSP_007-0000P****straight, modular with VDE pegs****7.62 mm / .300" pitch**

Poles	Code	Pcs/pack.	W [kg]*
02	MSP02007-0000P	600	3,90
03	MSP03007-0000P	400	3,90

Distributed by:

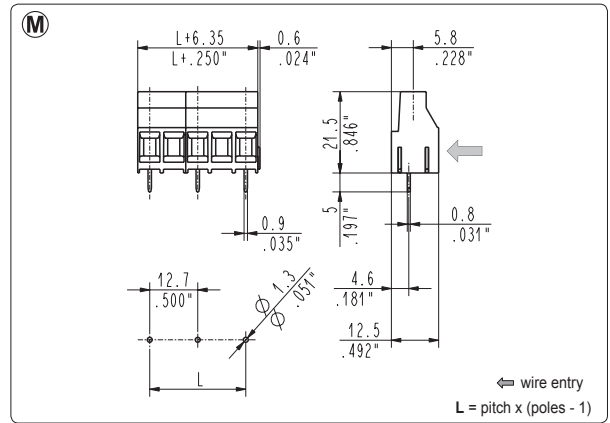


www.texim-europe.com

**MSP_00N** straight, modular

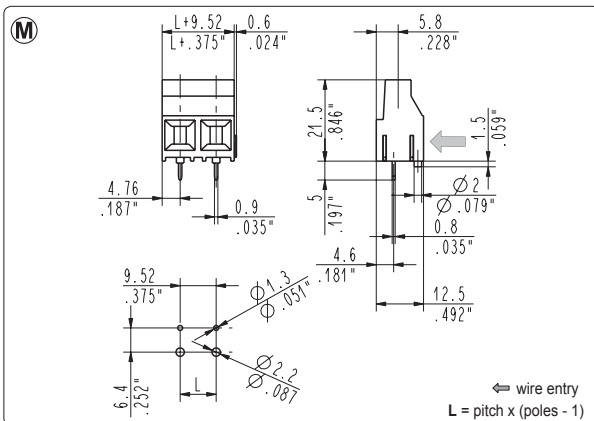
9.52 mm / .375" pitch

Poles	Code	Pcs/pack.	W [kg]*
02	MSP0200N	480	3,30
03	MSP0300N	320	3,30

**MSP_00U** straight, modular

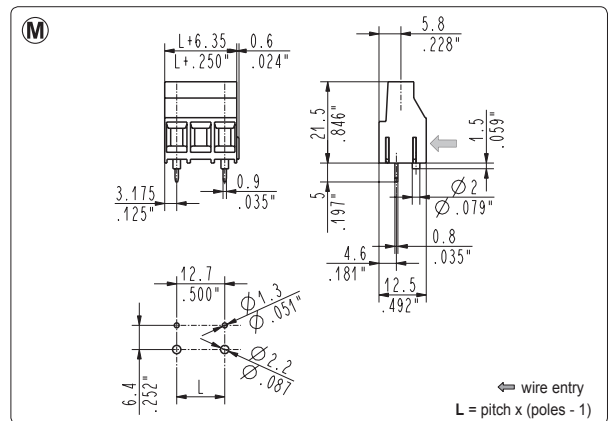
12,7 mm / .500" pitch

Poles	Code	Pcs/pack.	W [kg]*
01	MSP0100U	720	2,59
02	MSP0200U	480	3,46
03	MSP0300U	280	3,02

**MSP_00N-0000P** straight, modular with VDE pegs

9.52 mm / .375" pitch

Poles	Code	Pcs/pack.	W [kg]*
02	MSP0200N-0000P	480	3,30
03	MSP0300N-0000P	320	3,30

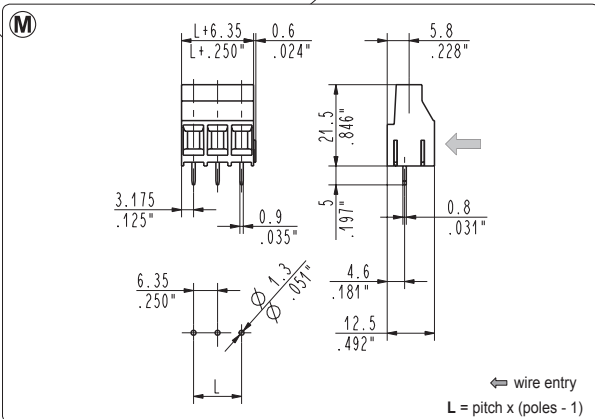
**MSP_00U-0000P** straight, modular with VDE pegs

12,7 mm / .500" pitch

Poles	Code	Pcs/pack.	W [kg]*
02	MSP0200U-0000P	720	2,59
03	MSP0300U-0000P	480	3,46

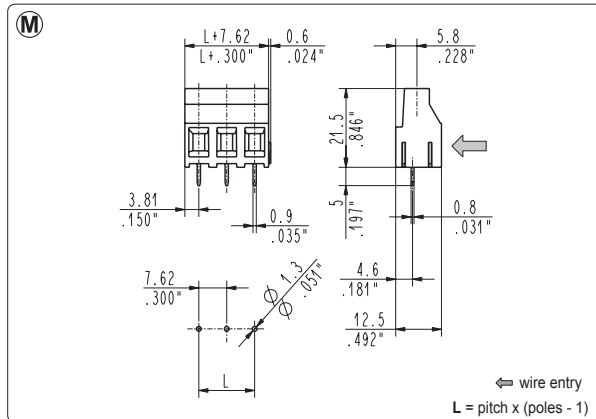
Distributed by:




MSP_00S-000E straight, modular, low ampere rating

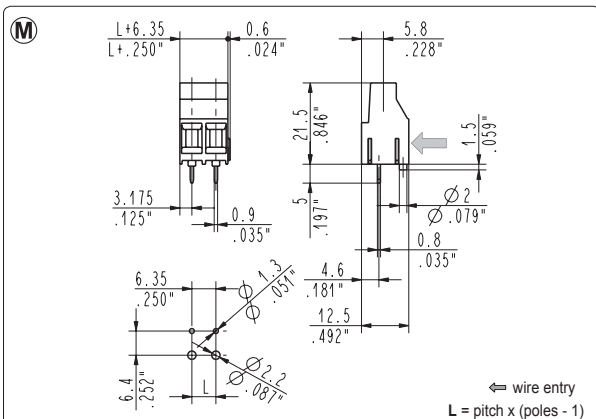
6.35 mm / .250" pitch

Poles	Code	Pcs/pack.	W [kg]*
02	MSP0200S-000E	720	4,46
03	MSP0300S-000E	480	4,46
04	MSP0400S-000E	360	4,46
05	MSP0500S-000E	280	4,34


MSP_007-000E straight, modular, low ampere rating

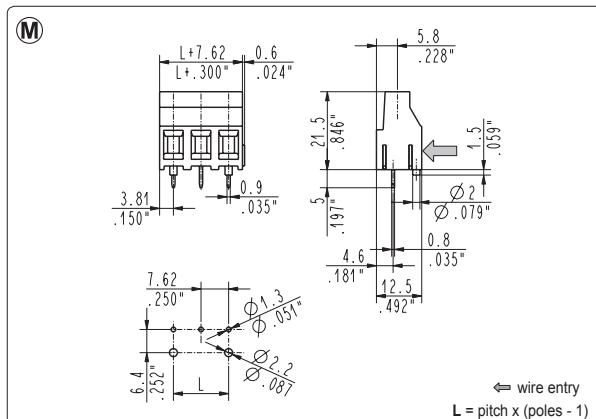
7.62 mm / .300" pitch

Poles	Code	Pcs/pack.	W [kg]*
02	MSP02007-000E	600	3,90
03	MSP03007-000E	400	3,90
04	MSP04007-000E	280	3,64
05	MSP05007-000E	240	3,90


MSP_00S-000EP straight, modular, low ampere rating with pegs

6.35 mm / .250" pitch

Poles	Code	Pcs/pack.	W [kg]*
02	MSP0200S-000EP	720	4,46
03	MSP0300S-000EP	480	4,46

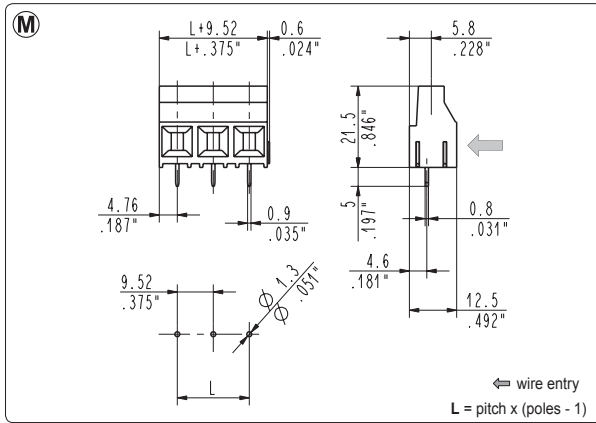

MSP_007-000EP straight, modular, low ampere rating with pegs

7.62 mm / .300" pitch

Poles	Code	Pcs/pack.	W [kg]*
02	MSP02007-000EP	600	3,90
03	MSP03007-000EP	400	3,90

Distributed by:

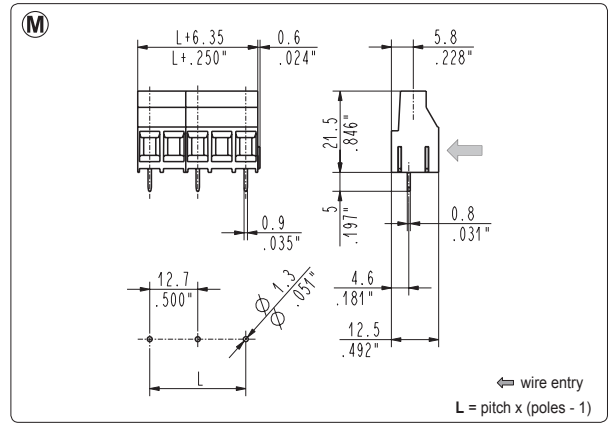


**MSP_00N-000E**

straight, modular, low ampere rating

9.52 mm / .375" pitch

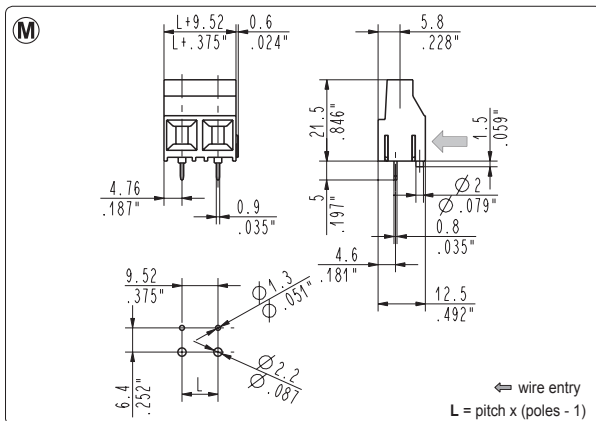
Poles	Code	Pcs/pack.	W [kg]*
02	MSP0200N-000E	480	3,30
03	MSP0300N-000E	320	3,30

**MSP_00U-000E**

straight, modular, low ampere rating

12,7 mm / .500" pitch

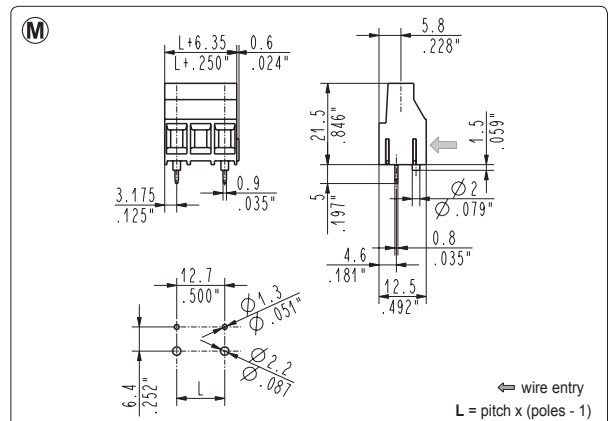
Poles	Code	Pcs/pack.	W [kg]*
01	MSP0100U-000E	720	2,59
02	MSP0200U-000E	480	3,46
03	MSP0300U-000E	280	3,02

**MSP_00N-000EP**

straight, modular, low ampere rating with pegs

9.52 mm / .375" pitch

Poles	Code	Pcs/pack.	W [kg]*
02	MSP0200N-000EP	480	3,30
03	MSP0300N-000EP	320	3,30

**MSP_00U-000EP**

straight, modular, low ampere rating with pegs

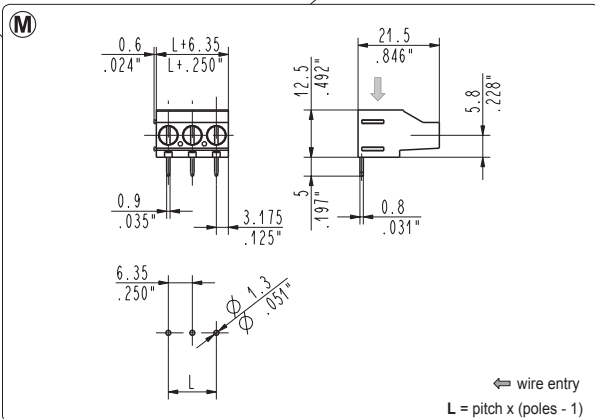
12,7 mm / .500" pitch

Poles	Code	Pcs/pack.	W [kg]*
02	MSP0200U-000EP	720	2,59
03	MSP0300U-000EP	480	3,46

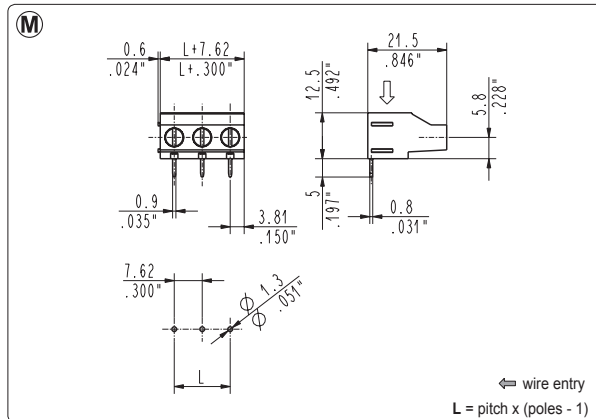
Distributed by:



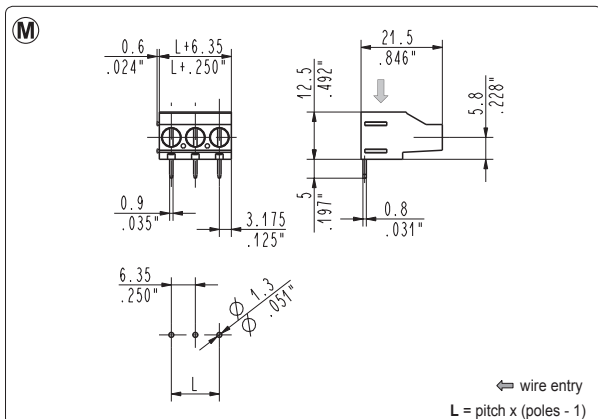
www.texim-europe.com


MSP_09S 90°, modular
6.35 mm / .250" pitch

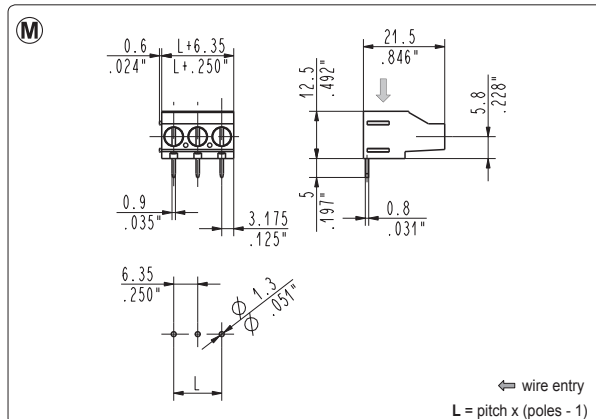
Poles	Code	Pcs/pack.	W [kg]*
02	MSP0209S	720	4,46
03	MSP0309S	480	4,46
04	MSP0409S	360	4,46
05	MSP0509S	280	4,34


MSP_097 90°, modular
7.62 mm / .300" pitch

Poles	Code	Pcs/pack.	W [kg]*
02	MSP02097	600	3,90
03	MSP03097	400	3,90
04	MSP04097	280	3,64
05	MSP05097	240	3,90


MSP_09S-000E 90°, low ampere rating, modular
6.35 mm / .250" pitch

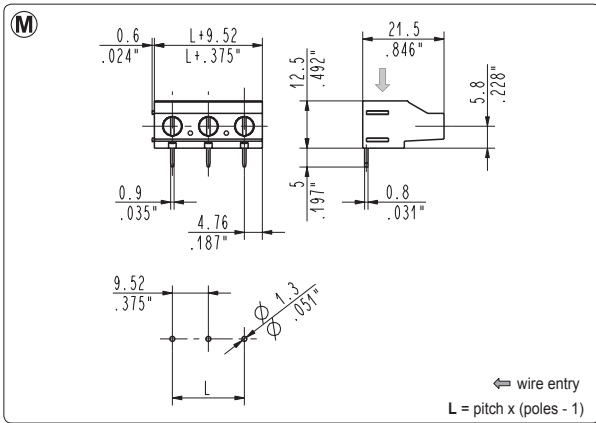
Poles	Code	Pcs/pack.	W [kg]*
02	MSP0209S-000E	720	4,46
03	MSP0309S-000E	480	4,46
04	MSP0409S-000E	360	4,46
05	MSP0509S-000E	280	4,34


MSP_097-000E 90°, low ampere rating, modular
7.62 mm / .300" pitch

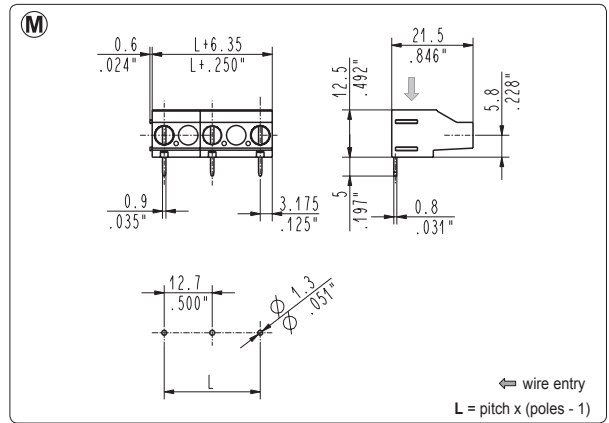
Poles	Code	Pcs/pack.	W [kg]*
02	MSP02097-000E	600	3,90
03	MSP03097-000E	400	3,90
04	MSP04097-000E	280	3,64
05	MSP05097-000E	240	3,90

Distributed by:

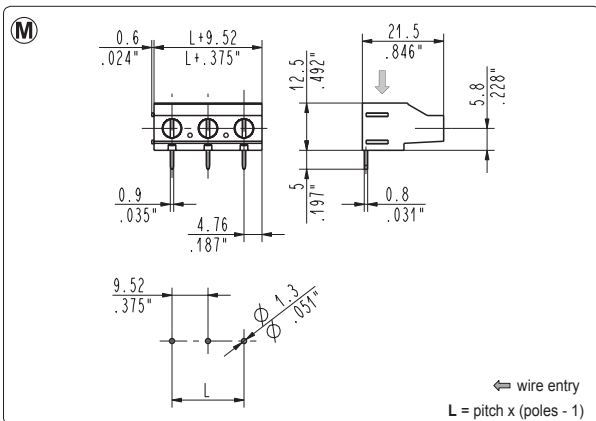


**MSP_09N 90°, modular****9.52 mm / .375" pitch**

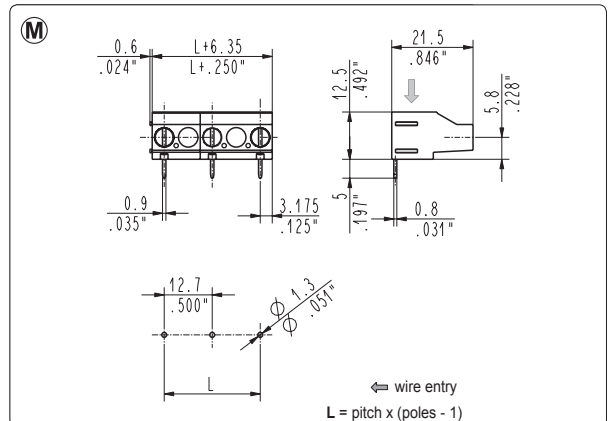
Poles	Code	Pcs/pack.	W [kg]*
02	MSP0209N	480	3,30
03	MSP0309N	320	3,30

**MSP_09U 90°, modular****12,7 mm / .500" pitch**

Poles	Code	Pcs/pack.	W [kg]*
01	MSP0109U	720	2,59
02	MSP0209U	480	3,46
03	MSP0309U	280	3,02

**MSP_09N-000E 90°, low ampere rating, modular****9.52 mm / .375" pitch**

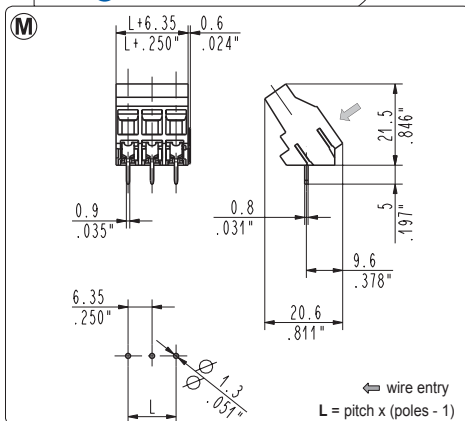
Poles	Code	Pcs/pack.	W [kg]*
02	MSP0209N-000E	480	3,30
03	MSP0309N-000E	320	3,30

**MSP_09U-000E 90°, low ampere rating, modular****12,7 mm / .500" pitch**

Poles	Code	Pcs/pack.	W [kg]*
01	MSP0109U-000E	720	2,59
02	MSP0209U-000E	480	3,46
03	MSP0309U-000E	280	3,02

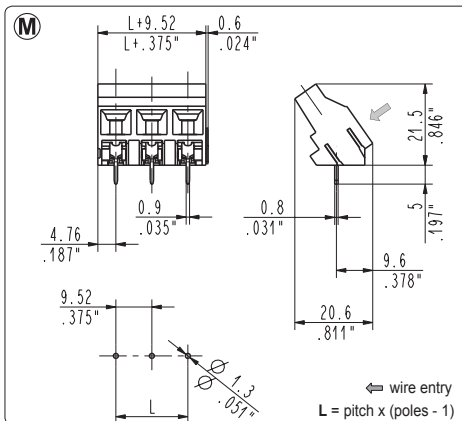
Distributed by:




MSP_04S 35°, modular

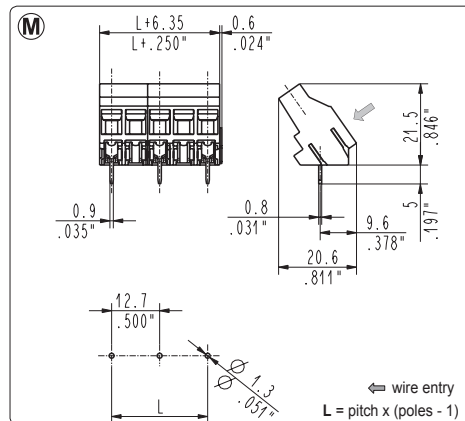
6.35 mm / .250" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	MSP0204S	200	1,19	1000	5,94
03	MSP0304S	200	1,19	1000	5,94


MSP_04N 35°, modular

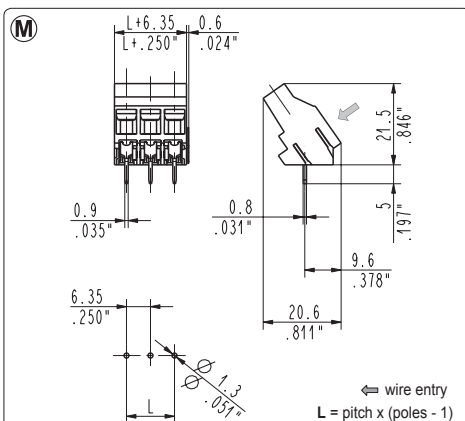
9.52 mm / .375" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	MSP0204N	150	1,03	750	5,15
03	MSP0304N	100	1,03	500	5,15


MSP_04U 35°, modular

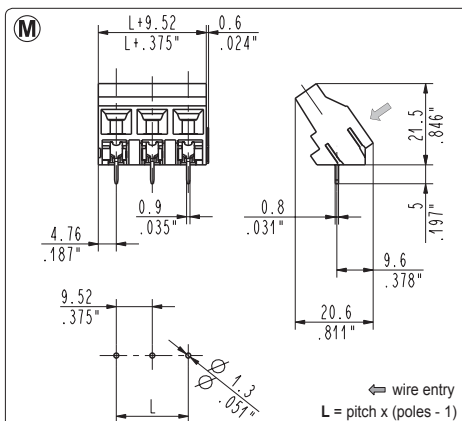
12.7 mm / .500" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
01	MSP0104U	125	0,89	750	5,37
02	MSP0204U	75	0,81	500	5,37


MSP_04S-000E 35°, modular, low ampere rating

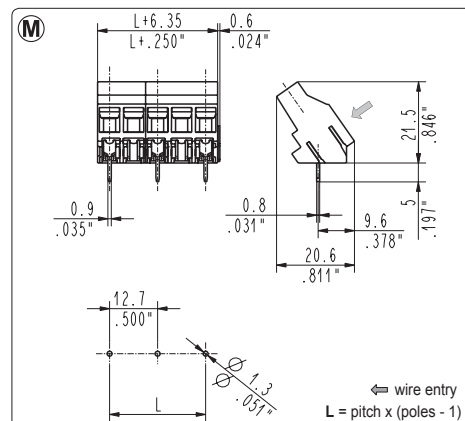
6.35 mm / .250" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	MSP0204S-000E	200	1,19	1000	5,94
03	MSP0304S-000E	200	1,19	1000	5,94


MSP_04N-000E 35°, modular, low ampere rating

9.52 mm / .375" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
02	MSP0204N-000E	150	1,03	750	5,15
03	MSP0304N-000E	100	1,03	500	5,15


MSP_04U-000E 35°, modular, low ampere rating

12.7 mm / .500" pitch

Poles	Code	Pcs/pack.	W [kg]*	Pcs/Ind.**	W [kg]*
01	MSP0104U-000E	125	0,89	750	5,37
02	MSP0204U-000E	75	0,81	500	5,37

Distributed by:



TEXIM EUROPE

Partner in Electronic Components & Supply Chain Solutions



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen
Tel: +31 (0)53 573 33 33
Fax: +31 (0)53 573 33 30
nl@texim-europe.com



Denmark

Nørregade 15
DK-9240 Nibe
Tel: +45 88 20 26 30
Fax: +45 88 20 26 39
nordic@texim-europe.com



Belgium

Gentsesteenweg 1154-C22
Chaussée de Gand 1154-C22
B-1082 Brussel / Bruxelles
Tel: +32 (0)2 462 01 00
Fax: +32 (0)2 462 01 25
belgium@texim-europe.com



United Kingdom

St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS
Tel: +44 (0)1522 789 555
Fax: +44 (0)845 299 22 26
uk@texim-europe.com



Germany

Justus-von-Liebig-Ring 7-9
D-25451 Quickborn
Tel: +49 (0)4106 627 07-0
Fax: +49 (0)4106 627 07-20
germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München
Tel: +49 (0)89 436 086-0
Fax: +49 (0)89 436 086-19
germany@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg
Tel: +43 (0)662 216026
Fax: +43 (0)662 216026-66
austria@texim-europe.com

Texim Europe B.V.

Elektrostraat 17
NL-7483 PG Haaksbergen
Tel: +31 (0)53 573 33 33
info@texim-europe.com
www.texim-europe.com

