



晶采光電科技股份有限公司  
AMPIRE CO., LTD.

Distributed by:



## SPECIFICATIONS FOR LCD MODULE

<b>CUSTOMER</b>	
<b>CUSTOMER PART NO.</b>	
<b>AMPIRE PART NO.</b>	AM-1280800N1TZQW-30H
<b>APPROVED BY</b>	
<b>DATE</b>	

☐ Approved For Specifications




☐ Approved For Specifications & Sample

**AMPIRE CO., LTD.**

**Building A., 4F., No.116, Sec. 1, Sintai 5th Rd., Xizhi Dist,  
New Taipei City 221, Taiwan (R.O.C.)**

**新北市汐止區新台五路一段 116 號 4 樓(東方科學園區 A 棟)**

**TEL:886-2-26967269 , FAX:886-2-26967196 or 26967270**

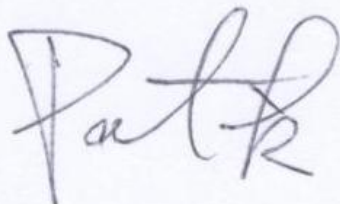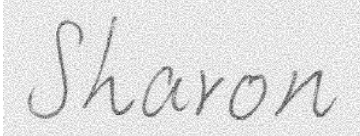APPROVED BY	CHECKED BY	ORGANIZED BY
		

## RECORD OF REVISION

Revision Date	Page	Contents	Editor
2014/11/11	-	New Release	Sharon
2015/01/28	20	Revised the Pin discretion of LED driving board.	Emil

## 1. Features

10.1 TFT Liquid Crystal Display module is a color active matrix thin film transistor (TFT) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. It is composed of a TFT LCD panel, a timing controller, voltage reference, common voltage, column driver, and row driver circuit. This TFT LCD has a 10.1-inch diagonally measured active display area with 1280 horizontal by 800 vertical pixel array resolution.

## 2. PHYSICAL SPECIFICATIONS

Item	Specifications	Remark
LCD size	10.1 inch(Diagonal)	
Driver element	a-Si TFT active matrix	
Display resolution	1280 (W) × 3(RGB) x 800(H) dots	
Display mode	Normally Black, Transmissive (IPS)	
Dot pitch	0.1695 (W) x0.1695 (H) mm	
Active area	216.96 (W) x 135.6 (H) mm	
Module size	231 (W) x 154.4 (H) × 5.7 (D) mm	
Surface treatment	HC	
Color arrangement	R.G.B-stripe	
Interface	Digital	
Weight	230 g	

Distributed by:



[www.texim-europe.com](http://www.texim-europe.com)

### 3. ABSOLUTE MAXIMUM RATINGS

ITEM	SYMBOL	VALUES		UNIT	REMARK
		MIN	MAX		
Power Voltage	V <sub>DD</sub>	-0.3	7.0	V	VSS=0V, TA=25°C
	V <sub>BL</sub>	-0.3	24	V	
Operation Temperature	T <sub>op</sub>	-20	70	°C	
Storage Temperature	T <sub>st</sub>	-30	80	°C	

Note 1: The absolute maximum rating values of this product are not allowed to be exceeded at any times.

Should a module be used with any of the absolute maximum ratings exceeded, the characteristics of the module may not be recovered, or in an extreme case, the module may be permanently destroyed.


## 4. ELECTRICAL SPECIFICATIONS

### 4.1 Typical Operation Conditions

Item		Symbol	Min	Typ	Max	Unit	Note
LCD Drive Voltage		VDD	3.0	3.3	3.6	V	(2),(4)
VDD Current	White Pattern	IDD	--	0.27	--	A	(3),(4)
VDD Power Consumption	White Pattern	PDD	--	--	1.0	W	(3),(4)
Rush Current		Irush			1.5	A	(1),(4),(5)
Allowable Logic/LCD Drive Ripple Voltage		VDDrp			300	mV	(4)
LED Driver Power Voltage		VLED	--	5	--	V	
LED Driver Current		ILED	--	0.85	--	A	LED_EN =ADJ=High
ADJ frequency		f <sub>PWM</sub>	100	--	20k	Hz	
ADJ logic level High		VIH	2.4	--	--	V	
ADJ logic level High		VIL	--	--	0.7	V	

Note 1.Measure Condition

Figure 9 VDD rising time

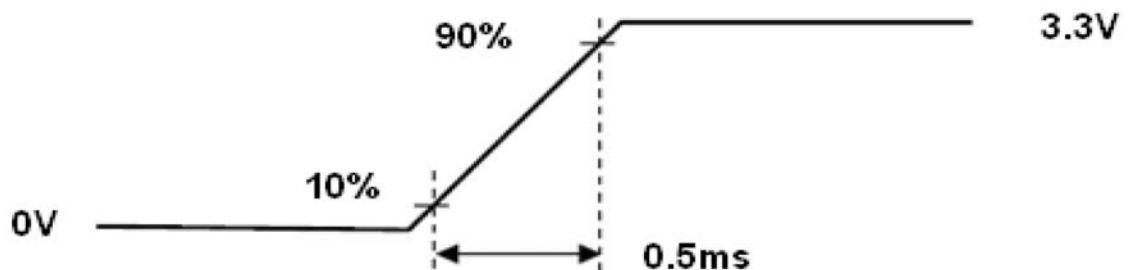


VDD rising time

Note 2.VDD Power Dip Condition

If  $V_{TH} < V_{DDRVmin}$  , then  $t_{dR} < 10ms$ ; when the voltage return to normal our panel must revive automatically.


Figure 12 VDD Power Dip

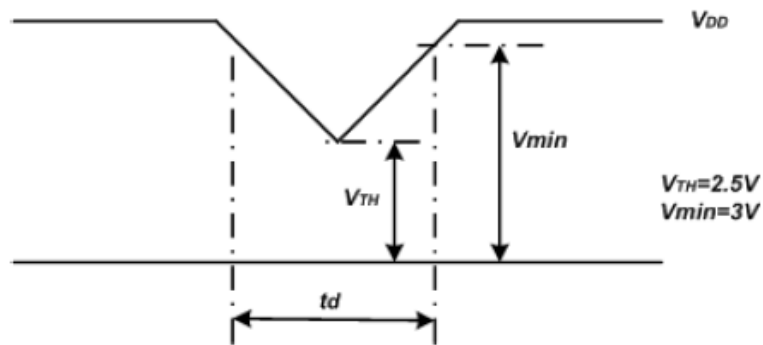

Note (3) Frame Rate=60Hz, VDD=3.3V,DC Current.

Note (4) Operating temperature 25°C , humidity 55%RH.

Note (5) The reference measurement circuit of rush current.

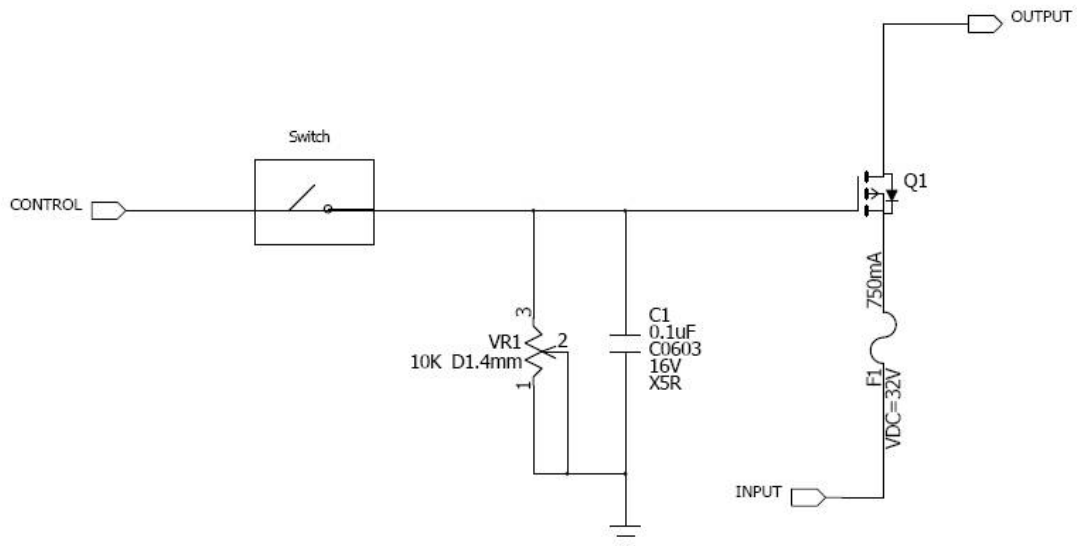


## 4-2 LED Driving Conditions


ITEM	SYMBOL	MIN	TYP	MAX	UNIT	CONDITION
LED Backlight Voltage	$V_{BL}$	--	16	18	V	$I_{BL}=200\text{mA}$
LED Backlight Current	$I_{BL}$	-	200	--	mA	$T_a=25^\circ\text{C}$
LED Life Time		--	30	-	kHr	Note*

Note\* : Brightness to be decreased to 50% of the initial value.


$T_a=25^\circ\text{C}$

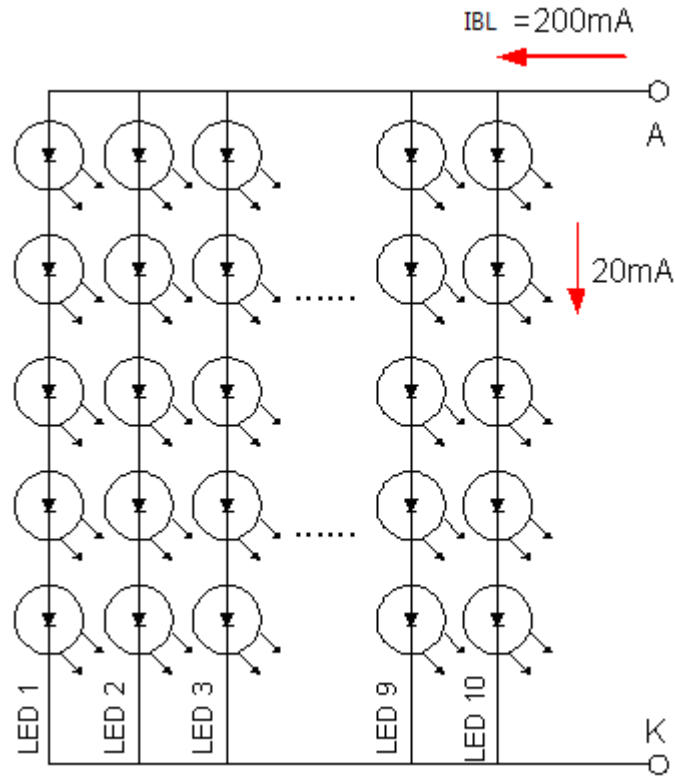

When LCM is operated over  $40^\circ\text{C}$  ambient temperature, the LED should be follow :

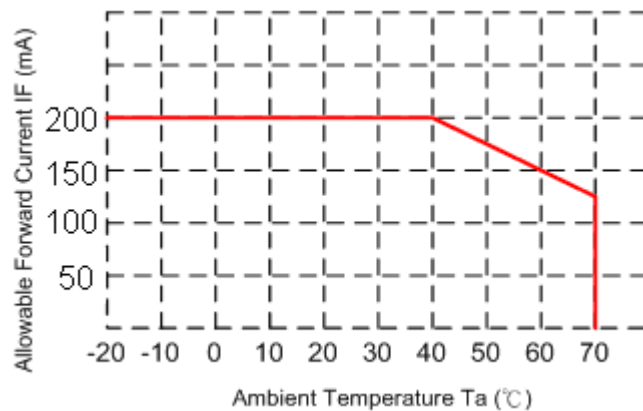

### 4.3 Power Sequence

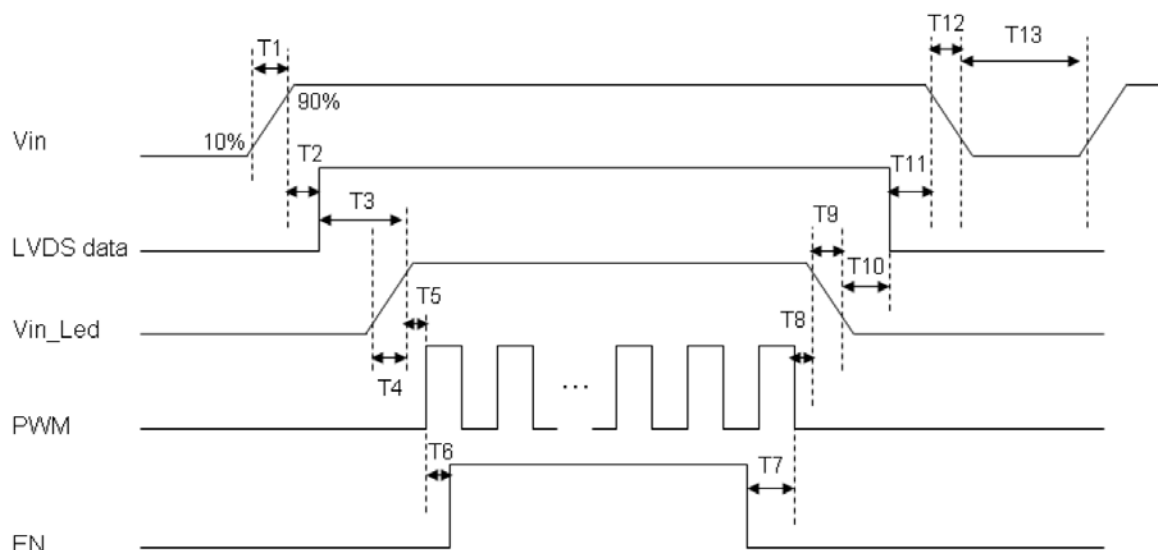

**Table 10 Power Sequencing Requirements**

Parameter	Symbol	Unit	Min	Typ.	Max
VIN Rise Time	T1	ms	0.5	--	10
VIN Good to Signal Valid	T2	ms	30	--	90
Signal Valid to Backlight On	T3	ms	200	--	--
Backlight Power On Time	T4	ms	0.5	--	--
Backlight VDD Good to System PWM On	T5	ms	10	--	--
System PWM ON to Backlight Enable ON	T6	ms	10	--	--
Backlight Enable Off to System PWM Off	T7	ms	0	--	--
System PWM Off to B/L Power Disable	T8	ms	10	--	--
Backlight Power Off Time	T9	ms	--	10	30
Backlight Off to Signal Disable	T10	ms	200	--	--
Signal Disable to Power Down	T11	ms	0	--	50
VIN Fall Time	T12	ms	--	10	30
Power Off	T13	ms	500	--	--


## 4.4 LVDS Signal Timing Characteristics

### 4.4.1 AC Electrical Characteristics


Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Differential Input High	V <sub>th</sub>	-	-	+100	mV	V <sub>CM</sub> =+1.2V
Differential Input Low	V <sub>tl</sub>	-100	-	-	mV	V <sub>CM</sub> =+1.2V
Magnitude Differential Input	V <sub>ID</sub>	200	-	400	mV	-
Common Mode Voltage	V <sub>CM</sub>	0.3+ (V <sub>ID</sub> /2)	-	VDD-1.2- (V <sub>ID</sub> /2)	V	-
Common Mode Voltage	ΔV <sub>CM</sub>	-	-	50	mV	V <sub>CM</sub> =+1.2V

Note (1) Input signals shall be low or Hi-Z state when VDD is off.

(2) All electrical characteristics for LVDS signal are defined and shall be measured at the interface connector of LCD.

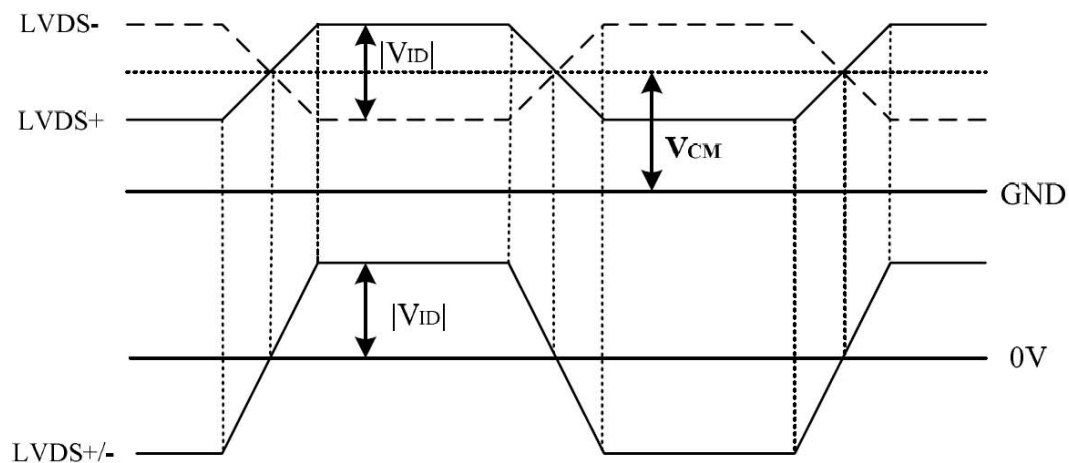


**Figure 9 LVDS Data Mapping**

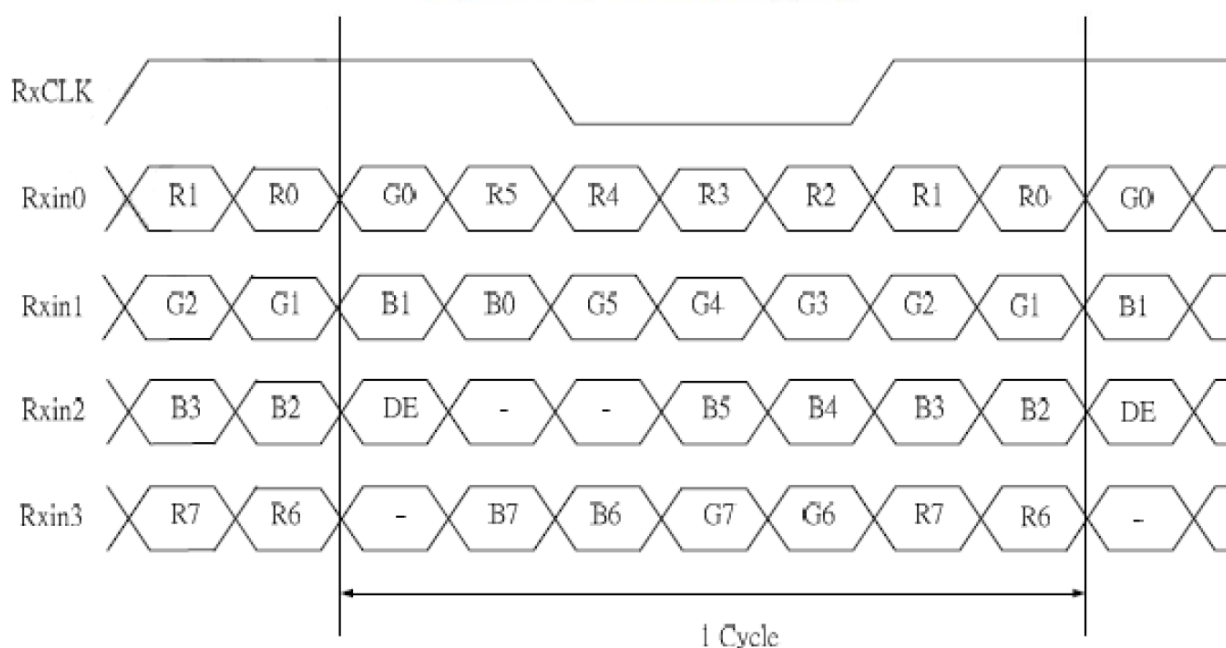

#### 4.4.2 Timing Table

Parameter	Symbol	Unit	Min.	Typ.	Max.
Frame Rate	--	Hz	-	60	-
Frame Period	$t_v$	line	(815)	(823)	(1023)
Vertical Display Time	$t_{VD}$	line	800		
Vertical Blanking Time	$t_{VW}+t_{VBP}+t_{VFP}$	line	(15)	(23)	(33)
1 Line Scanning Time	$t_H$	clock	(1410)	(1440)	(1470)
Horizontal Display Time	$t_{HD}$	clock	1280		
Horizontal Blanking Time	$t_{HW}+t_{HBP}+t_{HFP}$	clock	(60)	(160)	(190)
Clock Rate	$1/T_C$	MHz	(68.9)	(71.1)	(73.4)

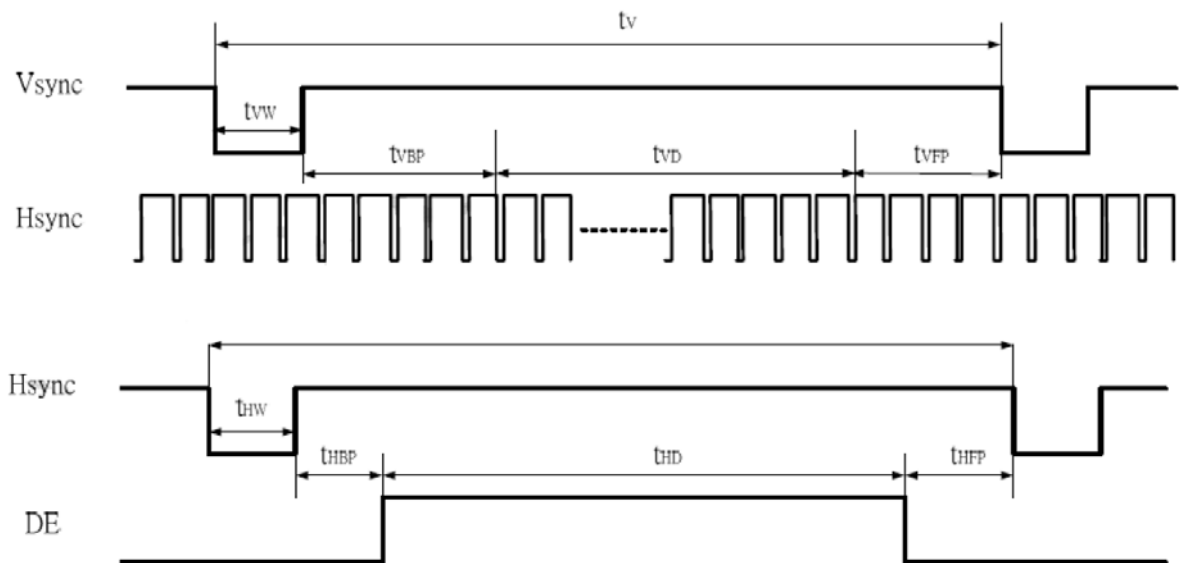

## 5. INTERFACE

### 5.1 LCD INTERFACE

Pin #	Singnal Name	Description	Remarks
1	NC	Not Connect	-
2	VDD	Power Supply, 3.3V (typical)	-
3	VDD	Power Supply, 3.3V (typical)	
4	VDD_EDID	Power Supply for EDID I2C Flash IC	
5	SCL_EDID	I2C Serial Clock for EDID I2C Flash IC	
6	SDA_EDID	I2C Serial Data for EDID I2C Flash IC	
7	NC	Not Connect	
8	LV0N	-LVDS differential data input	
9	LV0P	+LVDS differential data input	
10	GND	Ground	
11	LV1N	-LVDS differential data input	
12	LV1P	+LVDS differential data input	
13	GND	Ground	
14	LV2N	-LVDS differential data input	
15	LV2P	+LVDS differential data input	
16	GND	Ground	
17	LVCLKN	-LVDS differential data input	
18	LVCLKP	+LVDS differential data input	
19	GND	Ground	
20	LV3N	-LVDS differential data input	
21	LV3P	+LVDS differential data input	
22	GND	Ground	
23	NC	Not Connect	
24	NC	Not Connect	
25	NC	Not Connect	
26	NC	Not Connect	
27	NC	Not Connect	
28	NC	Not Connect	
29	CABC_EN	Keep to NC in this model	
30	NC	Not Connect	
31	NC	Not Connect	
32	NC	Not Connect	
33	NC	Not Connect	
34	NC	Not Connect	
35	BIST	Set to High level: manufacture test pattern, Low level: customer application.	
36-40	NC	Not Connect	

### 5.2 LED DRIVER BOARD INTERFACE

CN2: JST SM04B-SRSS-TB (LF) (SN)

Pin No.	Symbol	I/O	Description	Note
1	VLED	P	Voltage for LED circuit	
2	LED_EN	I	LED BLU ON/OFF. High level: ON; Low level: OFF.	
3	GND	I	Power ground	
4	ADJ	P	Adjust the LED brightness by PWM	

## 6. Optical Specifications


**Table 2 Optical Characteristics**

Item	Conditions		Min.	Typ.	Max.	Unit	Note
Viewing Angle ( CR>10 )	Horizontal	$\theta_L$	(75)	(85)	-	degree	(1),(2),(3)
		$\theta_R$	(75)	(85)	-		
	Vertical	$\theta_T$	(75)	(85)	-		
		$\theta_B$	(75)	(85)	-		
Contrast Ratio	Center		(600)	(800 )	-	-	(1),(2),(4)
Response Time	Rising		-	-	-	ms	(1),(2),(5)
	Falling		-	-	-	ms	
	Rising + Falling		-	25	-	ms	
Color Chromaticity (CIE1931)	NTSC		-	45	-	%	(1),(2)
	Red	x	Typ. -0.05	0.561	Typ. +0.05	-	(1),(2)
	Red	y		0.334		-	
	Green	x		0.341		-	
	Green	y		0.568		-	
	Blue	x		0.161		-	
	Blue	y		0.129		-	
	White	x	-	0.313	-	-	
	White	y	-	0.329	-	-	
White Luminance	Center		400	500	-	cd/m <sup>2</sup>	(1),(2),(6)
Luminance Uniformity	9Points		70	75	-	%	(1),(2),(6)


Note (1) Measurement Setup:

The LCD module should be stabilized at given temperature(25°C) for 15 minutes to Avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting backlight for 15 minutes in a windless room.

**Figure 4 Measurement Setup**

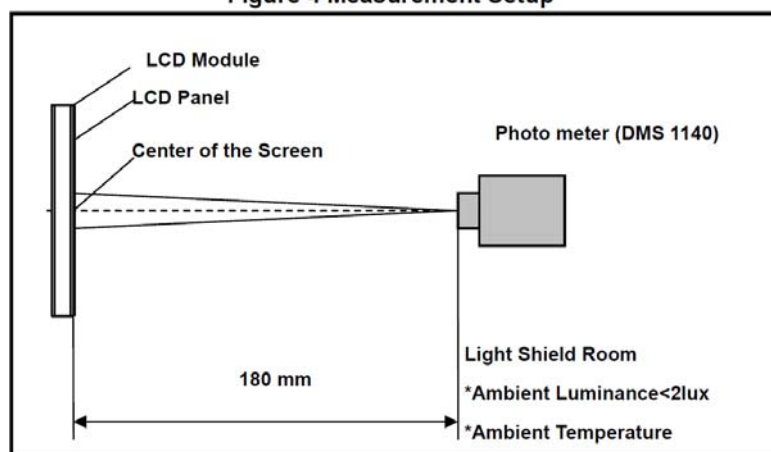

**Figure 5 Definition of Viewing Angle**

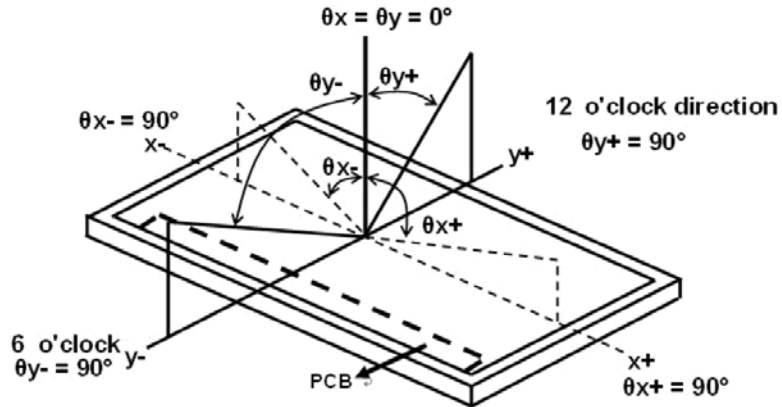

Note (4) Definition Of Contrast Ratio (CR)


The contrast ratio can be calculated by the following expression

$$\text{Contrast Ratio (CR)} = L_{255} / L_0$$

L63: Luminance of gray level 255, L0: Luminance of gray level 0

Note (5) Definition Of Response Time ( $T_R$ ,  $T_F$ )

**Figure 6 Definition of Response Time**

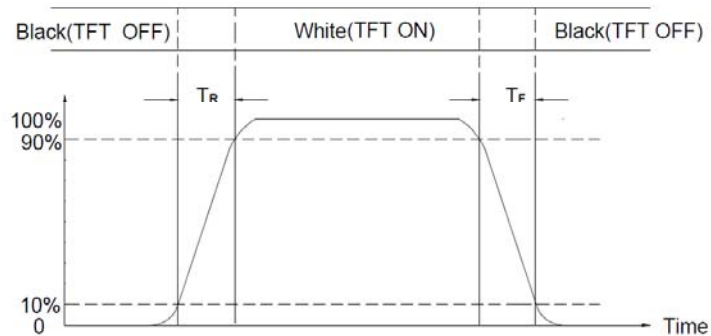


Note (6) Definition Of brightness Luminance

$$\text{Luminance uniformity} = \frac{\text{Min}(L_1, L_6, L_7, L_8, L_9, L_{10}, L_{11}, L_{12}, L_{13})}{\text{Max}(L_1, L_6, L_7, L_8, L_9, L_{10}, L_{11}, L_{12}, L_{13})} \times 100\%$$

H—Active area length V—Active area width

**Figure 7 Measurement Locations**

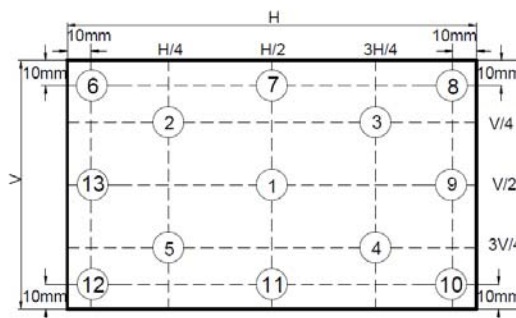

## 7. ELIABILITY TEST CONDITIONS

Test Item	Test Conditions	Note
High Temperature Operation	70±3°C ,Dry t=240 hrs	
Low Temperature Operation	-20±3°C, Dry t=240 hrs	
High Temperature Storage	80±3°C , Dry t=240 hrs	1,2
Low Temperature Storage	-30±3°C ,Dry t=240 hrs	1,2
Thermal Shock Test	-20°C ~ 25°C ~ 70°C 30 m in. 5 min. 30 min. ( 1 cycle ) Total 100 cycle(Dry)	1,2
Storage Humidity Test	60 °C, Humidity 90%, 240 hrs	1,2
Vibration Test (Packing)	Sweep frequency : 10 ~ 55 ~ 10 Hz/1min Amplitude : 0.75mm Test direction : X.Y.Z/3 axis Duration : 30min/each axis	2

Note 1 : Condensation of water is not permitted on the module.

Note 2 : The module should be inspected after 1 hour storage in normal conditions (15-35°C , 45-65%RH).

Definitions of life end point :

- Current drain should be smaller than the specific value.
- Function of the module should be maintained.
- Appearance and display quality should not have degraded noticeably.
- Contrast ratio should be greater than 50% of the initial value.

## **8. GENERAL PRECAUTION**

### **8.1 Use Restriction**

This product is not authorized for use in life supporting systems, aircraft navigation control systems, military systems and any other application where performance failure could be life-threatening or otherwise catastrophic.

### **8.2 Disassembling or Modification**

Do not disassemble or modify the module. It may damage sensitive parts inside LCD module, and may cause scratches or dust on the display. AMPIRE does not warrant the module, if customers disassemble or modify the module.

### **8.3 Breakage of LCD Panel**

- (1) If LCD panel is broken and liquid crystal spills out, do not ingest or inhale liquid crystal, and do not contact liquid crystal with skin.
- (2) If liquid crystal contacts mouth or eyes, rinse out with water immediately.
- (3) If liquid crystal contacts skin or cloths, wash it off immediately with alcohol and rinse thoroughly with water.
- (4) Handle carefully with chips of glass that may cause injury, when the glass is broken.

### **8.4 Electric Shock**

- (1) Disconnect power supply before handling LCD module.
- (2) Do not pull or fold the LED cable.
- (3) Do not touch the parts inside LCD modules and the fluorescent LED's connector or cables in order to prevent electric shock.

### **8.5 Absolute Maximum Ratings and Power Protection Circuit**

- (1) Do not exceed the absolute maximum rating values, such as the supply voltage variation, input voltage variation, variation in parts' parameters, environmental temperature, etc., otherwise LCD module may be damaged.
- (2) Please do not leave LCD module in the environment of high humidity and high temperature for a long time.
- (3) It's recommended to employ protection circuit for power supply.

## **8.6 Operation**

- (1) Do not touch, push or rub the polarizer with anything harder than HB pencil lead.
- (2) Use fingerstalls of soft gloves in order to keep clean display quality, when persons handle the LCD module for incoming inspection or assembly.
- (3) When the surface is dusty, please wipe gently with absorbent cotton or other soft material.
- (4) Wipe off saliva or water drops as soon as possible. If saliva or water drops contact with polarizer for a long time, they may cause deformation or color fading.
- (5) When cleaning the adhesives, please use absorbent cotton wetted with a little petroleum benzene or other adequate solvent.

## **8.7 Mechanism**

Please mount LCD module by using mounting holes arranged in four corners tightly.

## **8.8 Static Electricity**

- (1) Protection film must remove very slowly from the surface of LCD module to prevent from electrostatic occurrence.
- (2) Because LCD modules use CMOS-IC on circuit board and TFT-LCD panel, it is very weak to electrostatic discharge. Please be careful with electrostatic discharge. Persons who handle the module should be grounded through adequate methods.

## **8.9 Strong Light Exposure**


The module shall not be exposed under strong light such as direct sunlight. Otherwise, display characteristics may be changed.

## **8.10 Disposal**

When disposing LCD module, obey the local environmental regulations.

## **8.11 Others**

Do not keep the LCD at the same display pattern continually. The residual image will happen and it will damage the LCD. Please use screen saver.




A Block

1	INC	21	LVP
2	VDD	22	GND
3	VDD	23	NC
4	VDD_EIO1	24	NC
5	SCD_EIO1	25	NC
6	SDA_EIO1	26	NC
7	NC	27	NC
8	LVDN	28	NC
9	LVP	29	CABC_EN
10	GND	30	NC
11	LVTN	31	NC
12	LVP	32	NC
13	GND	33	NC
14	LVTN	34	NC
15	LVP	35	BIST
16	GND	36	NC
17	LVTN	37	NC
18	LVDLKN	38	NC
19	LVDLKN	39	NC
20	LVTN	40	NC

**Note:**


1. Unless indicated, Tolerance " $\pm 0.5$ "

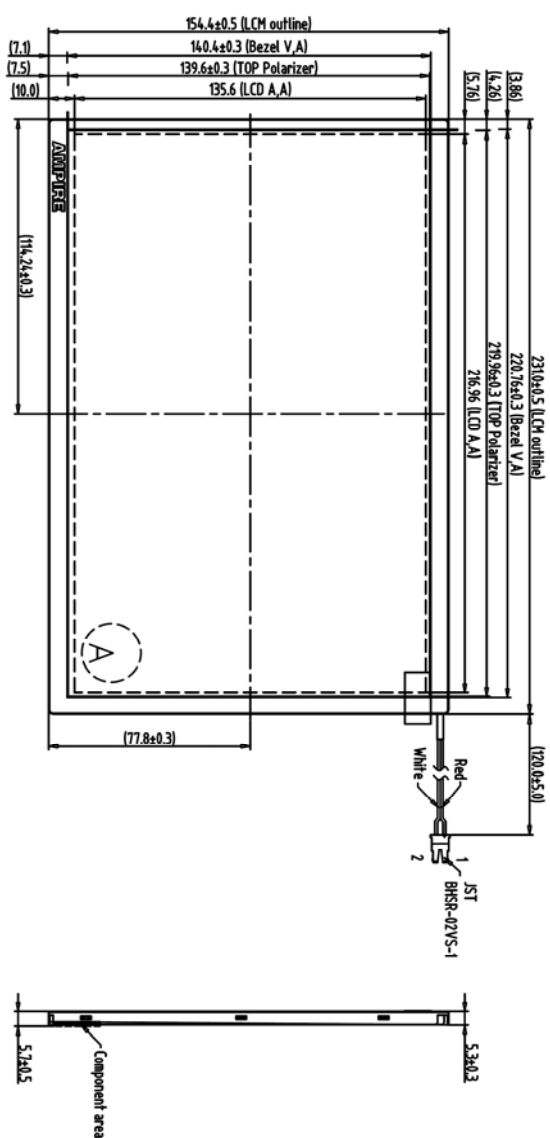

REV	REVISION RECORD	DATE NAME
0	NEW RELEASE	05-11-14EMILY
1	Modify interface pin23-25,27-28,31-33 to NC	07-16-14EMILY

1						TITLE 1 280800N1
2						(10.1")
3						DWG. NO. *140541MA
4						SHEET 1 OF 1
5						
6						
7	TOLENANCE GRADU(+)	A	B	DIM.	DWN.	DATE
8				MM	EMILY	05-14-14
9				IE NO.	CHEK.	DATE
10				PARTS NO.	LGM APPD.	DATE
11				1280800N1		
12						


REV	REVISION RECORD	DATE	NAME
0	NEW RELEASE	05-14-14	HEMILY
1	Modify interface pin23-25,27-28,31-33 to NC	07-16-14	HEMILY



A Block

CN1 ①

1	NC	21	LV3P
2	VDD	22	GND
3	VDD	23	NC
4	VDD_EDID	24	NC
5	SCL_EDID	25	NC
6	SDA_EDID	26	NC
7	NC	27	NC
8	LV0N	28	NC
9	LV0P	29	CABC_EN
10	GND	30	NC
11	LV1N	31	NC
12	LV1P	32	NC
13	GND	33	NC
14	LV2N	34	NC
15	LV2P	35	BRST
16	GND	36	NC
17	LVCLKN	37	NC
18	LVCLKP	38	NC
19	GND	39	NC
20	LV3N	40	NC

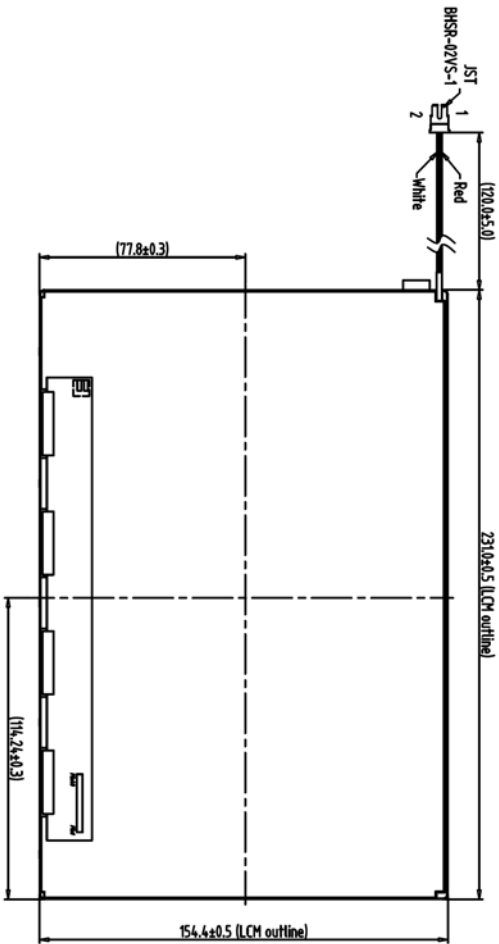

Back view


Note:

1. Unless indicated, Tolerance "±0.5"


1	7		TOLERANCE GRADE(F)	A	B	DIR.	MM	DWN.	EMILY	DATE	05-14-14	TITLE	1280800N1	DWG. NO.	*140542MA	SHEET	1 OF 1
2	8																
3	9																
4	10																
5	11																
6	12																

AMPIRE 晶采光電科技

10. LED DRIVER BOARD MECHANICAL DRAWING

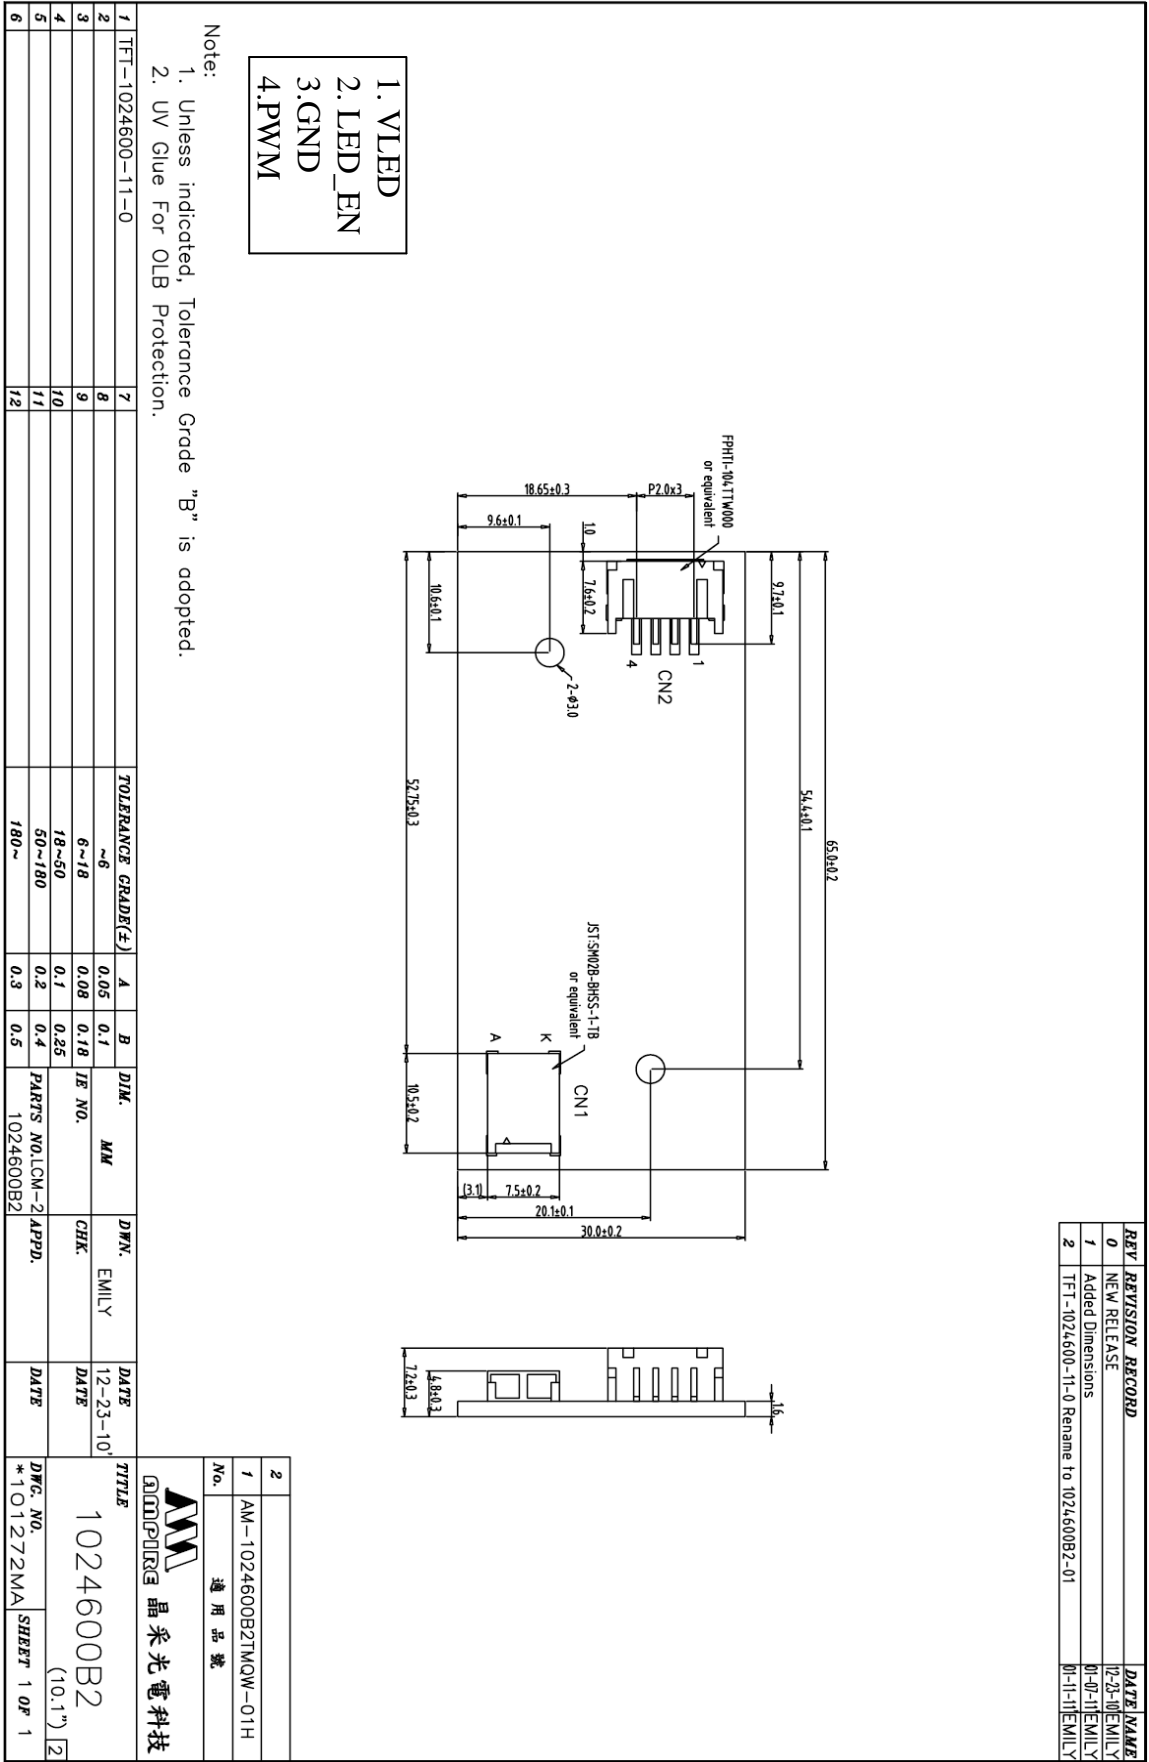

## 11. LED DRIVER BOARD PCB DRAWING

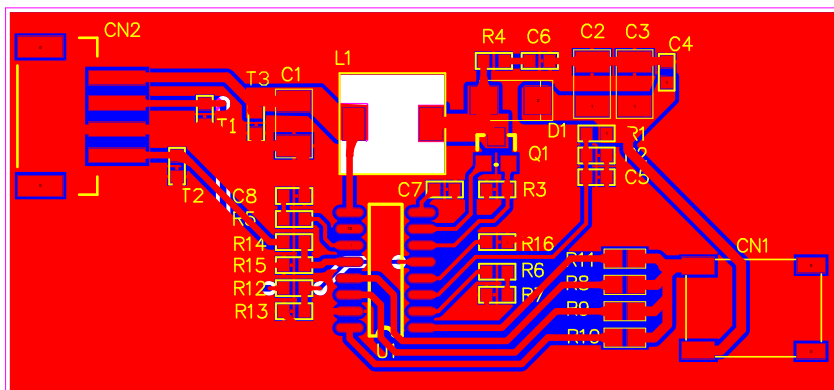

12. PACKING DRAWING

REV	REVISION RECORD	DATE	NAME
0	NEW RELEASE	09-17-09	SNOW
1	Rename TF800600-41-0 to 800600L-TD0	10-07-09	SNOW
2	取消天地板	08-28-11	SNOW

Note:

1. Bag = 1 PCS LCM

2. Big Box = 1x 25 = 25 PCS LCM

1	TF800600-41-0	7		TOLERANCE GRADE(±)	A	B	DIM.	MM	DWN.	SNOW	DATE	09-17-09
2		8					TE NO.		CHK.		DATE	
3		9					PARTS NO.	Packing	APPD.		DATE	
4		10					800600L-TD0					
5		11										
6		12										

**AM**  
AMPIRE 晶采光電科技

TITLE  
800600L-TD0  
(10.4")

DWG. NO.  
\*O90935SB

SHEET  
1 OF 1