

Features

- 17" Industrial Compact Size Panel PC
- Flat front panel touch screen
- Fanless design
- Intel 4th Gen. Core i3 CPU built-in
- Onboard 4GB DDR 3L 1600 MHz/8GB(option)
- DC 9~36V wide ranging power input
- IP65 compliant front panel
- Optional projected capacitive touch screen support 7H anti-scratch surface

Specifications

System

CPU	Onboard Intel 4th Gen. Core i3 CPU Processors
System Chipset	SoC

IO Port

USB	2 x USB 3.0 type A
Serial/Parallel	1 x RS-232/422/485 DB-9, COM1, Default RS-232 1 x RS-232 DB-9, COM2
Audio	1 x Audio Line Out
LAN	2 x GbE LAN RJ-45
HDMI	1 x HDMI Port (reserved, no printing)
Power	1 x 3-pin DC Power input terminal 1 x 2-pin connector for power on/off button
Option	2 x RS-232 DB-9 + 1 x Mini-PCle slot via TB-528C2ME1 2 x CAN bus via TB-528CAN2 2 x USB 2.0 type A + 1 x Mini-PCle slot + 1xRS-232 DB-9 via TB-528C1U2P1 2 x USB 2.0 type A + via TB-528U2

Storage Space

HDD	1 x 2.5" SATA HDD bay for SATA HDD (Easy Accessible)
Movable device	1 x SD card slot, up to 32GB

Expansion

Expansion Bus	1 x Internal Mini-PCle slot full size
---------------	---------------------------------------

Display

Display Type	17" TFT-LCD
Max. Resolution	1280x1024
Max. Color	16.7M
Contrast Ratio	1000 : 1
Luminance (cd/m ²)	350
View angle(H°/V°)	H:170° / V:160°
Backlight Lifetime (Hrs)	30,000 hrs

Touch screen - Resistive Touch Window Type


TS Control IC	PenMount 6000 on Board
Interface	Default USB interface Optional RS-232 Interface
Light Transmission(%)	Over 80%

Touch Screen - Projected Capacitive Type

TS Control IC	Chip on tail
Interface	USB interface
Light Transmission(%)	Over 90%



Dimensions

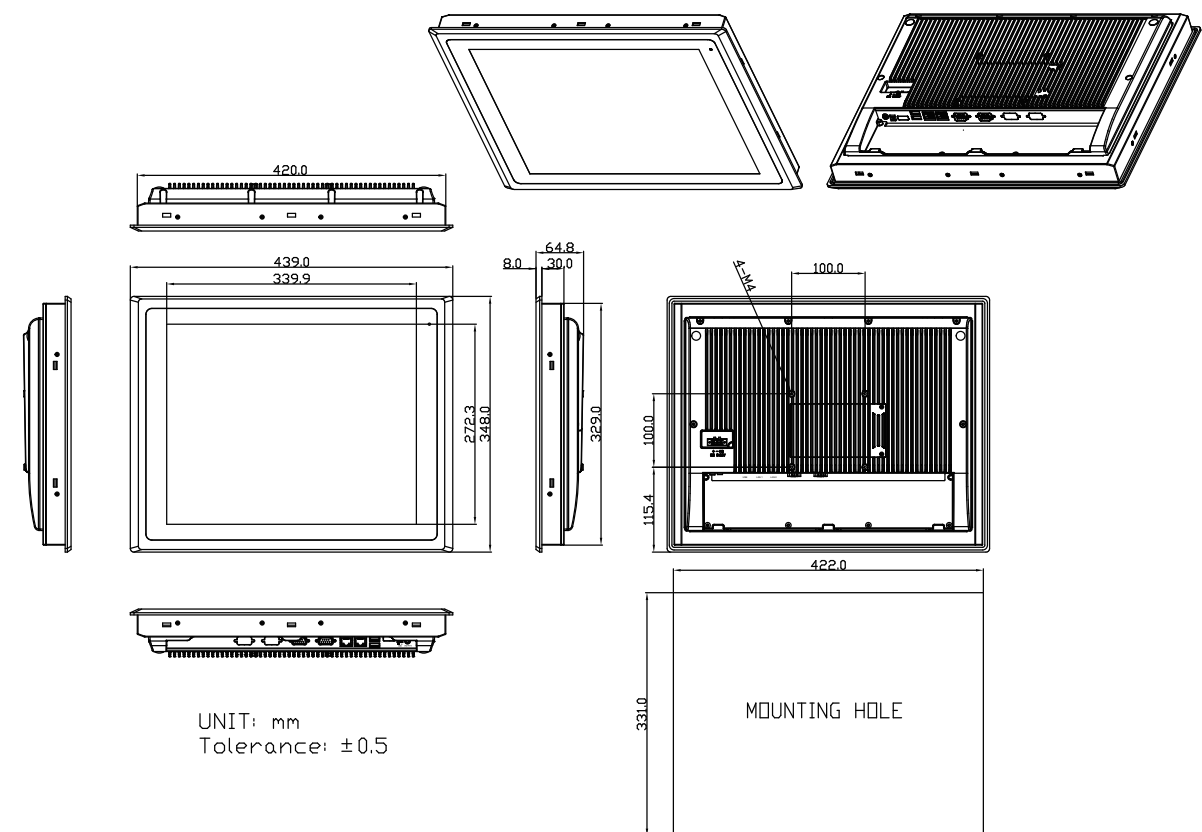

Power

Power Input	9~36V DC
Power Consumption	39.6W

Mechanical

Front Bezel	Flat Bezel design
Front Bezel Metal	Aluminum / Panel Mounting
Rear Panel Metal	Aluminum / VESA 100
Dimensions (WxHxD)	439mm x 348mm x 64.8mm
IP Rating	IP65 compliant front panel
Net Weight (Kgs)	6.3 Kgs

Environmental

Operating Temperature	0~50°C
Storage Temperature	-20~60°C
Storage Humidity	10 to 90%@ 40°C, non-condensing
Certificate	Meet CE / FCC

Operating System Support

Windows 7 64-bit, WES 7, Window 8, WES 8, Window 8.1

Distributed by:



The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com