

Distributed by:



[www.texim-europe.com](http://www.texim-europe.com)

Datasheet

# CFast 3ME series

- SATA III interface
- Extremely low power consumption
- iSMART disk health monitoring
- Intelligent error recovery system
- Excellent data transfer speed
- Hardware write protect
- Enhanced power cycling management



## Introduction

The Innodisk CFast 3ME operates at SATA III 6.0 Gb/s, which offers data transfer rate of read up to 310MB/sec. and of sequential write up to 150MB/s. Compliant with CFast 2.0 standard, it is designed with 7+17 pin connector and is SATA compatible. Due to the idle power saving, it reduces 30% power consumption. CFast 3ME is featured as small form factor, and suitable for most industrial application.


CFast 3ME can work under harsh environment, and complies with ATA protocol. Without additional drives, the disk can be configured as a boot device or data storage device. CFast 3ME support hardware write protect to prevent modification of valuable data on a device. Besides, through Innodisk's enhanced power cycling technology and more capacitors, CFast 3ME prevents data loss caused by sudden power failure. By using Innodisk's iSMART, users can not only monitor the operation status of SSD, but also visualize Wear-Leveling status with graphics.

# CFAST 3ME<sub>series</sub>

## Drawing

Contact us for more information  
about the CFAST 3ME

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

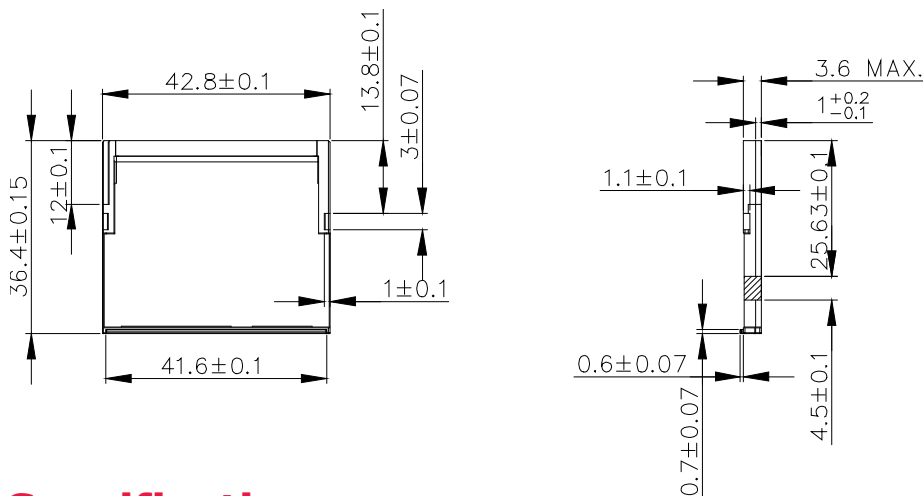

## Specifications

### Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd.,  
Xizhi Dist., New Taipei City 221,  
Taiwan (R.O.C.)

Tel: +886-2-77033000  
Email: sales@innodisk.com

### Branch Offices:

USA  
[usasales@innodisk.com](mailto:usasales@innodisk.com)  
+1-510-770-9421

Europe  
[eusales@innodisk.com](mailto:eusales@innodisk.com)  
+31-040-282-1818

Japan  
[jpsales@innodisk.com](mailto:jpsales@innodisk.com)  
+81-45-594-7581

China  
[sales\\_cn@innodisk.com](mailto:sales_cn@innodisk.com)  
+86-755-21673689

[www.innodisk.com](http://www.innodisk.com)

© 2014 Innodisk Corporation.  
All right reserved. Specifications  
are subject to change without  
prior notice.

20140820

|                               |   |
|-------------------------------|---|
| Interface                     | SATA III  |
| Flash Type                    | MLC   |
| P/E Cycle limit               | 3,000   |
| Capacity                      | 4GB~128GB   |
| Max. Channels                 | 2   |
| Sequential R/W (MB/sec, max.) | 310/150   |
| Max. Power Consumption        | 1.1W  |
| Thermal Sensor                | ST- optional/ WT- default   |
| External DRAM Buffer          | -   |
| H/W Write Protect             | √   |
| ATA Security                  | √   |
| S.M.A.R.T.                    | √   |
| Dimension (WxLxH)             | 42.8X 36.4 X 3.6 mm   |
| Environment                   | Vibration: 20G @7~2000Hz<br>Shock: 1500G @ 0.5ms<br>Storage Temperature: -55°C ~ +95°C<br>MTBF: 3 million hours |

## Ordering Information

| Operation Temp.                     | 4GB               | 8GB               | 16GB              | 32GB              | 64GB              | 128GB             |
|-------------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Standard Grade<br>(0°C ~ +70°C)     | DECFA-04GD07RC2SC | DECFA-08GD07RC2SC | DECFA-16GD07RC2DC | DECFA-32GD07RC2DC | DECFA-64GD07RC2DC | DECFA-A28D07RC2DC |
| Industrial Grade<br>(-40°C ~ +85°C) | DECFA-04GD07SW2SC | DECFA-08GD07SW2SC | DECFA-16GD07SW2DC | DECFA-32GD07SW2DC | DECFA-64GD07SW2DC | DECFA-A28D07SW2DC |

**innodisk**

[www.innodisk.com](http://www.innodisk.com)

## The Netherlands



Elektrostraat 17  
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33  
F: +31 (0)53 573 33 30  
E: [nl@texim-europe.com](mailto:nl@texim-europe.com)

## Belgium



Zuiderlaan 14 bus 10  
B-1731 Zellik

T: +32 (0)2 462 01 00  
F: +32 (0)2 462 01 25  
E: [belgium@texim-europe.com](mailto:belgium@texim-europe.com)

## UK & Ireland



St. Mary's House, Church Lane  
Carlton Le Moorland  
Lincoln LN5 9HS

T: +44 (0)1522 789 555  
F: +44 (0)845 299 22 26  
E: [uk@texim-europe.com](mailto:uk@texim-europe.com)

## Germany North



Bahnhofstrasse 92  
D-25451 Quickborn

T: +49 (0)4106 627 07-0  
F: +49 (0)4106 627 07-20  
E: [germany@texim-europe.com](mailto:germany@texim-europe.com)

## Germany South



Martin-Kollar-Strasse 9  
D-81829 München

T: +49 (0)89 436 086-0  
F: +49 (0)89 436 086-19  
E: [germany@texim-europe.com](mailto:germany@texim-europe.com)

## Austria



Warwitzstrasse 9  
A-5020 Salzburg

T: +43 (0)662 216 026  
F: +43 (0)662 216 026-66  
E: [austria@texim-europe.com](mailto:austria@texim-europe.com)

## Nordic region



Sdr. Jagtvej 12  
DK-2970 Hørsholm

T: +45 88 20 26 30  
F: +45 88 20 26 39  
E: [nordic@texim-europe.com](mailto:nordic@texim-europe.com)

## General information



[info@texim-europe.com](mailto:info@texim-europe.com)  
[www.texim-europe.com](http://www.texim-europe.com)