


ECM-QM87

4th Gen Intel®Core™ Processor i7/i5/i3 3.5" Micro Module with Intel® QM87 Chipset

- > Onboard 4th Gen Intel®Core™ i7/i5/i3 BGA Processor
- > One 204-pin DDR3L SODIMM Up to 8GB DDR3 1333/ 1600 SDRAM
- > Dual-channel 18/ 24-bit LVDS, HDMI, VGA
- > Triple Display
- > 2 SATA III, 1 Mini PCIe Card (Support mSATA)
- > 6 USB 3.0, 2 USB 2.0, 2 COM, 8-bit DIO
- > iAMT 9.0

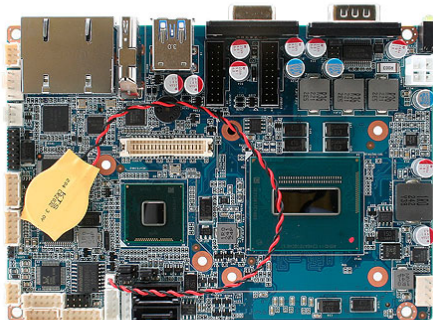

+ Spec

System	
Processor	4th Gen Intel® Core™ i7-4700EQ 4-Core 3.4GHz processor 4th Gen Intel® Core™ i5-4400E, 2-Core, 2.7GHz processor 4th Gen Intel® Core™ i3-4102E, 2-Core, 1.6GHz processor
System Chipset	Intel® QM87 Express Chipset
System Memory	1 x 204-Pin DDR3L 1333MHz SO-DIMM up to 8 GB or 1 x 204-Pin DDR3 1600MHz SO-DIMM up to 8 GB
I/O Chip	EC ITE IT8518E
BIOS	AMI uEFI BIOS, 128Mbit SPI Flash ROM
Watchdog Timer	H/W Reset: 1sec. ~ 65535sec./min. and 1sec. or 1min./step
H/W Status Monitor	Monitoring System Temperature and Voltage with Auto Throttling Control
Expansion	
Expansion	1 x Mini PCIe Supports mSATA
Storage	
Storage	1 x mSATA Supported from Mini PCIe
I/O	
USB	2 x USB 2.0 6 x USB 3.0
SATA	2 x SATA III
COM Port	1 x RS-232/422/485 1 x RS-232
DIO	1 x 8bit GPIO
MIO	1 x LPC
Display	
Chipset	Intel® QM87 Chipset Integrated Supports triple display
Resolution	VGA:Max. resolution 1920x1200@ 60Hz HDMI:Max. resolution 3840x2160@ 24Hz LVDS:Max. resolution 1920x1080@ 60Hz VGA + LVDS + HDMI Dual-channel 18/ 24-bit LVDS
Audio	
Chipset	Realtek ALC892 supports 5.1-CH
Audio Interface	Mic-In, Line-In and Line-Out
Ethernet	
Chipset	1 x Intel® I210AT 1 x Intel® I217LM
Ethernet Interface	10/100/1000 Base-Tx GbE compatible
LAN Port	2 x RJ-45
Mechanical & Environmental	
Power Requirement	+12V
ACPI	Single Power ATX Support S0, S3, S4, S5 ACPI3.0 Compliant
Power Type	AT/ATX
Operating Temp	0°C ~ 60°C (32°F ~ 140°F)
Storage Temp	-40°C ~ 75°C (-40°F ~ 167°F)
Operating Humidity	0% ~ 90% Relative Humidity, Non-condensing
Dimension (L x W)	5.7" x 4" (146mm x 101mm)
Weight	0.44lbs (0.2kg)
Certifications	



Certification Information	CE FCC Class B
Software Support	
OS Information	Win 8 Win 7 Linux

Ordering

ECM-QM87-4700-A1R
3.5"W/i7 4700EQ/QM87/6USB3.0/2COM/A1

ECM-QM87-4400-A1R
3.5" W/i5 4400E/QM87/6USB3.0/2COM/A1

ECM-QM87-4102-A1R
3.5" W/i3 4102E/QM87R/6USB3.0/2COM/A1

The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com