

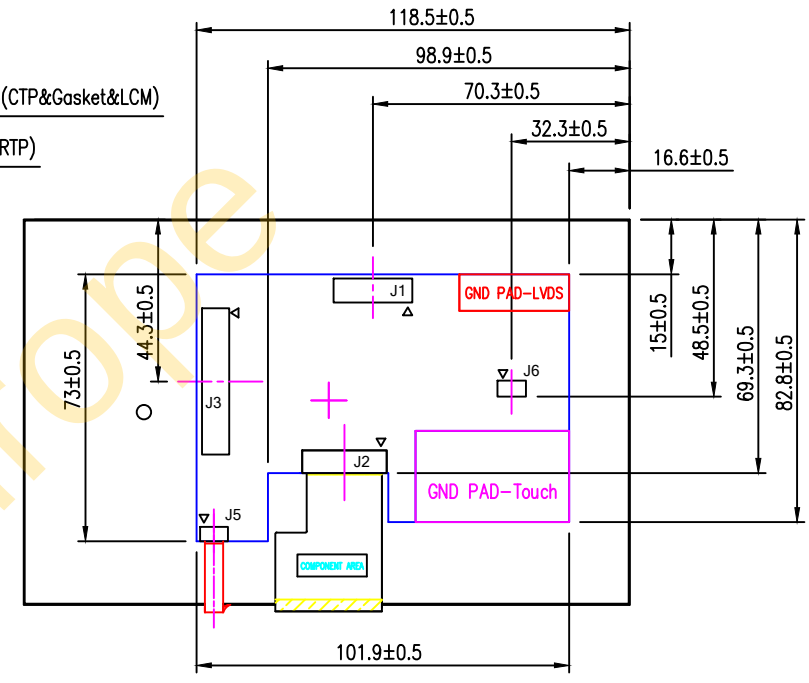


A
B
C
D
E
F

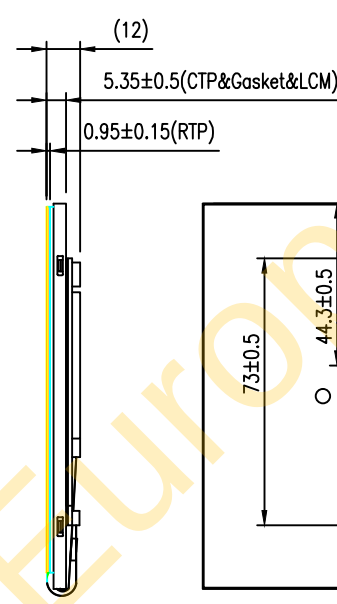

Distributed by:

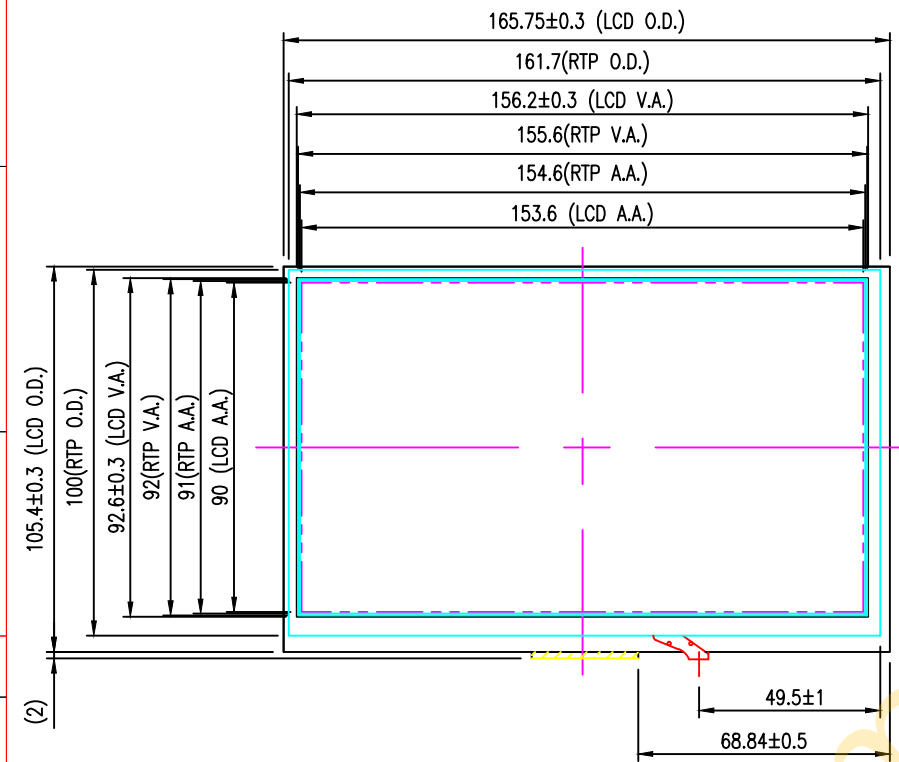

- Note:
1. Tolerance: ±0.3mm
 2. Original brightness: 500 cd/m² (Typ.)
 3. The bending radius of FPC should be larger than 1.0mm.
 4. LCD Resolution : 1024x600
 5. J1 LVDS connector type for FFC cable : Starcon 089H30-000100-G2-C or equivalent
 6. J3 LVDS connector type for Cable : Starcon 093G30-0001A-M4 or equivalent

J1 & J3 Pin Define

Pin No.	Symbol	Pin No.	Symbol	Pin No.	Symbol
Pin 1	VCC3	Pin 11	RX1+	Pin 21	GND
Pin 2	VCC3	Pin 12	GND	Pin 22	LR
Pin 3	A-Dim	Pin 13	RX2-	Pin 23	UD
Pin 4	D-Dim	Pin 14	RX2+	Pin 24	LED_VCC
Pin 5	BK_EN	Pin 15	GND	Pin 25	LED_VCC
Pin 6	SEL6/8	Pin 16	RXC-	Pin 26	Y2
Pin 7	RX0-	Pin 17	RXC+	Pin 27	X2
Pin 8	RX0+	Pin 18	GND	Pin 28	Y1
Pin 9	GND	Pin 19	RX3-	Pin 29	X1
Pin 10	RX1-	Pin 20	RX3+	Pin 30	NC

Customer Approval		Part Number		DSAM-FLT07X0TH02KIT1			
Date	Rev.	Date	Person	Description			
Company	01	20160720	Kevin	Correct Pin#1 define and add TP Pin define			
Name	02	20160830	Kevin	Correct resolution in note			
Signature	03	20160921	Kevin	Update LCD Brightness info in Note			
First Drawing	Date	Date	Design By	Date	Check By	Date	Approved By