



Distributed by:

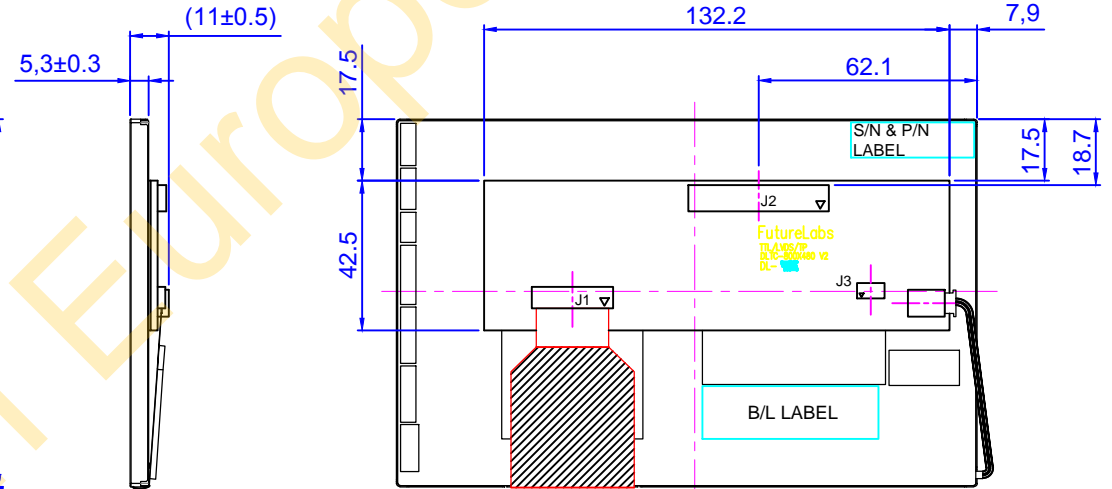

Front VIEW

Back VIEW

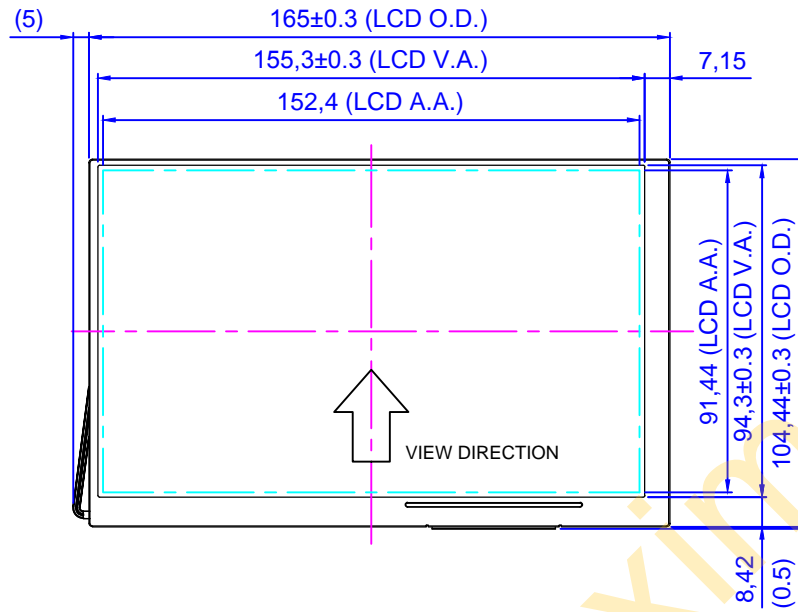

Note:

1. Tolerance: $\pm 0.3\text{mm}$
2. Resolution : 800x480
3. Center Brightness : 400cd/m^2 (Min.), 500cd/m^2 (Typ.)
4. J2-LVDS connector type : Starcon 093G30-0001A-M4 or equivalent

J2 Pin Define

Pin No.	Symbol	Pin No.	Symbol	Pin No.	Symbol
Pin 1	NC	Pin 11	NC	Pin 21	GND_2
Pin 2	NC	Pin 12	NC	Pin 22	RXCK -
Pin 3	NC	Pin 13	RXE 0-	Pin 23	RXCK +
Pin 4	NC	Pin 14	RXE 0+	Pin 24	GND_2
Pin 5	NC	Pin 15	GND_2	Pin 25	RXE 3-
Pin 6	GND_2	Pin 16	RXE 1-	Pin 26	RXE 3+
Pin 7	VCC3	Pin 17	RXE 1+	Pin 27	GND_2
Pin 8	VCC3	Pin 18	GND_2	Pin 28	NC
Pin 9	LED_BKON	Pin 19	RXE 2-	Pin 29	LED_VCC
Pin 10	LED_DIMM	Pin 20	RXE 2+	Pin 30	LED_VCC

Customer Approval		Part Number		FLT-0700H3ETTXCHM5TC			
Date	Rev.	Date	Person	Description			
	01	0513	Kevin	Add Connector Information			
Company	02	0516	Kevin	Add Connector Pin direction			
Name	03	0616	Kevin	Add Pin define Table			
Signature	Date	Date	Design By	Date	Check By	Date	Approved By
	First Drawing	20160511	K.W.				