

IPS215-4POE

4-port 10/100M Base-T(x) PoE + 1-port 10/100M Base-T(x)

Unmanaged Industrial PoE Switch

Features

1. Support 4 10/100Base-TX POE ports and 1 10/100Base-TX Ethernet port
2. Support IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3af/at, store and forward
3. Support IEEE802.3af standard, full-port (PoE) full 15.4W power supply
4. Support IEEE802.3at standard, single-port maximum 30W power supply.
5. 4 Fast Ethernet port (1~4) support POE function
6. Ethernet port support 10/100M self-adaption
7. DC48V power input, reverse connection protection
8. IP40 protect grade, high strength iron shell, DIN Rail installation
9. Industrial grade 4 design



Introduction


The IPS215-4POE switch is a kind of unmanaged industrial PoE switch, it support 5 10/100Base-T(X) ports. The 4 Fast Ethernet port (1~4) support Power-over Ethernet (PoE) function. The switches are classified as power source equipment (PSE), and when used in this way, the IPS215-4POE switches enable centralization of the power supply, providing up to 30 watts of power per port and reducing the effort needed for installing power. The switches can be used to power IEEE802.3af/at standard devices (PD), eliminating the need for

additional wiring.

It support CE, FCC standard, IPS215-4POE adopt industry standard design, IP40 protection, rugged high-strength metal case, power supply input (48VDC). The switch support IEEE802.3/ IEEE802.3u/ IEEE802.3x with 10/100M, full/half-duplex, and MDI/MDI-X auto-sensing, providing reliable and economic solution for your industrial Ethernet network.

Dimension

Unit (mm)

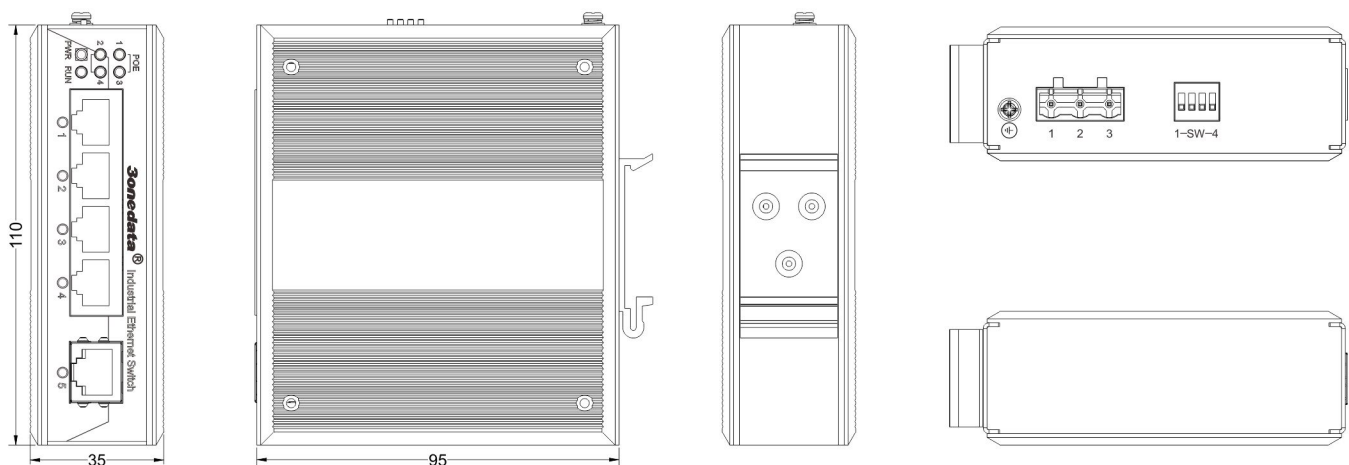

Specification

Technology

Standard: Support IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3af/at

Flow control: IEEE802.3x flow control, back press flow control

Exchange attribute

100M forward speed: 148810pps

Transmit mode: store and forward

MAC address table: 2K

Bandwidth: 2.0G

Interface

RJ45 port: 10Base-T/100Base-TX/1000Base-TX Self-adaption, Half/full duplex and MDI/MDI-X auto detect

POE Pin-out: 1/2(+), 3/6(-)

Transfer distance

Twisted cable: 100M (standard CAT5/CAT5e cable)

LED indicator

Interface indicator: Link (1~5)

Power supply indicator: PWR

Run indicator: Run

PoE indicator: POE(1~4)

Power supply

Input Voltage: 48VDC (45~55VDC)

Type of input: 3 bits terminal block

Un-load consumption: 2.26W@48VDC

Full-load consumption: 73.97W@48VDC

Single PoE port maximum consumption: 30W@48VDC

Working environment

Working temperature: -40~75°C

Storage temperature: -40~85°C

Relative Humidity: 5%~95 % (no condensation)

Mechanical Structure

Shell: IP40 protect grade, metal shell

Installation: DIN-Rail

Weight: 370g

Size (W×H×D): 35mm×110mm×95mm

Industry Standard

EMI: FCC Part 15, CISPR (EN55022) class A

EMS: EN61000-4-2 (ESD), Level 3

EN61000-4-4 (EFT), Level 3

EN61000-4-5 (Surge), Level 2

Shock: IEC 60068-2-27

Free fall: IEC 60068-2-32

Vibration: IEC 60068-2-6

Certification

CE, FCC, RoHS, UL508 (Pending)

Warranty: 5 years

Packing List

1. Industrial PoE Switch (plus terminal block) × 1
2. User manual × 1
3. Certificate of quality × 1
4. Warranty card × 1
5. DIN-Rail mounting kit × 1

Distributed by:



www.texim-europe.com

The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com