

A

B

C

D

E

F

A


B

C

D

E

F

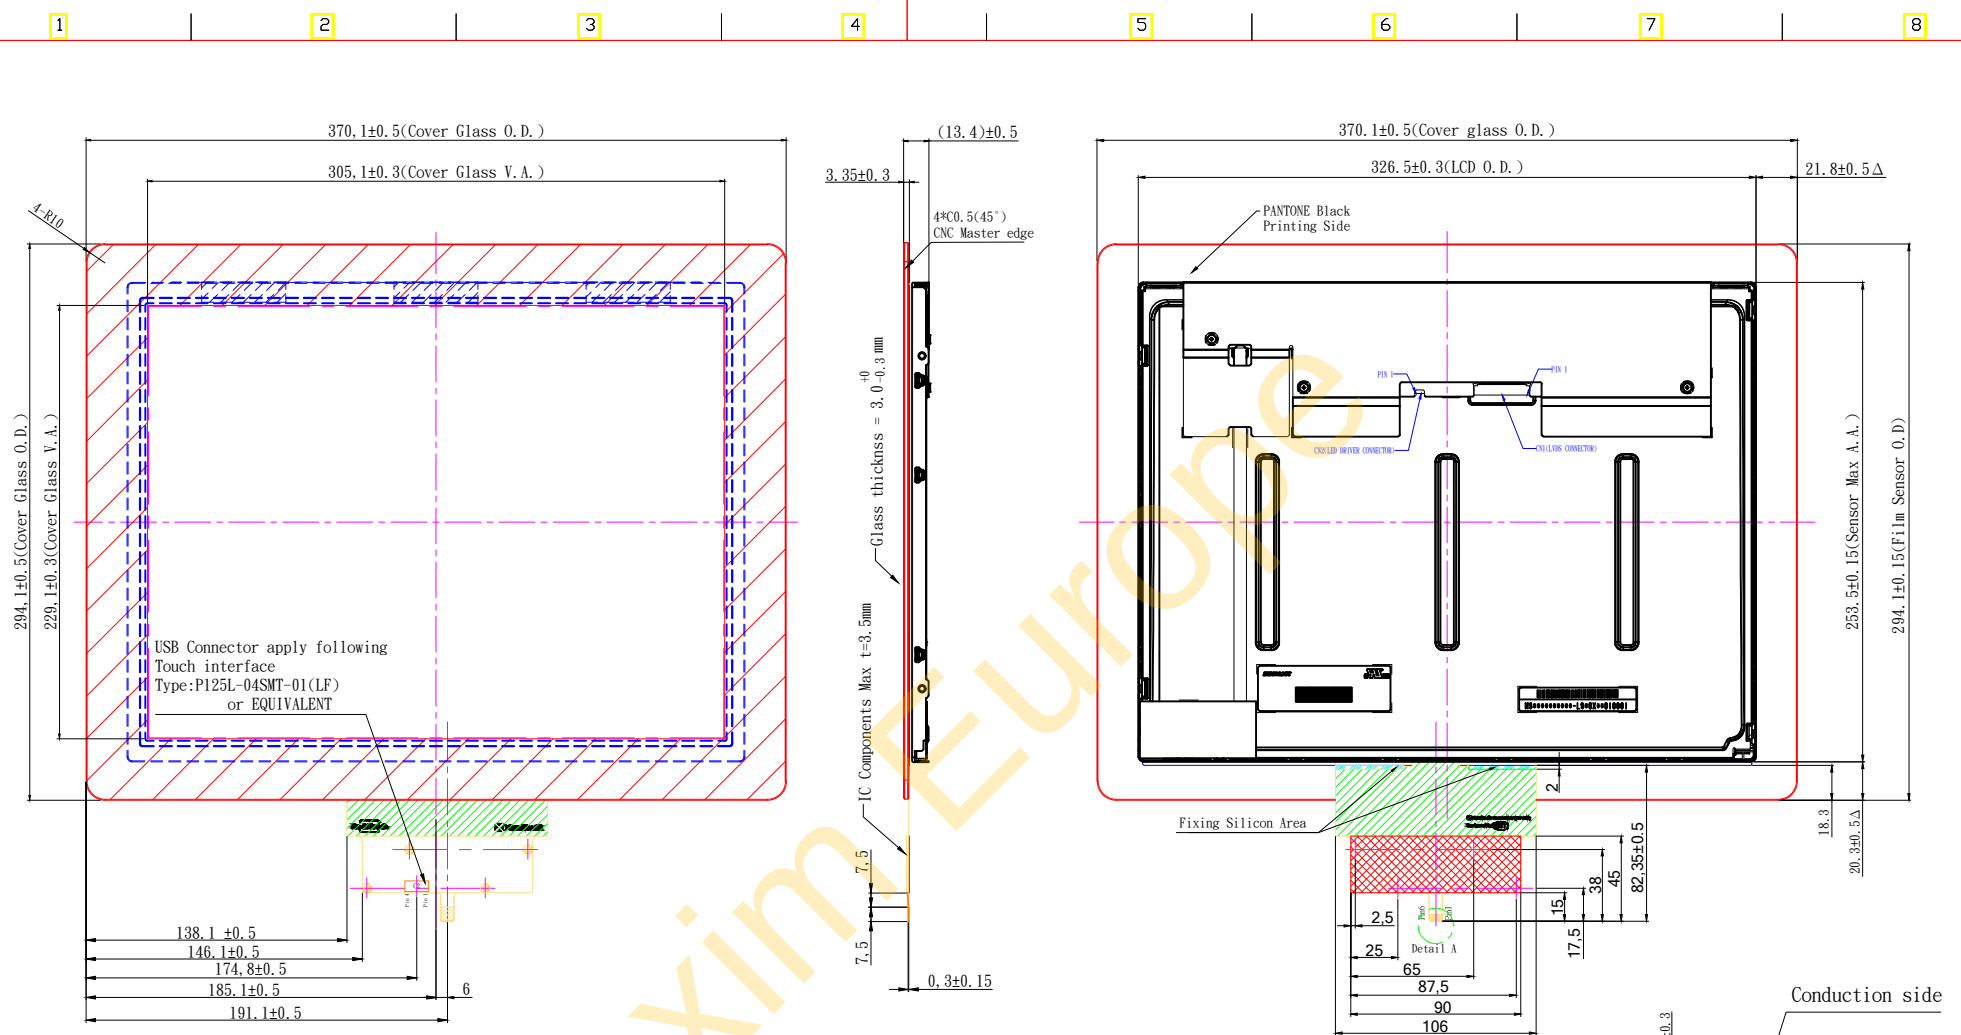

Note:


1. Tolerance: ± 0.5 mm
2. Touch finger input or special conductive pen
3. Touch Surface Hardness: 6H (Semi-Tempered Glass)
4. Touch Transmittance: $> 85\%$ (JIS-K7105)
5. Touch Surface Treatment: None
6. Distance between LCD and touch panel need to be minimum 1.0 mm otherwise touch maybe will not work correctly
7. If customer put a front cover all around need use at least 2 mm thick gasket between touch and metal frame
8. USB max ripple acceptable is 50 mV, in other case touch will not work correctly
9. Referring to the integration guide to avoid any integration noise issue
10. LCD model : FLC-150GML2000SA1
11. Touch model : RTPC150-H30BP1-U
12. Assembly Solution : DSA

Distributed by:



C1:USB Interface	
Pin 01	GND
Pin 02	D-
Pin 03	D+
Pin 04	VDD
Pin 05	NC
Pin 06	RST

C2:Pin Define for USB 4 pin	
Pin 01	GND
Pin 02	D-
Pin 03	D+
Pin 04	VDD

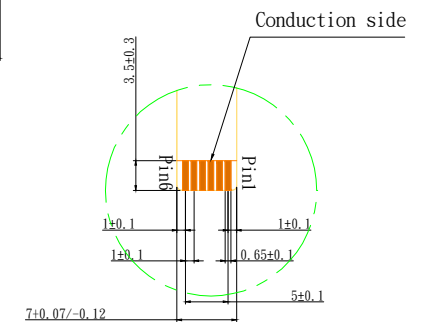

Detail A

Customer Approval		Part Number		FLD-150GML20PUSA1	
Date		Rev. Date	Person	Description	
Company					
Name					
Signature		Date	Design By Date	Check By Date	Approved By
		First Drawing 20171106	Kevin		

