




KN 19

Kurzhub-Netzschalter 2-polig
short travel main switch 2-pole

→ Allgemein / general information

Baureihe / series	KN 19
Typ Bezeichnung / type description	Kurzhubnetzschalter 2-polig / short travel main switch 2-pole
Beleuchtbar / illuminable	möglich / possible (max. 3 mm LED)

→ Einbaumaßen / Dimensions


Einbauhöhe / mounting height	9.7 mm
Länge / length	37.8 mm
Breite / width	18.8 mm
Höhe / overall height	12.7 mm
Raster / key grid	19.05 x 38.1 mm

→ Elektrische Angaben / electrical data

Schaltleistung max. / switching power max.	250 W DC
Schaltspannung min. / switching voltage min.	12 V AC / DC
Schaltstrom max. / switching current max.	6A AC / 5 A DC

→ Sonstige Angaben / other specifications

Befestigung / mounting	Löten / soldering
Anschluss / terminal	THT
Kontakte / contacts	2Ö + 2S / 2NC + 2NO
Kontaktwerkstoff / contact material	Ag
Betätigungskraft max. / operating force max.	14 N +/- 3 N
Betätigungsweg / operation travel	0.55 +/- 0.15 mm
Betriebstemperatur / operating temperature	-25 °C to +70 °C
Lagertemperatur / storage temperature	-40 °C to +70 °C
Lebensdauer AC / operating life AC	100.000 (6 A / 250 V)
Lebensdauer DC / operating life DC	50.000 (5 A / 50 V)
Schutzart frontseitig / degree of protection from front side	IP40
Löttemperatur max. / soldering temperature max.	350 °C
Lötdauer max. / soldering time max.	3 sec
ROHS konform / compliant	Ja / yes
REACH konform / compliant	Ja / yes

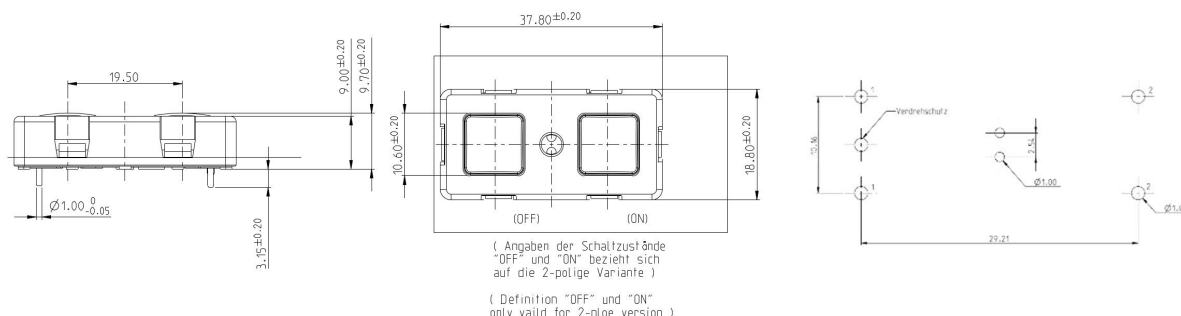

The information in this data sheet only contains general descriptions and / or performance features, which may not apply precisely as described to the respective application, and which may change due to further product enhancements. The technical data, illustrations and other information about our products are the mere results of individual technical testing. These descriptions and other product features are only binding if they expressly agreed upon at the time of the conclusion of a binding contract. In all other cases, we reserve the right to make technical changes as well as changes of availability. Pictures and other graphic illustrations are approximations only. All product names may be trademarks or brand names of the RAFI Group or any other sub-supplier of RAFI. The use of such by any third parties for their own purposes may infringe the rights of the respective entity holding those rights.

The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

Italy



Via Matteotti 43
IT-20864 Agrate Brianza (MB)

T: +39 (0)395 967 226
F: +39 (0)395 967 226
E: italy@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com