

FEATURES

- ▶ Ultra Compact Size 1.0 x 1.0 x 0.64"
- ▶ Fully Encapsulated Plastic Case for PCB and Chassis Mounting Version
- ▶ Universal Input 85-264VAC
- ▶ Protection Class II as per IEC/EN 60536
- ▶ I/O Isolation 3000VAC with Reinforced Insulation
- ▶ No Min. Load Requirement
- ▶ Operating Ambient Temp. Range -25°C to +70°C
- ▶ Overload/Voltage and Short Circuit Protection
- ▶ EMI Emission EN 55032/14-1 Class B & FCC Level B Approved
- ▶ EMC Immunity EN 61000-4-2,3,4,5,6,8,11 Approved
- ▶ Eco Design, No Load Input Power 300mW max.
- ▶ Safety Approval to UL/cUL/IEC/EN 62368-1(60950-1), TUV IEC/EN 60335-1 & CE Marking



PRODUCT OVERVIEW

The AAF-05 Series from MINMAX is a range of ultra-small, fully encapsulated 5 Watt AC-DC power supply modules. They are designed for easy PCB mounting with solder pins. The modules feature EMI emission EN 55032/14-1 class B approved. EMC immunity complies with EN 61000-6-1. The low stand-by power consumption complies with European ErP Directive 2009/125/EC.

Universal input voltage range of 85-264VAC and an International safety approval package qualifies these power modules for worldwide markets.

The AAF-05 power supplies provide a superior solution for space critical applications in consumer appliances and instrumentation and communication equipment.

Model Selection Guide

Model Number	Output Voltage VDC	Output Current		Input Current @Max. Load mA(typ.)	Max. Capacitive Load μF	Efficiency (typ.) @Max. Load %
		Max. mA	Peak ₍₁₎ mA			
AAF-05S03	3.3	1515	1970	117	2200	74
AAF-05S05	5	1000	1300	108	1000	80
AAF-05S09	9	555	721	106	300	82
AAF-05S12	12	416	540	106	160	82
AAF-05S15	15	333	433	104	100	83
AAF-05S24	24	208	270	104	43	83
AAF-05S48	48	104	135	102	10	85

Input Specifications

Parameter	Conditions / Model	Min.	Typ.	Max.	Unit
Input Voltage Range	All Models	85	---	264	VAC
Input Frequency Range		47	---	63	Hz
Input Voltage Range		120	---	370	VDC
No-Load Power Consumption		---	---	300	mW
Inrush Current (Cold Start at 25°C)	115VAC	---	---	20	A
	230VAC	---	---	40	A

Output Specifications

Parameter	Conditions / Model	Min.	Typ.	Max.	Unit
Output Voltage Accuracy		---	---	±2.0	%Vnom.
Line Regulation	Vin=Min. to Max. @Full Load	---	---	±1.0	%
Load Regulation	Io=0% to 100%	---	---	±1.0	%
Ripple & Noise	0-20 MHz Bandwidth				
	3.3V & 5VDC Output Models	---	---	60	mV _{PP} of Vo
	Other Output Models	---	---	1	%V _{PP} of Vo
Minimum Load	No minimum Load Requirement				
Over Voltage Protection	Zener Diode Clamp	---	125	190	% of Vo
Temperature Coefficient		---	---	±0.05	%/°C
Overshoot		---	---	5	%Vout
Over Load Protection	Foldback, auto-recovery	135	150	---	%Inom.
	(long term overload condition may cause damage)				
Short Circuit Protection	Hiccup mode, Automatic Recovery				

General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds	3000	---	---	VACrms
I/O Isolation Resistance	500 VDC	100	---	---	MΩ
Switching Frequency		---	65	---	kHz
Hold-up Time	115VAC, Full Load	---	8	---	ms
	230VAC, Full Load	---	40	---	ms
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	520,000	---	---	Hours
Protection Class II	According IEC/EN 60536				
Safety Approvals	UL/cUL 60950-1 recognition (UL certificate), IEC/EN 60950-1 (CB-report)				
	UL/cUL 62368-1 recognition (UL certificate), IEC/EN 62368-1 (CB-report)				
	IEC/EN 60335-1 recognition (CB-report, TUV certificate)				

EMC Specifications

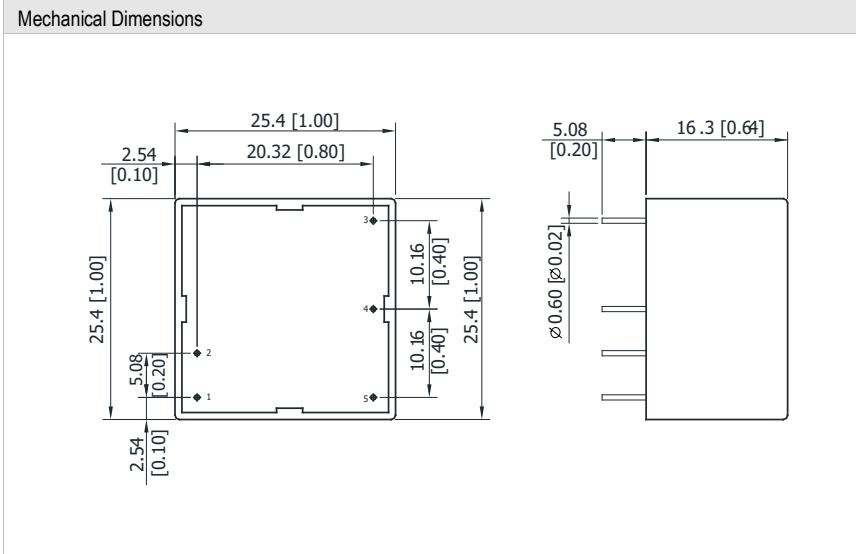
Parameter	Standards & Level	Performance	
EMI	Conduction & Radiation Class B without any external components EN 55014-1, EN 55032, FCC part 15	Class B	
EMS	EN 55014-2, EN 55024		
	ESD	EN 61000-4-2 Air ± 8kV, Contact ± 4kV	A
	Radiated immunity	EN 61000-4-3 10V/m	A
	Fast transient	EN 61000-4-4 ±2kV	A
	Surge	EN 61000-4-5 ±1kV	A
	Conducted immunity	EN 61000-4-6 10Vrms	A
	PFMF	EN 61000-4-8 30A/m	A
	Dips	EN 61000-4-11 30% 10ms	A
Interruptions	EN 61000-4-11 >95% 5000ms	B	

Environmental Specifications

Parameter	Conditions	Min.	Max.	Unit
Operating Ambient Temperature Range		-25	+70	°C
Power Derating	+50°C to +70°C	0.125		W / °C
Storage Temperature Range		-40	+85	°C
Humidity (non condensing)		---	95	% rel. H
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C

Notes

- Peak load lasting <30s with a maximum duty cycle of 10%, average output power not to exceed maximum power.
- All specifications typical at Ta=+25°C, resistive load, 115VAC, 60Hz input voltage and after warm-up time rated output current unless otherwise noted.
- Ripple & Noise of PCB mounting type measured with a 1μF/50V MLCC.
- We recommend to protect the converter by a slow blow fuse in the input supply line.
- Other input and output voltage may be available, please contact factory.
- Specifications are subject to change without notice.

Package Specifications PCB Mounting


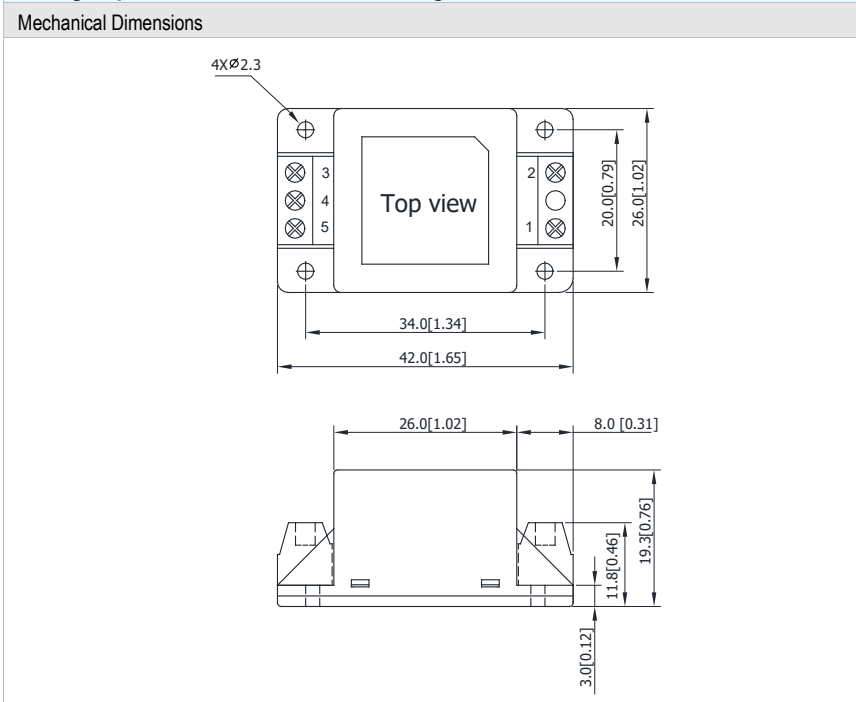
Pin Connections	
Pin	Function
1	AC (N)
2	AC (L)
3	NC
4	-Vout
5	+Vout

NC: No Connection

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: ± 0.5 (± 0.01)
- ▶ Pin pitch tolerance: ± 0.25 (± 0.01)
- ▶ Pin diameter $\varnothing 0.6 \pm 0.1$ (0.02 ± 0.004)

Physical Characteristics

Case Size	: 25.4x25.4x16.3mm (1.0x1.0x0.64 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Pin Material	: Tinned Copper
Weight	: 19.7g

Package Specifications Chassis Mounting


Connections	
Pin	Function
1	AC (N)
2	AC (L)
3	NC
4	-Vout
5	+Vout

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: ± 0.5 (± 0.02)

Physical Characteristics

Case Size	: 42.0x26.0x19.3mm (1.65x1.02x0.76 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Weight	: 23.9g

Order Code Table	
PCB Mounting	Chassis Mounting
AAF-05S03	AAF-05S03C
AAF-05S05	AAF-05S05C
AAF-05S09	AAF-05S09C
AAF-05S12	AAF-05S12C
AAF-05S15	AAF-05S15C
AAF-05S24	AAF-05S24C
AAF-05S48	AAF-05S48C

Distributed by:

www.texim-europe.com

The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

Italy



Via Matteotti 43
IT-20864 Agrate Brianza (MB)

T: +39 (0)39 971 3293
F: +39 (0)39 971 3293
E: italy@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com