

FEATURES

- ▶ Ultra Compact Size 1.5 x 1.0 x 0.6"
- ▶ Fully Encapsulated Module for PCB Mounting
- ▶ Universal Input 85-264VAC, 47-440Hz
- ▶ Protection Class II as per IEC/EN 60536
- ▶ I/O Isolation 4000VAC with Reinforced Insulation
- ▶ No Min. Load Requirement
- ▶ Operating Ambient Temp. Range -25°C to +70°C
- ▶ Overload/Voltage and Short Circuit Protection
- ▶ EMI Emission EN 55032/14-1 Class B & FCC Level B Approved
- ▶ EMC Immunity EN 61000-4-2,3,4,5,6,8,11 Approved
- ▶ Eco Design, Low No Load Power Consumption < 150mW
- ▶ Safety Approval to UL/cUL/IEC/EN 62368-1 (60950-1), TUV IEC/EN 60335-1 & CE Marking

NEW

PRODUCT OVERVIEW

The new ACF-10 Series from MINMAX is a new range of ultra-small, fully encapsulated 10 Watt AC/DC power supply modules. They are designed for easy PCB mounting featuring measuring only 1.5"x1"x0.6". The ACF-10 series consist 7 models featuring universal AC input (85-264VAC) and tight regulated single output voltage ranging from 3.3-48VDC; 4000VAC isolation with reinforced insulation; EMI emission EN 55032/14-1 class B approved; EMC immunity EN 61000-4-2,3,4,5,6,8,11 approved; no minimum load requirement; short circuit / overload / overvoltage protection and low stand-by power consumption <150mW as well. Units have been qualified via CB report and class II protection level for both UL/cUL/IEC/EN 62368-1(60950-1) and TUV/IEC/EN 60335-1 (Household Safety)certifications. The ACF-10 power supplies provide a good solution for space critical applications in consumer appliances, industrial electronics, instrumentation, household and communication equipment where PCB space is critical and limited.

Model Selection Guide

Model Number	Output Voltage VDC	Output Current		Input Current		Max. capacitive Load μF	Efficiency (typ.) @Max. Load, 115VAC %
		Max. mA	Peak ₍₁₎ mA	115VAC, 60Hz	230VAC, 50Hz		
				@Max. Load mA(typ.)			
ACF-10S03	3.3	2600	3380	186	121	4400	77
ACF-10S05	5	2000	2600	209	136	2200	80
ACF-10S09	9	1100	1440	199	130	680	83
ACF-10S12	12	830	1080	198	129	390	84
ACF-10S15	15	660	860	197	128	240	84
ACF-10S24	24	410	530	191	124	100	86
ACF-10S48	48	210	270	201	130	24	84

Input Specifications

Parameter	Conditions / Model	Min.	Typ.	Max.	Unit
Input Voltage Range	All Models	85	---	264	VAC
Input Frequency Range		47	---	440	Hz
Input Voltage Range		120	---	370	VDC
No-Load Power Consumption		---	---	0.15	W
Inrush Current (Cold Start at 25°C)	115VAC	---	---	20	A
	230VAC	---	---	40	A

Output Specifications

Parameter	Conditions / Model	Min.	Typ.	Max.	Unit	
Output Voltage Setting Accuracy		---	±1.0	±2.0	%	
Line Regulation	Vin=Min. to Max. @Full Load	---	---	±0.5	%	
Load Regulation	Io=0% to 100%	---	---	±1.0	%	
Minimum Load	No minimum Load Requirement					
Ripple & Noise	0-20 MHz Bandwidth	3.3V & 5VDC Output Models	---	---	60	mV _{P-P}
		Other Output Models	---	---	1	%V _{PP} of Vo
Over Voltage Protection	Zener diode clamp	---	125	---	% of Vo	
Temperature Coefficient		---	±0.01	±0.02	%/°C	
Over Load Protection	Foldback, auto-recovery (long term overload condition may cause damage)	---	150	---	%Inom.	
Short Circuit Protection	Hiccup mode, Automatic Recovery					

General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds	4000	---	---	VAC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
Switching Frequency		---	45	---	kHz
Hold-up Time	115VAC, 60Hz	---	8	---	ms
	230VAC, 50Hz	---	40	---	ms
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	452,916	---	---	Hours
Protection Class II	According IEC/EN 60536				
Safety Approvals	UL/cUL 60950-1 recognition(UL certificate), IEC/EN 60950-1(CB-report) UL/cUL 62368-1 recognition (UL certificate), IEC/EN 62368-1(CB-report) IEC/EN 60335-1 recognition(TUV certificata,CB-report)				

EMC Specifications

Parameter	Standards & Level		Performance
EMI	Conduction and Radiation	EN 55014-1, EN 55032, FCC part 15	Class B
EMS	EN 55014-2, EN 55024		
	ESD	EN 61000-4-2 Air ± 8kV , Contact ± 6kV	A
	Radiated immunity	EN 61000-4-3 10V/m	A
	Fast transient	EN 61000-4-4 ±2kV	A
	Surge	EN 61000-4-5 ±1kV	A
	Conducted immunity	EN 61000-4-6 10Vrms	A
	PFMF	EN 61000-4-8 30A/m	A
	Dips	EN 61000-4-11 30% 10ms	A
	Interruptions	EN 61000-4-11 >95% 5000ms	B

Environmental Specifications

Parameter	Conditions	Min.	Max.	Unit
Operating Ambient Temperature Range	Natural Convection	-25	+70	°C
Power Derating	+50°C to +70°C	0.25		W / °C
Storage Temperature Range		-40	+85	°C
Humidity (non condensing)		---	95	% rel. H
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C

Notes

- 1 Peak load lasting <30s with a maximum duty cycle of 10%, average output power not to exceed maximum power.
- 2 All specifications typical at Ta=+25°C, resistive load, 115VAC, 60Hz input voltage and after warm-up time rated output current unless otherwise noted.
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact factory.
- 5 Specifications are subject to change without notice.

The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

Italy



Via Matteotti 43
IT-20864 Agrate Brianza (MB)


T: +39 (0)39 971 3293
F: +39 (0)39 971 3293
E: italy@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com

Package Specifications

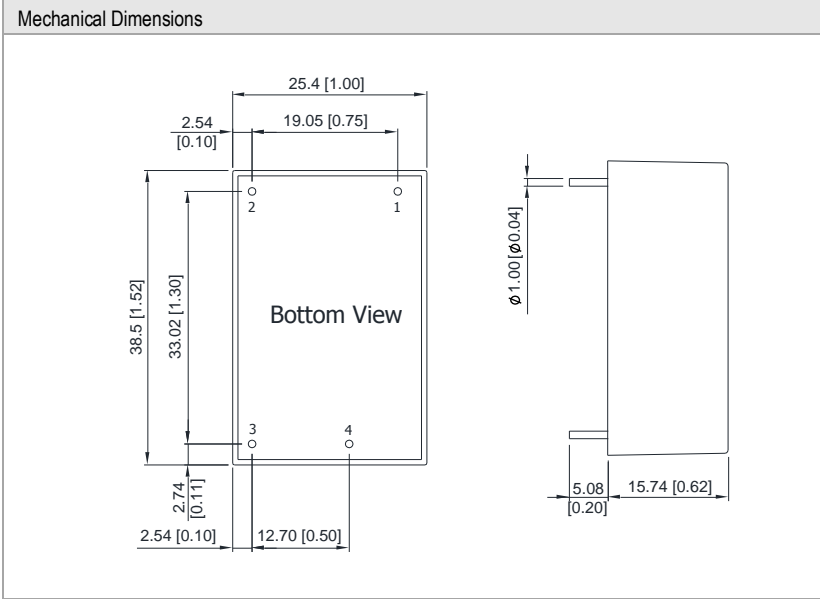

Pin Connections	
Pin	Function
1	AC(N)
2	AC(L)
3	-Vout
4	+Vout

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: ± 0.5 (± 0.02)
- ▶ Pin pitch tolerance: ± 0.25 (0.01)
- ▶ Pin diameter $\varnothing 1.0 \pm 0.1$ (0.04 ± 0.004)

Physical Characteristics

Case Size	: 38.5x25.4x15.74mm (1.52x1.00x0.62 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Pin Material	: Tinned Copper
Weight	: 29g

