



Cable X = 500 +/- 15mm

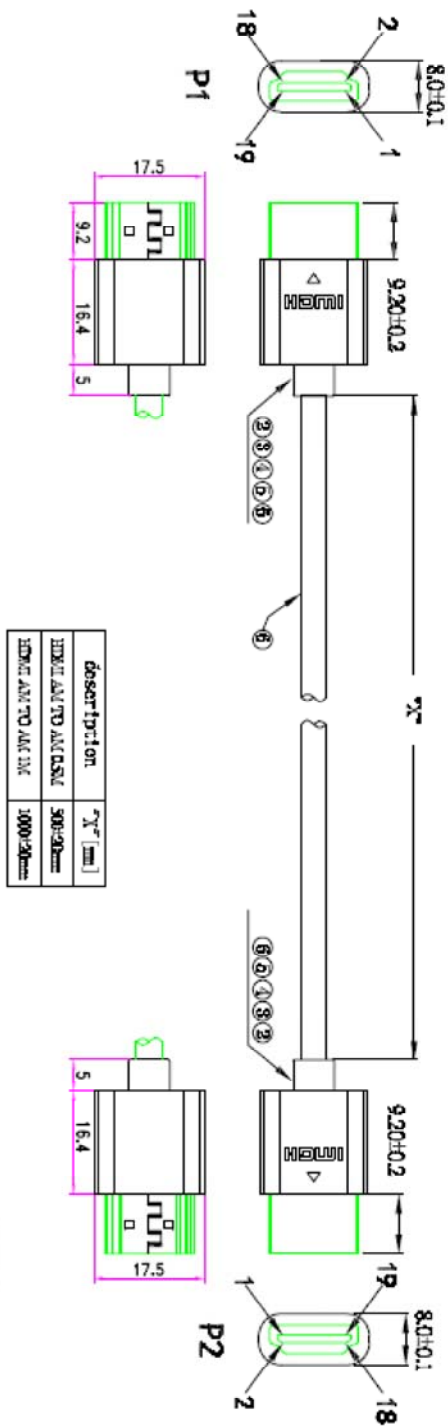

cable cross section

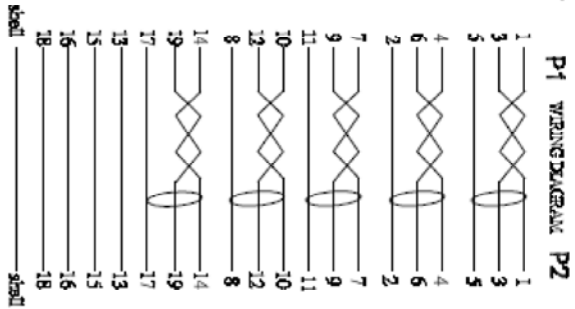

- ELECTRICAL TEST:
- 1.100% OPEN SHORT MIS-WIRE TEST
 - 2.CONTACT TESTSTANCE:2 ohm Max
 - 3.INSULATION RESISTANCE:5M ohm
 - 4.AC:200V DC:300V
 - 5.2K*4K VGA TEST
- NOTE: All Materials/Processes are RoHS

6	Outer mold	PVC 45P Black	2PCS
5	Inner mold	Low density PB , Natural	2PCS
4	Cover	HDMI AM shield cover	2PCS
3	Clamp	HDMI AM cable clamp	2PCS
2	connector	HDMI AM connector , contact gold plated , shield cover gold plated , color:Black	2PCS
1	Cable	HDMI A19.1AWG(18AWG)*P1/D(14AWG)+AL-MT(9P)+3.1AWG (70AWG)*C+A03 OD=2.02 mm PVC Black (no marking)	1PC
NO.	ITEM	Description	Qty

		TOLERANCE	MATERIAL		FINISH
VERSION	SCALE	ND	UNIT	MODEL NAME	
01		1/1	mm	315-H019A10501	
DATE	APPROVED	CHECKED	DRAWN	TITLE	
20180925			Jones	OUTLINE_Cable	

REV	REVISION RECORD	DATE	APPROVED	NAME
△				

DW Digwise International Corporation