

Shenzhen Leadtek Electronics Co.,Ltd

PRODUCT SPECIFICATION

TFT-LCD MODULE

Module No: LTK123FHHLM14-V0

☒ Preliminary Specification

☐ Approval Specification

Designed by	Checked by	Approved by
<i>jona</i>	<i>Terry</i>	<i>lan</i>

Final Approval by Customer

Approved by	Comment
	Distributed by:  www.texim-europe.com

※The specification of "TBD" should refer to the measured value of sample . If there is difference between the design specification and measured value, we naturally shall negotiate and agree to solution with customer.

Document Revision History

[illegible]

1.0 General Description

ITEM	STANDARD VALUES	UNITS
LCD type	12.3" TFT	--
Dot arrangement	720(RGB) × 1920	dots
Color filter array	RGB vertical stripe	--
Display mode	IPS / Transmissive / Normally Black	--
Viewing Direction	ALL	--
LCM Outline Dimension	124.20(W) × 303.13(H) × 6.05(T)	mm
Active area	109.51(W) × 292.03(H)	mm
Dot pitch	0.1521 × 0.1521	mm
Interface	MIPI	mm
Operating temperature	-25 ~ +75	°C
Storage temperature	-35 ~ +85	°C
Back Light	44pcs White LED	--
Weight	TBD	g

2.0 Absolute Maximum Ratings

2.1 Electrical Absolute Rating

Parameter	Symbol	Min.	Max.	Unit	Note
Power supply voltage	VCC	3.0	+3.6	V	GND=0
	IOVCC	1.65	+1.95	V	GND=0

2.2 Environment Absolute Rating

Item	Symbol	Min.	Max.	Unit	Note
Operating Temperature	Topa	-25	75	°C	
Storage Temperature	Tstg	-35	85	°C	


2.3 Back-light Unit:

PARAMETER	Sym.	Min.	Typ.	Max.	Unit	Test Condition	Note
LED Current	IF	—	—	320	mA	—	—
LED Voltage	VF	31.9	33	37.4	V	I=320mA	—
Life Time		—	30000	—	Hr.	I ≤ 320mA	—
Brightness	Luminance	—	1000	—	cd/m2	I=320mA	
Color	White						

Note (1) Permanent damage may occur to the LCD module if beyond this specification. Functional operation should be restricted to the conditions described under normal operating conditions.

(2) Ta=25±2°C

(3) Test condition: LED Current 320mA

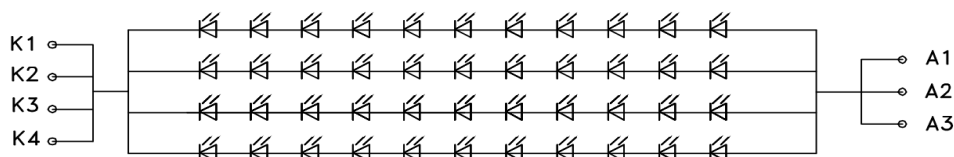

$$V_f = 31.9 \sim 37.4V$$

$$I = 320mA$$



3.0 OPTICAL CHARACTERISTICS

3.1 Optical Specification

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Transmittance (with Polarizer)		T (%)	$\Theta=0$ Normal viewing angle	4.55	5.0	—	%	Measuring with polarizer, for reference only Base on Vop=6.2V
Transmittance (without Polarizer)		T (%)		15.95	17.73	—	%	
Contrast Ratio		CR		800	1000	—	—	(1)(2)
Response Time	25℃	T_R+T_F		—	—		msec	(1)(3)
	-20℃			—	—			
	-30℃			—	—			
Color Gamut	(%)			65	70	—	%	C-light
Color Chromaticity (CIE1931)	White	W_x		-0.02	0.303	+0.02	—	(1)(4) CF glass C-light
		W_y			0.327		—	
	Red	R_x			0.658		—	
		R_y			0.328		—	
	Green	G_x			0.283		—	
		G_y			0.583		—	
	Blue	B_x			0.138		—	
		B_y			0.081		—	
Viewing Angle	Hor.	Θ_L	CR>10	80	85	—	—	(1)(4) Measuring with polarizer, for reference only
		Θ_R		80	85	—		
	Ver.	Θ_U		80	85	—		
		Θ_D		80	85	—		
Optimal View Direction		Free						(5)




3.2 Measuring Condition



15min. warm-up time.

3.3 Measuring Equipment

Note (1) Definition of Viewing Angle:

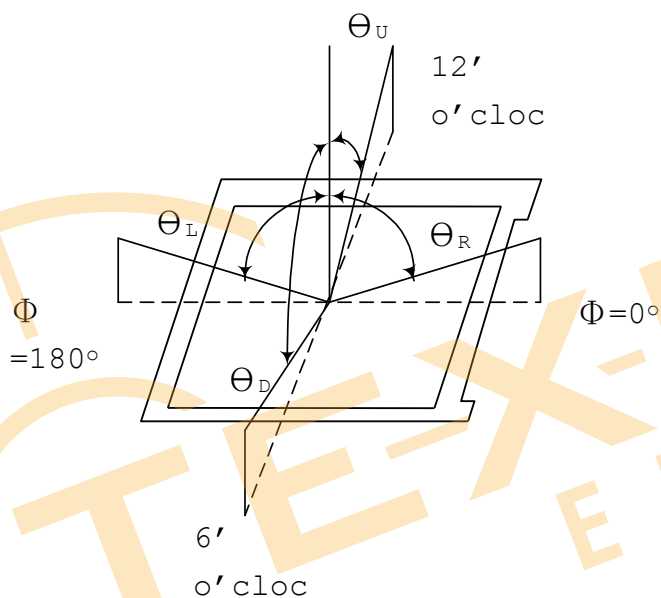

Note (2) Definition of Contrast Ratio (CR) :
measured at the center point of panel

$$CR = \frac{\text{Luminance with all pixels white}}{\text{Luminance with all pixels black}}$$

4.0 MIPI DC characteristics

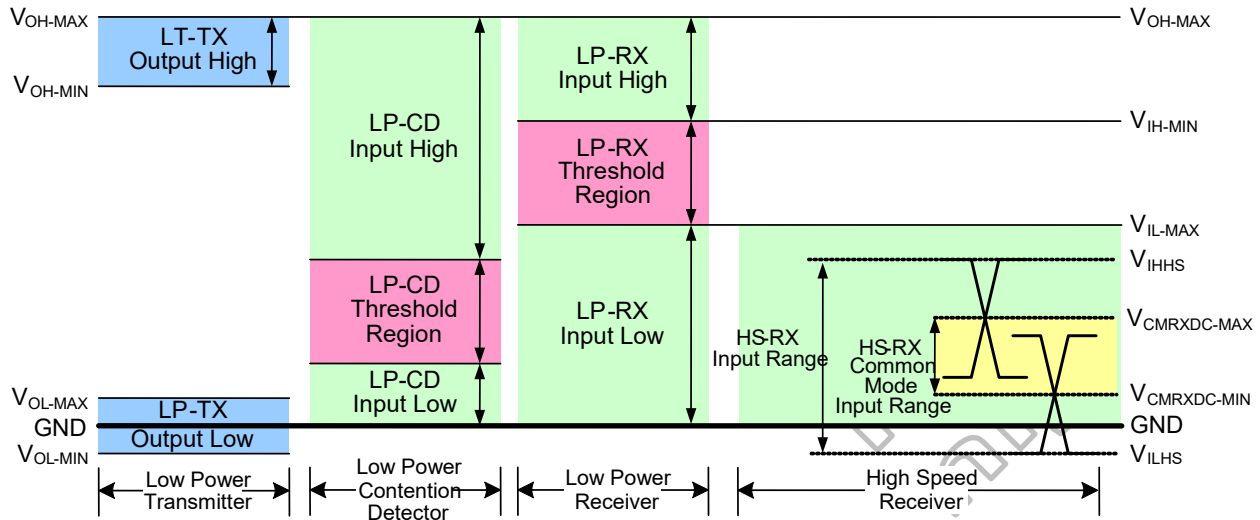


Figure 4.1 : MIPI signaling and contention voltage levels

DC characteristics for MIPI LP mode

Parameter	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
Logic 1 input voltage	V_{IH}	880	-	-	mV
Logic 0 input voltage	V_{IL}	0	-	550	mV
Logic 1 output voltage	V_{OH}	1.1	1.2	1.3	V
Logic 0 output voltage	V_{OL}	-50	-	50	mV

Table 4.2 : DC characteristics for MIPI LP mode

DC characteristics for MIPI HS mode

Parameter	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
Common-mode voltage HS Receive mode	V_{CMRXDC}	70	-	330	mV
Differential input high threshold ⁽¹⁾	V_{IDTH}	-	-	70	mV
Differential input low threshold ⁽¹⁾	V_{IDTL}	-70	-	-	mV
Single-ended input high voltage	V_{IHHS}	-	-	460	mV
Single-ended input low voltage	V_{ILHS}	-40	-	-	mV
Differential input impedance	Z_{ID}	80	100	125	Ω
TX HS transmit differential voltage (VDP-VDN)	$ VOD $	140	200	270	mV

Note: (1) V_{IDTH} and V_{IDTL} only for reference, related to power and ground noise, this spec need to check on panel performance to fine tune

Table 4.3 : DC characteristics for MIPI HS mode

4.2 MIPI data-clock timing specification

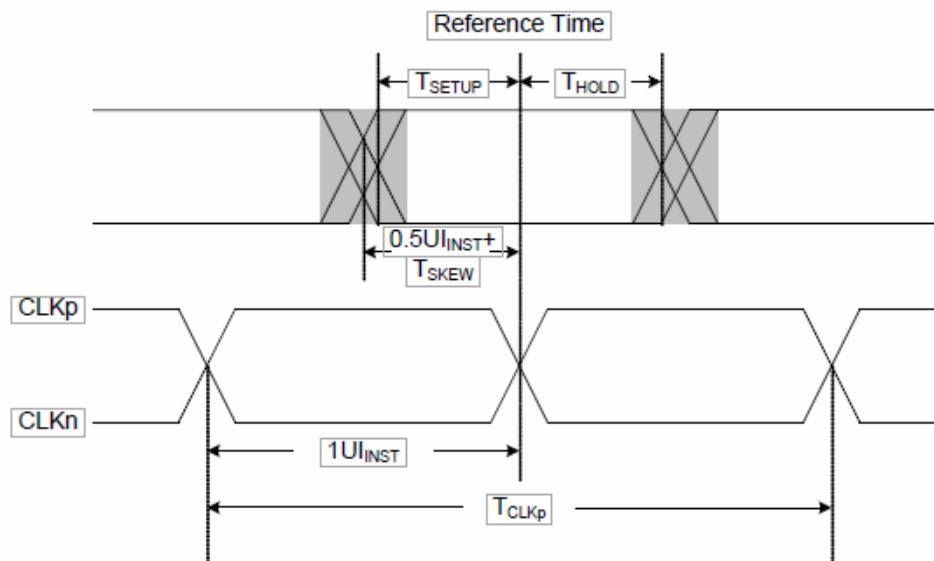



Figure 8.5 : Data to clock timing

Parameter	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
UI instantaneous	UI_{INST}	0.909	-	12.5 ⁽¹⁾	ns
Data to clock setup time	T_{SETUP}	0.15 ⁽²⁾	-	-	UI_{INST}
Data to clock hold time	T_{HOLD}	0.15 ⁽²⁾	-	-	UI_{INST}

Note: (1) This value corresponds to a minimum 80 Mbps data rate.

(2) Total SETUP and HOLD window for receiver of $0.3 \cdot UI_{INST}$

4.3 Reset input timing

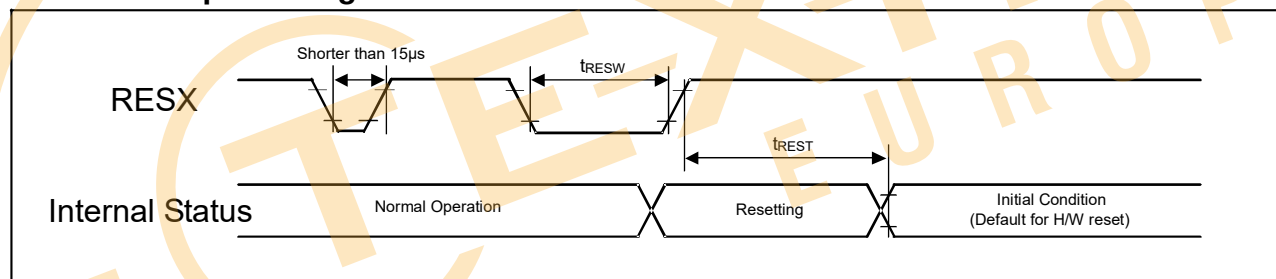

Symbol	Parameter	Related pins	Spec.			Unit	Note
			Min.	Typ.	Max.		
t_{RESW}	Reset low pulse width ⁽¹⁾	RESX	15	-	-	µs	-
t_{REST}	Reset complete time ⁽²⁾	-	5	-	120	ms	-

Note: (1) Spike due to an electrostatic discharge on RESX line does not cause irregular system reset according to the table below.

t_{RESW} Shorter than 15 us, Reset will be rejected.

5.0 Interface Pin Connection


(Input signal): FPC Down Connector, (FH19SC-40S-0.5SH (HIROSE), 50pin, pitch = 0.5mm)

Pin No.	Symbol	I/O	Function	Remark
1	GND	I	Power Ground	
2	D0N	P	MIPI_DP0- are differential data signal line	
3	D0P	P	MIPI_DP0+ are differential data signal line	
4	GND	I	Power Ground	
5	D1N	P	MIPI_DP1- are differential data signal line	
6	D1P	P	MIPI_DP1+ are differential data signal line	
7	GND	I	Power Ground	
8	CLKN	P	Power Ground	
9	CLKP	P	- LVDS differential data input	
10	GND	I	+ LVDS differential data input	
11	D2N	P	MIPI_DP2- are differential data signal line	
12	D2P	P	MIPI_DP2+ are differential data signal line	
13	GND	I	Power Ground	
14	D3N	P	MIPI_DP3- are differential data signal line	
15	D3P	P	MIPI_DP3+ are differential data signal line	
16	GND	I	Power Ground	
17	IOVCC1.8V	I	Power supply for interface logic circuits(1.8V)	
18	VCI3.3V	I	LCM Analog supply voltage (3.3V)	
19	GND	I	Power Ground	
20	RESET	P	Reset signal input terminal. Active at 'L'.	
21	GND	I	Power Ground	
22	GND	I	Power Ground	
23	NC	---	No connection	
24	NC	---	No connection	
25	GND	---	Power Ground	
26	GND	I	Power Ground	
27	TE	---	Tearing effect output pin is used to synchronize	

28	GND	I	Power Ground	
29	GND	I	Power Ground	Note1
30	GND	P	No connection	
31	LED A	P	LED power(Anode)	
32	LED A	P	LED power(Anode)	
33	LED A	P	LED power(Anode)	
34	NC	---	No connection	Note3
35	LED K	I	LED cathode	Note3
36	LED K	P	LED cathode	
37	LED K	P	LED cathode	
38	LED K	P	LED cathode	
39	NTC_A	P	NTC_Anode	
40	NTC_K	P	NTC_Cathode	

6. Mechanical Drawing

Front View

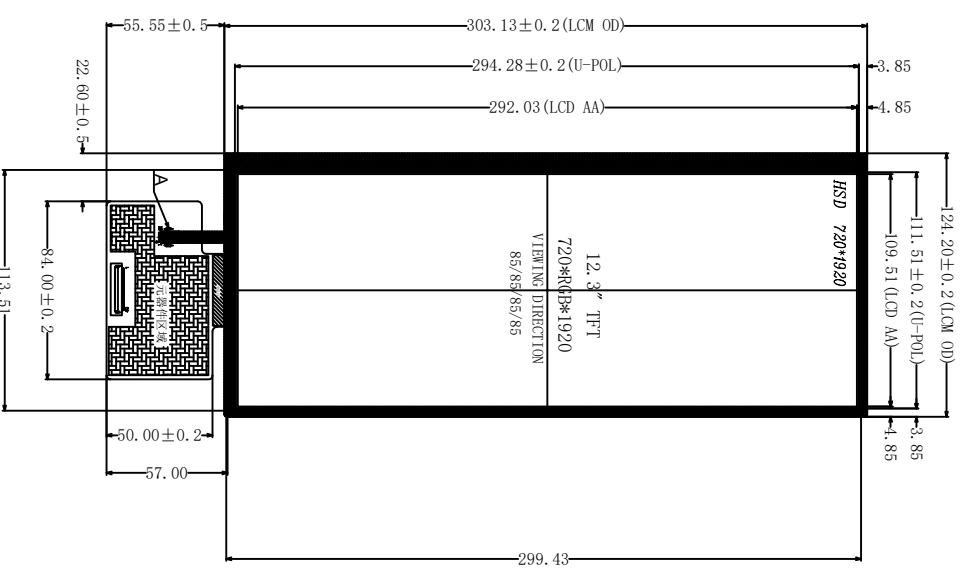

Side View



Back View




FPC PIN定义

Pin	Symbol	Description
1	A1	Anode (+)
2	A2	Anode (+)
3	A3	Anode (+)
4	NC	No connection
5	K1	Cathode (-)
6	K2	Cathode (-)
7	K3	Cathode (-)
8	K4	Cathode (-)
9	NTC1	Thermistor (+)
10	NTC2	Thermistor (+)

1	GND
2	D0N
3	D0P
4	GND
5	D1N
6	D1P
7	GND
8	CLKN
9	CLKP
10	GND
11	D2N
12	D2P
13	GND
14	D3N
15	D3P
16	GND
17	IDVCC1.8V
18	VC13.3V
19	GND
20	RESET
21	GND
22	GND
23	NC
24	NC
25	GND
26	GND
27	TE
28	GND
29	GND
30	GND
31	LEDA
32	LEDA
33	LEDA
34	NC
35	LEDK
36	LEDK
37	LEDK
38	LEDK
39	NTC_A
40	NTC_K

- Notes:
1. Display : 12.3", TFT
 2. Resolution: 720xRGBx1920
 3. LCD Viewing Direction: ALL,
 4. Display Mode: Normally Black
 5. LCM Brightness: 1000 cd/m² (TYP)
 6. unmark Tolerance: ±0.2
 7. OPERATING TEMP: -25° C ~ +75° C
 8. STORAGE TEMP: -35° C ~ +85° C
 9. Requirements on Environmental Protection: ROHS

VF=31.9~37.4V
I=320mA



LEADTEK COMPANY LIMITED

REV	DESCRIPTION	DATE	NAME	Customer No.	SCALE: 1/1	PAGE: 1/1	Approve	Check	Drawn
1	NEW	2023.08.17	IAN	LTK123FHLM14	VER: V0			JONA	IAN

7.0 Reliability test items

NO	Item	Conditions	Remark
1	High Temperature Storage	Ta=+85℃,48hrs	
2	Low Temperature Storage	Ta=-35℃,48hrs	
3	High Temperature Operation	Ta=+75℃,48hrs	
4	Low Temperature Operation	Ta=-25℃,48hrs	
5	High Temperature and High Humidity (operation)	Ta=+50℃,90%RH,48hrs	
6	Thermal Cycling Test (non operation)	-20℃(0.5hr)→+60℃(0.5hr),100cycles	

Note: All tests above are practiced at module type.

There is no display function NG issue occurred, All the cosmetic specification is judged before the reliability stress.

8.0 Packing form

TBD



深圳市丽台电子有限公司

Shenzhen Leadtek Electronics Co.,Ltd

Quality Inspection Standards

品质允收标准

Model No. / 产品型号: Applies More than 12.3 Inches Touch Display Screen**Updated Date / 生效日期:** 2022-05-20**Version / 版本:** A0**Customer confirmation :** _____

Record of Revision / 修订履历

Version / 版本	Revision Record / 修订内容	Reviser / 修订人	Revision Date / 修订日期
V0	首发 / Starting	Green	2022.05.20

1.Scope of application /适用范围.

This document shall be applied to more than 10.0 inches touch display screen.

本文件适用于5.5~10.0 寸触摸显示屏.

2.Inspection conditions and environment /检验条件与环境.

2.1 Inspection Conditions /检验条件:

(1) Inspection Distance /检测距离: 35cm ±5cm.


(2) Check time /检验时间:

Displays performance test /功能测试: 3~5S /Image, Cosmetic Inspection /外观检验:12~15S.

(3) Check the viewing angle /检验视角:

Light-on Inspection Angle /点灯检验角度: ±45°.

Cosmetic Inspection Angle /外观检验角度: ±45°.

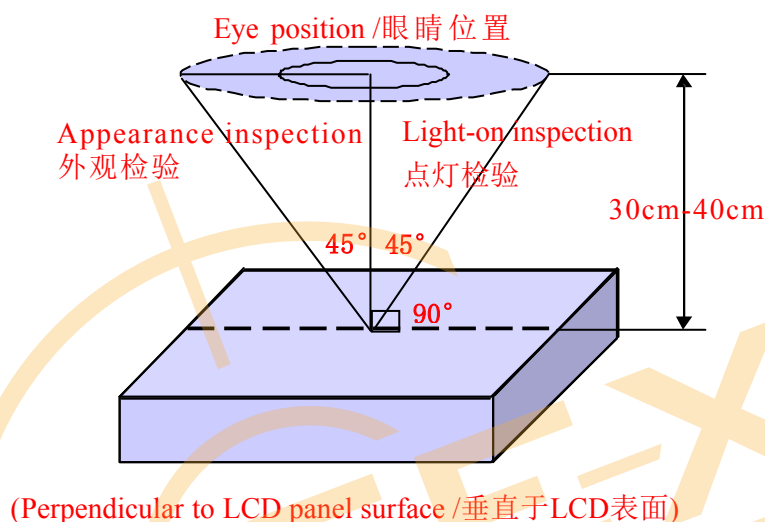

2.2 Inspection environment /检验环境:

Ambient Temperature 温度		25°C±5°C
Ambient Humidity 湿度		55±5%RH
Ambient Illumination 亮度	Cosmetic Inspection 外观检验	800-1000 Lux
	Functional Inspection 点灯检验	200~300Lux

2.3 Sampling Conditions /抽样条件:

(1) Quantity to be inspected /批量: Quantity of shipment lot per model /单次运送单一型号数量.

(2) Sampling method /抽样方法:

Sampling Plan /抽样计划		GB/T 2828.1- 2003
		Normal Inspection , Single Sampling 正常检验、单次抽样
		General inspection level: II 一般检验水平: 二级
AQL	Major Defect /主要缺陷	0.65
	Minor Defect /次要缺陷	1.0

(3) The classification of Major(MA) and Minor(MI) defects is shown as “3.1 Classification of defects” .

主缺(MA)及次缺(MI)定义于”3.1缺陷分类”.

3.Terms And Definitions /术语和定义

3.1 Classification of defects / 缺陷分类 :

(1) Major defects /主要缺陷:

A major defect is a defect that is likely to result in failure, or to reduce materially the usability of the product for its intended purpose .

可导致产品功能失效或减少产品可用性的缺陷.

(2) Minor defects /次要缺陷:

It will not cause the product to fail and reduce the defects in the effective use and operation of the product.

不会导致产品功能失效和减少产品的有效使用与操作的缺陷.

3.2 Point defects /点状缺陷:

The size of the point defect is defined by the diameter D, and the average diameter of the defect is


$$D=1/2 (W+L) .$$

点状缺陷的大小是由直径 D 定义的, 缺陷的平均直径 $D=1/2(W+L)$.

3.3 Linear defects /线状缺陷:

When defect size $L \geq 2W$, the defect count as liner type defect. Size of linear defect is defined by length (L) and the maximum width (W).

当缺陷尺寸 $L \geq 2W$ 时, 被视为线状缺陷, 线状缺陷是由长度 (L) 和最大宽度 (W) 定义的.

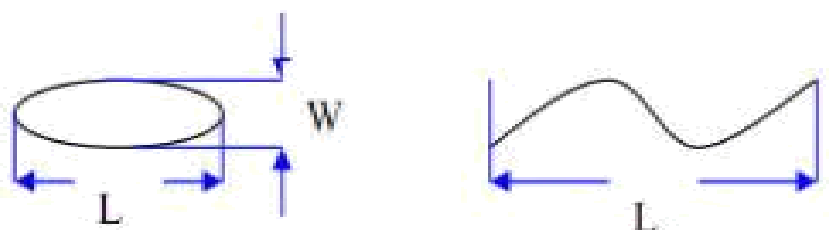

3.4 LCD sub-pixel dot /LCD子像素点

(1) Definition /定义 : The point defect area is greater than 50% of the LCD sub-pixel area, and is visible through ND5% filter masking .

子像素点缺陷面积大于 50% LCD子像素面积, 且透过 ND5%遮盖是可见的.

(2) The drawing of 1/2 area sub-pixel definition / 1/2 面积的子像素定义绘图:

The 1/2 area sub-pixel can be defined as below one or more of specific shapes

1/2 面积的子像素可以定义为如下一个或多个特定形状图:



3.5 Small bright dot /细碎亮点 :

Point defects smaller than "LCD sub-pixels" /小于“LCD子像素点”的点缺陷.


(Ratio of Zone I to Zone O / I 区与 O 区比例: 1: 2: 1)



3.6 ND filter inspection method /ND卡的检验方法:

Hold the ND filter about 5cm above the display area, with your eyes 30-40cm away from the panel, and observe for 2~3 seconds.

在显示区域上方大约 5cm 处握住 ND 卡, 眼睛距离面板 30-40cm, 观察2~3 秒.

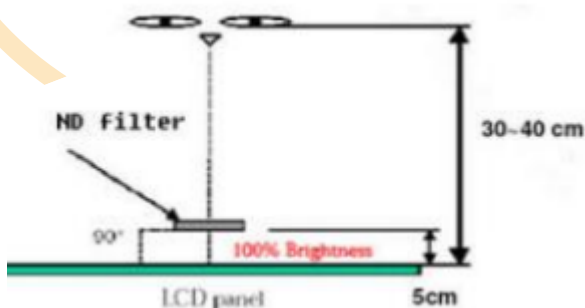

3.7 Any FPC surface problems that do not leak copper on the surface and do not cause functional failure are acceptable.

任何 FPC 表面问题, 表面未露铜和不造成功能失效是可以接受.

3.8 Extraneous substances that can be wiped out , like Finger point,Particles are not considered as a defect .

可以被擦拭干净的表面物质不视为缺陷 (如手指印, 尘粒) .

3.9 Defects that can be covered by the material and are not visible in appearance are not considered defects.

能被物料覆盖，外观不可见的缺陷不视为缺陷。

3.10 Panel damage /面板损伤:

Glass damage outside the AA display area that does not affect the effective wiring is acceptable.

AA 显示区域以外的玻璃损伤，不影响有效线路是可以接受的。

3.11 Issues not specified or defined in this acceptance standard shall be handled through friendly negotiation between the two parties.

本允收标准中未规定或定义的问题，双方友好协商处理。

4. Inspection standards /检验标准

4.1 Structural Dimensions /结构尺寸规格

Serial Number 序号	Measurement items /测量项目		Specification /规格	Remark /备注
	名称 /Name	Unit /单位	Tolerance /公差	
1	Outside dimension: Length 尺寸: 长	mm /毫米	0.15mm~0.30mm	Please refer to the product specification for detailed dimensions and tolerances 详细的尺寸规格和公差请参考产品规格书
2	Outside dimension: Width 尺寸: 宽	mm /毫米	0.15mm~0.30mm	
3	Outside dimension: Thickness 尺寸: 高	mm /毫米	0.30mm~0.50mm	

4.2 Appearance Inspection Specification /外观检验规格

(D : diameter, W : width, L : length, N : quantity, DS : spacing)

Inspection area 检验区域	Inspection items 检验项目	Inspection specifications 检验规格	Defect category 缺陷类别	
Glass 玻璃	Wire(on Array) 线路	Can't be damaged 不能损伤	MA	
	Chipping/corner breaking 崩边/破角	Can't affect the effective lines and functions 不能影响有效线路和功能	MA	
	Edge 边缘	There must be no extensional cracks 不可有延伸性裂纹	MA	
Silicone 硅胶	Silicone coating 硅胶涂布	The height must not exceed the LCD CF surface 高度不能超过LCD CF面		MI
	Glue overflow 溢胶	Can't cover FPC, POL, etc 不能覆盖到FPC、POL等		MI

Inspection area 检验区域	Inspection items 检验项目	Inspection specifications 检验规格	Defect category 缺陷类别	
PCBA FPC Connector 连接器	Appearance 外观	Scratches or injuries are not allowed to cause copper exposure 划伤或损伤不允许表面出现露铜		MI
	Component 元器件	Can't be damaged and lack 不能损伤和缺少	MA	
	Goldfinger oxidation 金手指氧化	Not allowed 不允许		MI
	Connection status 连接状况	The connection must be accurate and stable 必须准确稳定连接	MA	
	Break 破裂	Not allowed 不允许	MA	
	Soldering, false soldering/tinning/tin beads 假焊/连锡/锡珠	Not allowed 不允许	MA	
POL 偏光片	Scratches 划伤	1. $W \leq 0.10\text{mm}$; $L \leq 5\text{mm}$, Ignore (忽略) 2. $0.10\text{mm} < W \leq 0.15\text{mm}$; $L \leq 5\text{mm}$; $N \leq 5$; $DS \geq 10\text{mm}$ 3. $0.15\text{mm} < W$; $5\text{mm} < L$, Not allowable (不允许)		MI
	Dent 凹凸印	1. $D \leq 0.25\text{mm}$, Ignore (忽略) 2. $0.25\text{mm} < D \leq 0.50\text{mm}$; $N \leq 5$; $DS \geq 10\text{mm}$ 3. $0.50\text{mm} < D$, Not allowable (不允许)		MI
	Bubbles 气泡	1. $D \leq 0.25\text{mm}$, Ignore (忽略) 2. $0.25\text{mm} < D \leq 0.50\text{mm}$; $N \leq 5$; $DS \geq 10\text{mm}$ 3. $0.50\text{mm} < D$, Not allowable (不允许)		MI
	Point defects 点状不良	1. $D \leq 0.25\text{mm}$, Ignore (忽略) 2. $0.25\text{mm} < D \leq 0.50\text{mm}$; $N \leq 5$; $DS \geq 10\text{mm}$ 3. $0.50\text{mm} < D$, Not allowable (不允许)		MI
	Edge bubbles 边缘气泡	1. Within 1/2BM of the display area, it is not allowed 显示区往外 1/2BM 区域内, 不允许 2. The display area is 1/2 outside the BM area, and it is not controlled 显示区往外 1/2BM 区域以外, 不管控		MI
	Dirty/watermarked 脏污/水印	No dirt/water lines/finger marks are allowed, and must be wiped clean 不允许有脏污/水印/手指印, 须擦拭干净方可		MI
	Warping 起翘	Not allowed 不允许		MI
	Attaching offset 贴偏	It is necessary to completely cover the display area outward, within the 1/2BM area, or without leaking POL edges after TP is attached 需完整覆盖显示区往外、1/2BM 区以内或贴合 TP 后不会出现漏偏光片边缘		MI
	Mixture 混料	Mixing different types of POL or not using POL as required by the BOM, not allowed 不允许混贴不同型号的 POL 或未按 BOM 要求使用 POL	MA	

Inspection area 检验区域	Inspection items 检验项目	Inspection specifications 检验规格	Defect category 缺陷类别	
TP&CG	Point defects 点状不良	1. $D \leq 0.25\text{mm}$, Ignore (忽略) 2. $0.25\text{mm} < D \leq 0.50\text{mm}$; $N \leq 5$; $DS \geq 10\text{mm}$ 3. $0.50\text{mm} < D$, Not allowable (不允许)		MI
	Scratches 划伤	1. $W \leq 0.10\text{mm}$; $L \leq 5\text{mm}$, Ignore (忽略) 2. $0.10\text{mm} < W \leq 0.15\text{mm}$; $L \leq 5\text{mm}$; $N \leq 5$; $DS \geq 10\text{mm}$ 3. $0.15\text{mm} < W$; $5\text{mm} < L$, Not allowable (不允许) 4. There is a feeling scratch, Not allowable (有感知划伤, 不允许)		MI
	Edges and corners cracked 崩角/崩边	1. Product front / 产品正面: Edge and corner chipping is not allowed 崩角、崩边不允许 2. Product back / 产品背面: $X \leq 0.5$, $Y \leq 0.5$, $Z \leq 1/2T$; $N \leq 5$; $DS \geq 10\text{mm}$		MI
	Silk screen 丝印	The silk screen is clear, complete and correct 丝印清晰、完整、内容正确		MI
	Dirty 脏污	Non-wipeable dirt, not allowed 不可擦拭的脏污, 不允许		MI
	Broken 破损	Not allowable 不允许	MA	
	Ink color aberration 油墨色差	$\Delta E > 1$, Not allowable (不允许)		MI
	Cover pinholes 针孔	1. $D \leq 0.20\text{mm}$, $N \leq 5$, $DS \geq 10\text{mm}$, allowable 2. $D > 0.20\text{mm}$, intensive pinholes (密集型针孔), Not allowable (不允许)		MI
	IR holes IR孔	Dirt, deviation, color difference, etc. are not allowed 不允许脏污、偏位、色差等		MI
BL 背光	Backlight separation 背光分离	Not allowable 不允许		MI
	Deformation of rubber iron and rubber frame 胶铁、胶框变形	Use the plug gauge 0.3mm on the flat surface and can snap in and judge NG 在平面上使用塞规0.3mm卡翘曲位置, 能卡进判定NG		MI
	The iron frame is oxidized and not tightened 铁框氧化、卡不紧	Not allowable 不允许		MI
	Backlight sticky solder beads, glue, etc 背面粘锡珠、残胶等	Not allowable 不允许		MI
	Inkjet coding, Barcode, QR code 喷码/条码/二维码	The Inkjet coding is clear and complete, the barcode and QR code can be scanned normally, and the content and format match 喷码清晰完整、条码和二维码可正常扫描, 内容和格式相符		MI
	Accessories (protective film, double-sided tape, insulating adhesive, etc.) 辅料 (保护膜、双面胶、绝缘胶等)	Defects such as missing pastes, sticking deviations, defects, and fractures are not allowed 不允许有漏贴、贴偏、残缺、断裂等缺陷		MI

4.3 Electrical test specifications /电性检查规格

(D : diameter, W : width, L : length, N : quantity, DS : spacing)

Inspection items 检验项目	Inspection specifications 检验规格	Defect category 缺陷类别	
Glass bright spots/dark spots 玻璃亮点/暗点	1. $D \leq 0.25\text{mm}$, Ignore (忽略) 2. $0.25\text{mm} < D \leq 0.50\text{mm}$; $N \leq 5$; $DS \geq 10\text{mm}$ 3. $0.50\text{mm} < D$, Not allowable (不允许)		MI
Mura	Use ND5% filter masking, visual invisibility is OK, 200~300Lux 使用ND5%遮盖, 目视不可见即为OK, 200~300Lux		MI
Small bright dot 细碎亮点	Use ND5% filter masking, visual invisibility is OK 使用ND5%遮盖, 目视不可见即为OK		MI
Light leakage 漏光	1. Use ND5% filter masking, visual invisibility is OK 使用ND5%遮盖, 目视不可见即为OK 2. If necessary, sign off on the sample 必要时, 签限定样		MI
Backlight black/white dots 背光黑点/白点	1. $D \leq 0.25\text{mm}$, Ignore (忽略) 2. $0.25\text{mm} < D \leq 0.50\text{mm}$; $N \leq 5$; $DS \geq 10\text{mm}$ 3. $0.50\text{mm} < D$, Not allowable (不允许)		MI
Linear foreign bodies 线状异物 (异物毛丝等)	1. $W \leq 0.10\text{mm}$; $L \leq 5\text{mm}$, Ignore (忽略) 2. $0.10\text{mm} < W \leq 0.15\text{mm}$; $L \leq 5\text{mm}$; $N \leq 5$; $DS \geq 10\text{mm}$ 3. $0.15\text{mm} < W$; $5\text{mm} < L$, Not allowable (不允许)		MI
Black/White Print 黑印/白印	Use ND5% filter masking, visual invisibility is OK 使用ND5%遮盖, 目视不可见即为OK		MI
The display is uneven 显示不均匀	Use ND5% filter masking, visual invisibility is OK 使用ND5%遮盖, 目视不可见即为OK		MI
The brightness is uneven 亮度不均匀	Brightness uniformity $< 85.0\%$, Not allowable 亮度均匀性 $< 85.0\%$, 不允许		MI
Displacement of the membrane 膜材移位	Not allowable 不允许		MI
Interference pattern/Newtonian pattern 干涉纹/牛顿纹	Not allowable 不允许		MI
Display abnormal 显示异常	Not allowable 不允许	MA	
No display 无显示	Not allowable 不允许	MA	
Line/Missing Drawing 线条/缺画	Not allowable 不允许	MA	
Splash screen 闪屏	Not allowable 不允许	MA	
LCD grid LCD网格	Not allowable 不允许	MA	
Afterimage 残影	Not allowable 不允许	MA	
Wrong viewing angle 视角错误	Not allowable 不允许	MA	
No touch 无触摸	Not allowable 不允许	MA	
Touch the jump point 触摸跳点	Not allowable 不允许	MA	
Not sensitive 触摸不灵敏	Not allowable 不允许	MA	

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.


It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

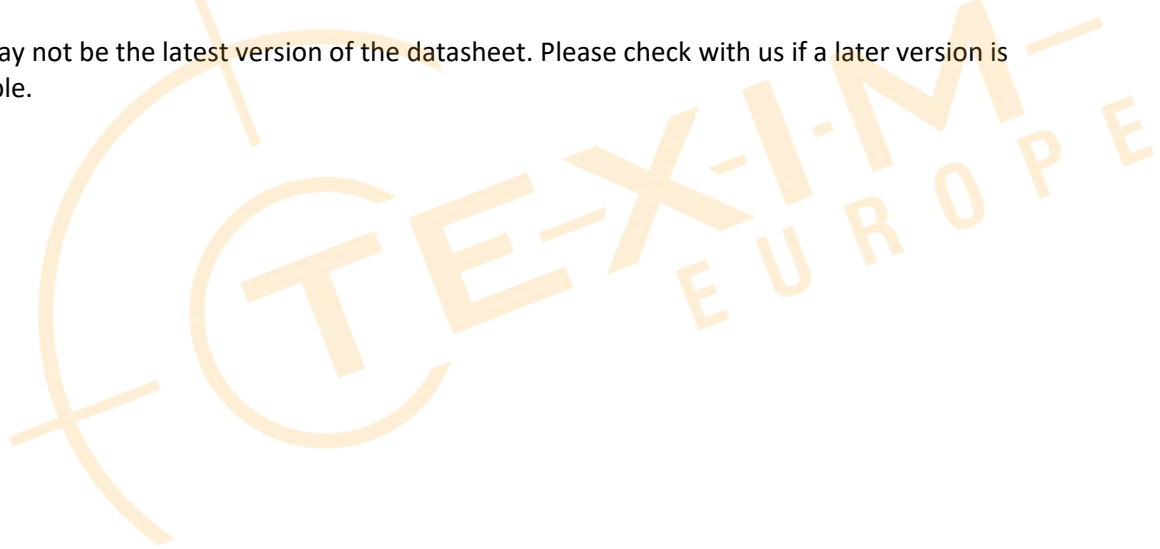



Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik

T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
E: austria@texim-europe.com



Nordic

Stockholmsgade 45
2100 Copenhagen

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com