
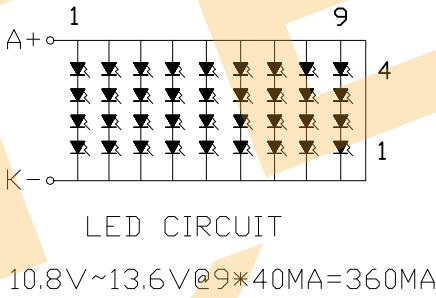
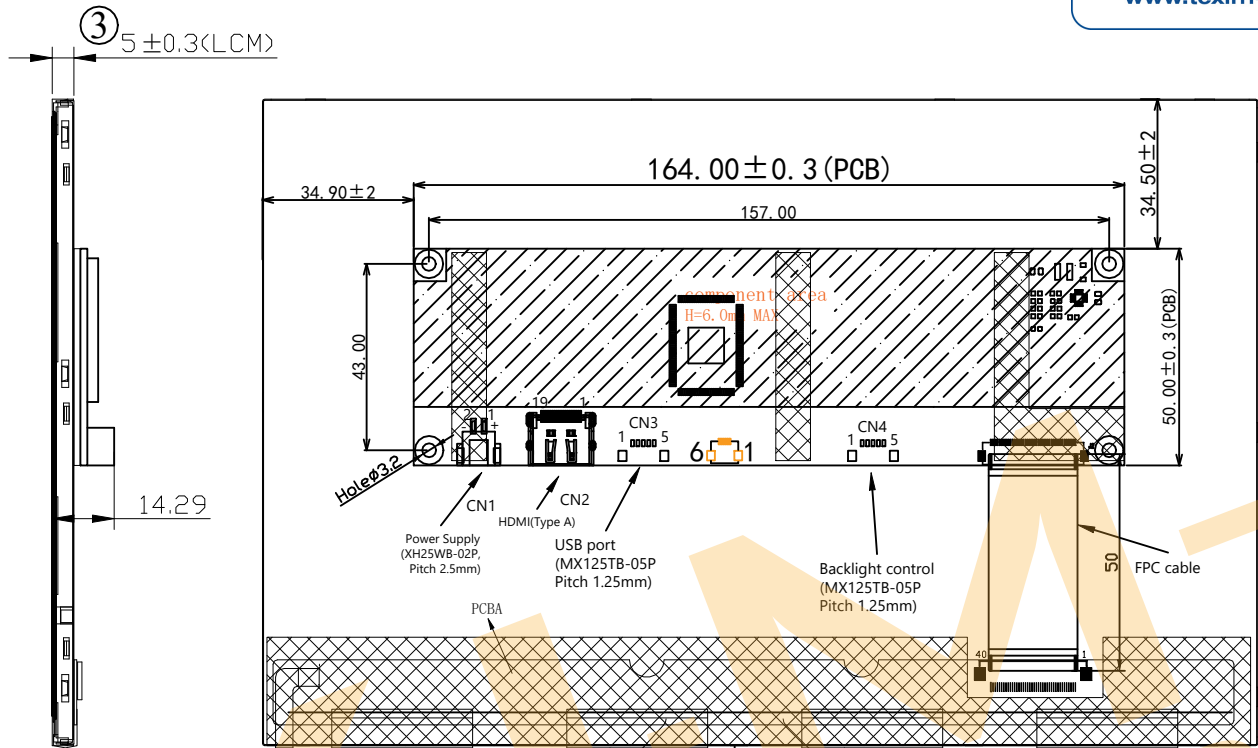


Distributed by:

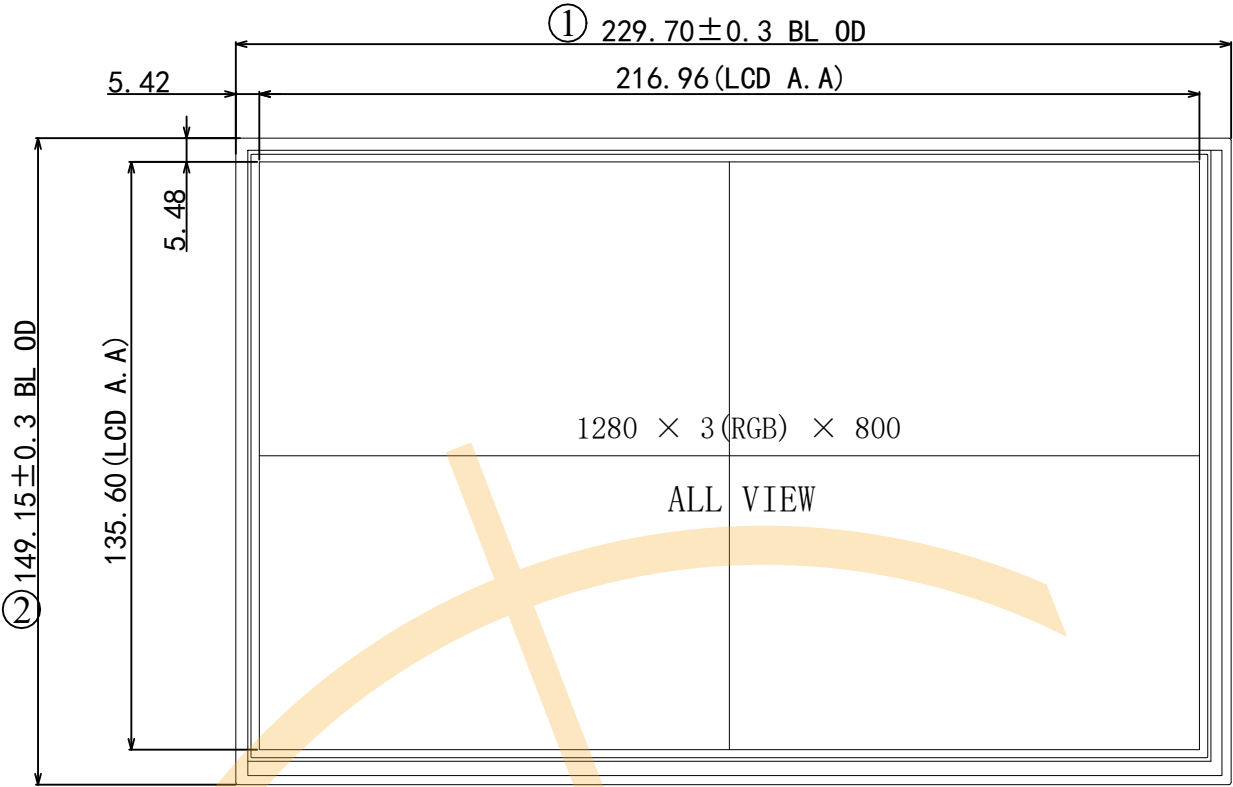

CN1	
PIN	NAME
1	DC+12V
2	GND

Power interface

CN2	
PIN	NAME
1	TMD5_DATA2+
2	GND
3	TMD5_DATA2-
4	TMD5_DATA1+
5	GND
6	TMD5_DATA1-
7	TMD5_DATA0+
8	GND
9	TMD5_DATA0-
10	TMD5_CLK+
11	GND
12	TMD5_CLK-
13	CEC
14	NC
15	DDC_SCL
16	DDC_SDA
17	GND
18	+5V
19	H-PLUG DETECT

HDMI interface

CN3	
PIN	NAME
1	USB+5V
2	Data-
3	Data+
4	NC
5	GND

CTP interface

CN4	
PIN	NAME
1	NC
2	BL_EN
3	BL_PWM
4	GND
5	GND

Backlight interface

- NOTES:
1. GENERAL TOLERANCE: ± 0.3
 2. () REFERENCE DIMENSION
 3. Important dimension: ①~③

LCD Type	10.1" TFT, Transmissive
Resolution	1280 (RGB) * 800
View Direction	All o'clock
LCD driver IC	HX8861
Color depth	16.7M
Interface types	HDMI & USB
Power Supply	12.0V/1A
With TP/Lens	without
Backlight	36 LEDs/with LED Driver
Surface luminance	900~1000 cd/m ²
Operating temperature	-20°C~70°C
Storage temperature	-30°C~80°C
Color chromaticity	[white] x:TBD/y:TBD.

版本 (Version)	变更记录 (Revise History)	日期 (Date)
A0	Initial release	2022.07.14

设计 (DESIGN)	Zahi
审核 (CHECKED)	Aron
批准 (APPROVED)	Aron
客户承认 (CUSTOMER APPROVAL)	



TITLE: LCM+PCBA	页面 (Page) 1 / 1
Drawing No. TSM101WXBH-69	单位 (Unit) mm
	比例 (SCALE) 1 : 1
	角度 (Angle)

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.

It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.



Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik

T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
E: austria@texim-europe.com



Nordic

Stockholmsgade 45
2100 Copenhagen

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com