


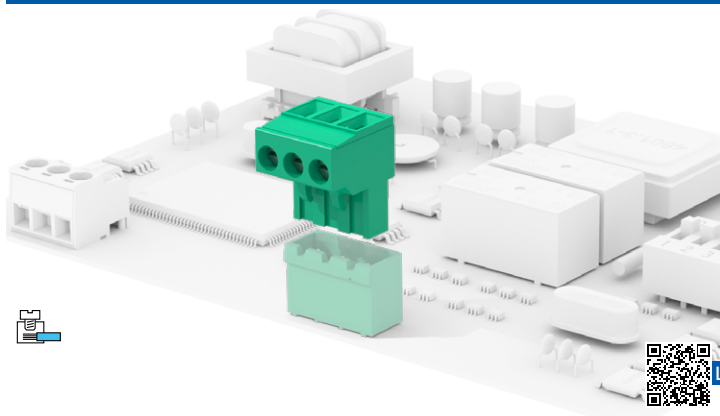

Last release

General data

Dimensional class:	medium
Standard colour:	green
Pitches:	metric 5, 7.5, 10 mm (.197, .295, .394 in) imperial 5.08, 7.62, 10.16 mm (.200, .300, .400 in)
Screw dimension:	M3
Recommended/highest tightening torque:	0.5/0.6 Nm (4.42/5.30 lbf-in)
Stripping length:	6 ÷ 7.5 mm (.24 ÷ .30 in)
Operating temperature range:	-40 °C ÷ +105 °C (-40 °F ÷ +221 °F)
Contact resistance:	<15 mΩ
Insulating material group:	I (CTI ≥ 600V)
Self-extinguishing class UL94:	V0
Insulation resistance:	>10 ⁹ Ω (500V DC)

Certifications

UL (n. E167473)

300 V - 15 A - 30÷12 AWG - for 5 mm, 5.08 mm, 7.5 mm and 7.62 mm pitch
 600 V - 15 A - 30÷12 AWG - for 10 mm and 10.16 mm pitch

VDE (n. 40027448)

250 V - 16 A - 2.5 mm² - for 5 mm and 5.08 mm pitch
 500 V - 16 A - 2.5 mm² - for 7.5 mm and 7.62 mm pitch
 750 V - 16 A - 2.5 mm² - for 10 mm and 10.16 mm pitch

IMQ (n. EM672)

300 V - 12 A - 2.5 mm² - for 5 mm and 5.08 mm pitch
 600 V - 12 A - 2.5 mm² - for 7.5 mm and 7.62 mm pitch
 1000 V - 12 A - 2.5 mm² - for 10 mm and 10.16 mm pitch




CSA (n. LR102896)

300 V - 15 A - 30÷12 AWG for 5 mm, 5.08 mm, 7.5 mm and 7.62 mm pitch
 600 V - 15 A - 30÷12 AWG for 10 mm and 10.16 mm pitch

Application values for end-use equipment have to be in accordance to norms and applicable to it.
 The certifications of some product's versions could be pending, for more detailed and updated data
 please refer to our web site www.sauro.net or your representative Sales Manager.

A higher number of poles is obtained by combining together **modular** parts.

Please see "CONNECTORS COMBINATIONS"

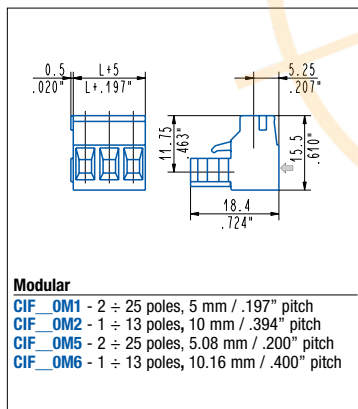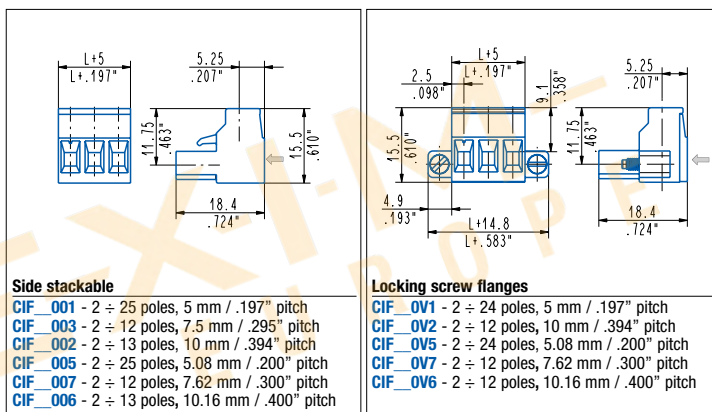

Usable with:

CIM

Page 71

CIMH

Page 73

CPM high

Page 75

CPM/CPMH

Page 76

CRM

Page 77

CIMH normo


Page 78

CGM

Page 79

CIF-LC1

Page 83

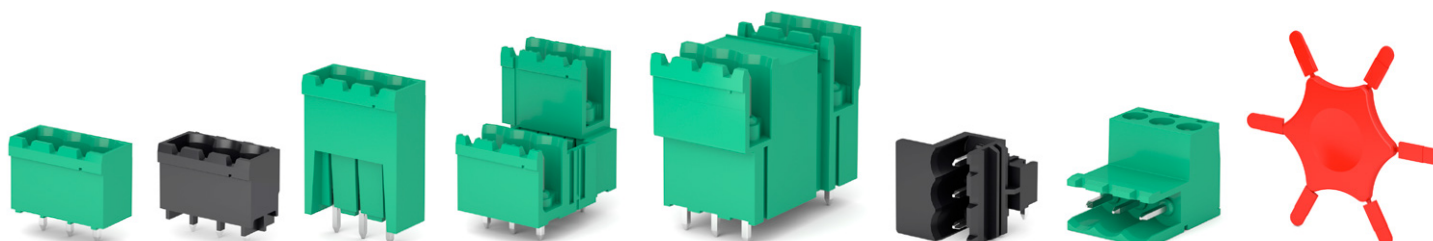

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.


It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

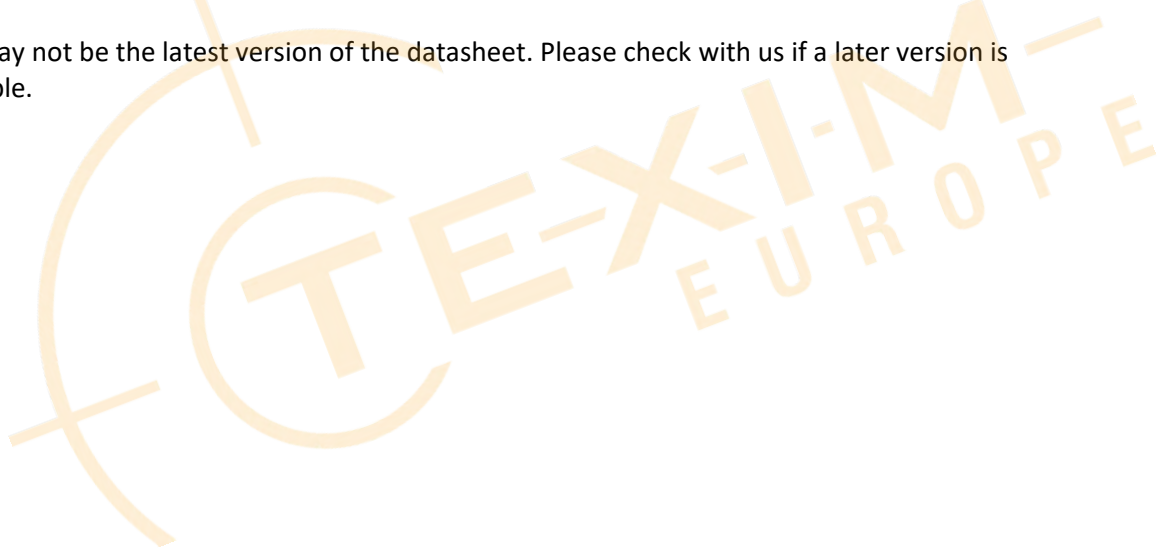



Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik


T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
E: austria@texim-europe.com



Nordic

Stockholmsgade 45
2100 Copenhagen

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com