

# TFT Module Specification

Distributed by:


[www.texim-europe.com](http://www.texim-europe.com)
**MODEL: 13-070XITBCBH1-S**

&lt; ◇ &gt; PRELIMINARY SPECIFICATION

&lt; ◆ &gt; APPROVAL SPECIFICATION

CUSTOMER
APPROVED BY
DATE:

DESIGNED	CHECKED	APPROVED
<div>RD</div> <div>2018.03.11</div> <div>趙長慶</div>	<div>PM</div> <div>2018.03.12</div> <div>呂家祥</div>	<div>批准</div> <div>2018.03.12</div> <div>PM</div>

DigiWise International Corporation

3F., No.10, Ln 83, Sec 1, Guang Fu Rd., Sanchong Dist., 24158,  
New Taipei City, Taiwan (ROC)

TEL : +886-2-29992866

FAX : +886-2-29990900

**RECORD OF REVISION**

Version	Revised Date	Page	Content
V1.0	2018/03/11	--	First Issued



## TABLE OF CONTENTS

No.	Content	Page
	TFT Module Specification .....	1
	TABLE OF CONTENTS .....	3
1.	GENERAL DESCRIPTION .....	4
2.	MECHANICAL SPECIFICATION .....	5
3.	PIN DESCRIPTION .....	6
4.	ABSOLUTE MAXIMUM RATINGS .....	8
5.	BLOCK DIAGRAM .....	9
6.	RELATIONSHIP BETWEEN DISPLAYED COLOR AND INPUT .....	10
7.	ELECTRICAL CHARACTERISTICS .....	11
8.	PROJECTED CAPACITIVE TOUCH PANEL SPECIFICATIONS .....	14
9.	OPTICAL CHARACTERISTICS .....	16
10.	RELIABILITY .....	19
11.	PRECAUTION RELATING PRODUCT HANDLING .....	24

## 1. GENERAL DESCRIPTION

### 1.1 Description

The specification is model 13-070XITBCBH1-S is a color active matrix thin film transistor (TFT) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a TFT LCD panel, a driving circuit, a backlight system and projected capacitive touch panel. This TFT LCD has a 7.0 (16:9) inch diagonally measured active display area with WSGA (1024 horizontal by 600 vertical pixels) resolution.

### 1.2 Features:

No.	Item	Specification	Unit
1	Panel Size	7.0"	Inch
2	Number of Pixels	1024 (W) x RGB x 600 (H)	Pixels
3	Active Area	154.21 (W) x 85.92 (H)	mm
4	Pixel Pitch	0.1506 (W) x 0.1432 (H)	mm
5	Outline Dimension	182.6 (W) x 117 (H) x 9.25 (T)	mm
6	Number of Colors	262K	- -
7	Display Mode	IPS / Normally Black / Transmissive	- -
8	Viewing Direction	Free direction	- -
9	Display Format	RGB vertical stripe	- -
10	Surface Treatment	Anti-Glare	- -
11	Contrast Ratio	600 (Typ.)	- -
12	Luminance (cd/m <sup>2</sup> )	600 (Typ.)	cd/m2
13	Interface	RGB 18-bit Interface	- -
14	Backlight	White LED	- -
15	Operation Temperature	-20 ~ 70	°C
16	Storage Temperature	-30 ~ 80	°C
17	Weight	TBD	g



### 3. PIN DESCRIPTION

Pin No.	Symbol	I/O	Function	Remark
1	GND	P	Ground	
2	GND	P	Ground	
3	ADJ	I	Brightness control for LED B/L	
4	VLED	P	Power Supply for LED Driver	
5	VLED	P	Power Supply for LED Driver	
6	VLED	P	Power Supply for LED Driver	
7	VCC	P	Power Supply for system	
8	VCC	P	Power Supply for system	
9	DE	I	Data Enable Timing Signal	
10	GND	P	Ground	
11	GND	P	Ground	
12	GND	P	Ground	
13	B5	I	Blue data signal (MSB)	
14	B4	I	Blue data signal	
15	B3	I	Blue data signal	
16	GND	P	Ground	
17	B2	I	Blue data signal	
18	B1	I	Blue data signal	
19	B0	I	Blue data signal (LSB)	
20	GND	P	Ground	
21	G5	I	Green data signal (MSB)	
22	G4	I	Green data signal	
23	G3	I	Green data signal	
24	GND	P	Ground	
25	G2	I	Green data signal	
26	G1	I	Green data signal	
27	G0	I	Green data signal (LSB)	
28	GND	P	Ground	
29	R5	I	Red data signal (MSB)	
30	R4	I	Red data signal	
31	R3	I	Red data signal	
32	GND	P	Ground	
33	R2	I	Red data signal	
34	R1	I	Red data signal	

35	R0	I	Red data signal (LSB)	
36	GND	P	Ground	
37	GND	P	Ground	
38	DCLK	I	Data Clock	
39	GND	P	Ground	
40	GND	P	Ground	



#### 4. ABSOLUTE MAXIMUM RATINGS

##### 4.1 Electrical Absolute Rating

##### 4.1.1 TFT LCD Module

Item	Symbol	Values		Unit	Note
		Min	Max.		
Power supply voltage	VCC	-0.3	4.0	V	
Power supply voltage	VLED	0	6.0	V	


##### 4.1.2 Environment Absolute Rating

Item	Symbol	Values			Unit	Note
		Min	Typ	Max.		
Operating Temperature	Topa	-20		70	°C	Ambient temperature
Storage Temperature	Tstg	-30		80	°C	



## 5. BLOCK DIAGRAM

### 5.1 TFT LCD Module

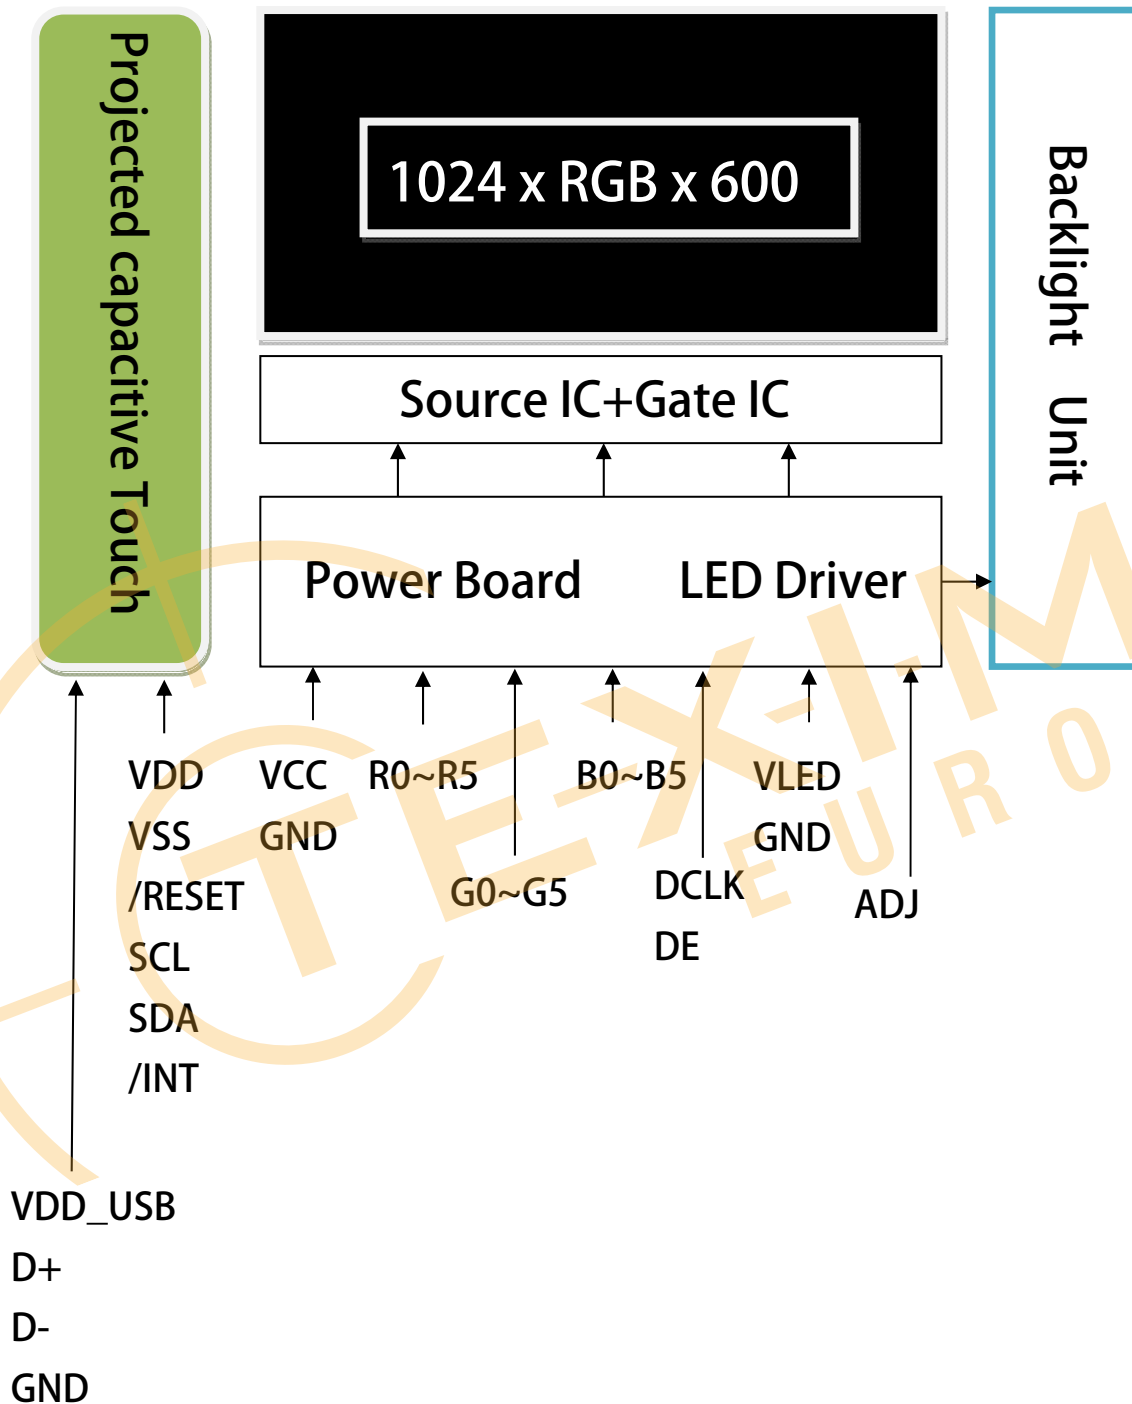

## 6. Relationship Between Displayed Color and Input

### 6.1 6 bit

	Display	MSB LSB R5 R4 R3 R2 R1 R0	MSB LSB G5 G4 G3 G2 G1 G0	MSB LSB B5 B4 B3 B2 B1 B0	Gray scale level
Basic color	Black	L L L L L L L	L L L L L L L	L L L L L L L	-
	Blue	L L L L L L L	L L L L L L L	H H H H H H H	-
	Green	L L L L L L L	H H H H H H H	L L L L L L L	-
	Light Blue	L L L L L L L	H H H H H H H	H H H H H H H	-
	Red	H H H H H H H	L L L L L L L	L L L L L L L	-
	Purple	H H H H H H H	L L L L L L L	H H H H H H H	-
	Yellow	H H H H H H H	H H H H H H H	L L L L L L L	-
	White	H H H H H H H	H H H H H H H	H H H H H H H	-
Gray scale of Red	Black	L L L L L L L	L L L L L L L	L L L L L L L	L0
	Dark ↑ ↓ Light	L L L L L H L	L L L L L L L	L L L L L L L	L1
		L L L L L L L	L L L L L L L	L L L L L L L	L2
		:	:	:	L3...L60
	Light	H H H H L H L	L L L L L L L	L L L L L L L	L61
		H H H H H H L	L L L L L L L	L L L L L L L	L62
	Red	H H H H H H H	L L L L L L L	L L L L L L L	Red L63
	Black	L L L L L L L	L L L L L L L	L L L L L L L	L0
Gray scale of Green	Dark ↑ ↓ Light	L L L L L L L	L L L L L L H	L L L L L L L	L1
		L L L L L L L	L L L L L H L	L L L L L L L	L2
		:	:	:	L3...L60
	Light	L L L L L L L	H H H H L H L	L L L L L L L	L61
		L L L L L L L	H H H H H H L	L L L L L L L	L62
	Green	L L L L L L L	H H H H H H H	L L L L L L L	Green L63
	Black	L L L L L L L	L L L L L L L	L L L L L L L	L0
	Dark ↑ ↓ Light	L L L L L L L	L L L L L L L	L L L L L H L	L1
		L L L L L L L	L L L L L L L	L L L H L L L	L2
Gray scale of Blue		:	:	:	L3...L60
	Light	L L L L L L L	L L L L L L L	H H H H L H L	L61
		L L L L L L L	L L L L L L L	H H H H H H L	L62
	Blue	L L L L L L L	L L L L L L L	H H H H H H H	Blue L63
	Black	L L L L L L L	L L L L L L L	L L L L L L L	L0
	Dark ↑ ↓ Light	L L L L L L H	L L L L L L H	L L L L L L H	L1
		L L L L L H L	L L L L L H L	L L L L H L L	L2
		:	:	:	L3...L60
Gray scale of White & Black	Light	H H H H L H L	H H H H L H L	H H H H L H L	L61
		H H H H H H L	H H H H H H L	H H H H H H L	L62
	White	H H H H H H H	H H H H H H H	H H H H H H H	White L63

## 7. ELECTRICAL CHARACTERISTICS

### 7.1 TFT LCD Module


Item		Symbol	Value			Unit	Note
			Min.	Typ.	Max.		
Power supply voltage		VCC	3.0	3.3	3.6	V	
		VLED	4.5	5	5.5	V	
Input Voltage for logic	H Level	VIH	0.7xVCC	-	VCC	V	
	L Level	VIL	0	-	0.3xVCC	V	
PWM frequency		ADJ	19K	20K	21k	Hz	Note2
Digital Current		ICC	-	120	150	mA	Note1
		ILED	-	500	600	mA	
LED Life Time (25°C)		-	-	50000	-	hr	Note3

Note 1: frame =60Hz, Ta=25°C, Display pattern: white pattern



Note 2: ADJ is brightness control Pin. The larger of the pulse duty is, the higher of the brightness.

ADJ signal is 0~3.3V. Operation frequency range is 20KHz


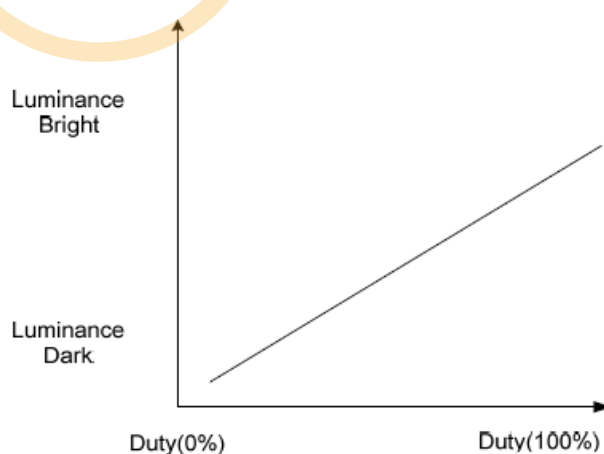


Note 3: The “LED life time” is defined as the module brightness decrease to 50% original brightness that the ambient temperature is 25°C 60% RH.


## 7.2 INTERFACE SPECIFICATIONS

### 7.2.1 DE mode Input signal characteristics

Signal	Parameter	Symbol	Min.	Typ.	Max.	Unit.	Note
DCLK	DCLK Frequency	fclk	40.8	51.2	67.2	MHz	
Horizontal	Horizontal display area	thd	-	1024	-	DCLK	
	HSD period time	th	1114	1344	1400	DCLK	
	HSD Blanking	thb+thfb	90	320	376	DCLK	
Vertical	Vertical display area	tvd	-	600	-	th	
	VSD period time	tv	610	635	800	th	
	VSD pulse width	tvb+tvfp	10	35	200	th	

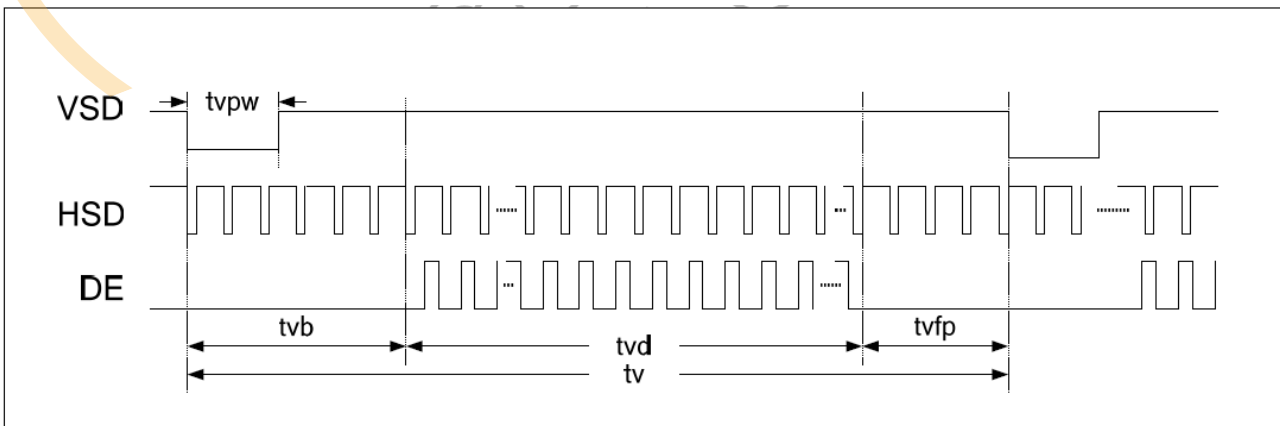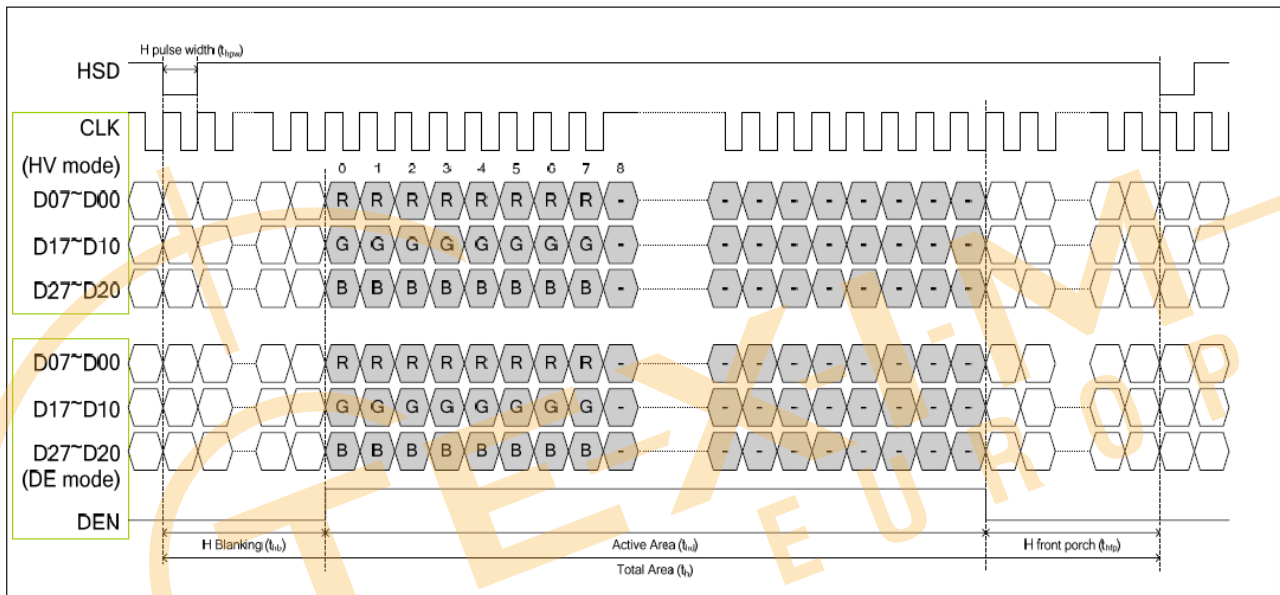

### 7.3 Power On / Off Sequence

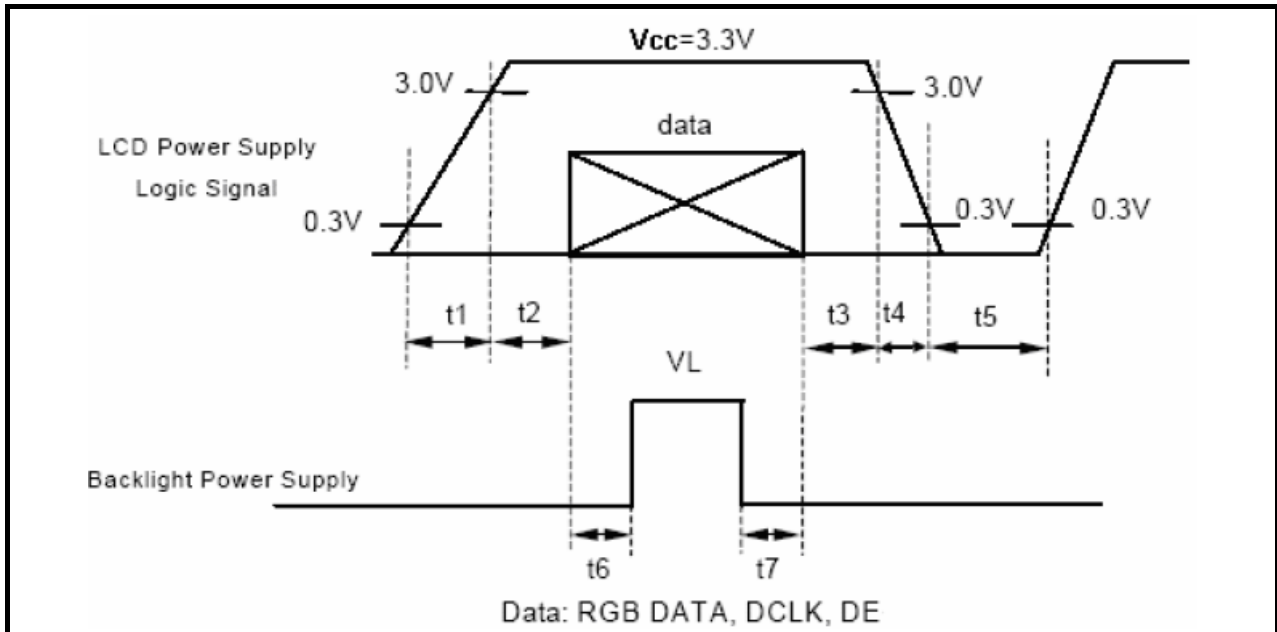

$t1 \leq 10ms : 1 sec \leq t5$   
 $50ms \leq t2 : 200ms \leq t6$   
 $0 < t3 \leq 50ms : 200ms \leq t7$   
 $0 < t4 \leq 10ms$

## 8. PROJECTED CAPACITIVE TOUCH PANEL

### 8.1 Main Feature

Item	Specification	Unit
Screen Size	7.0 inch	Diagonal
Type	Transparent Type Projected Capacitive	--
Input Mode	Human's Finger	--
Finger	5	--
Interface	I2C or USB	--
Cover glass pencil-hardness	7H	--
Response time	25	ms
Driver IC	ILI2511	

### 8.2 Pin Assignments and Definitions

Item	Name	I/O	Unit
1	GND	P	Ground
2	VDD	P	Power supply for I2C
3	SCL	I	I2C clock
4	SDA	I/O	I2C data
5	INT	O	Interrupt signal to inform the host processor that touch data is ready for read
6	RESET	I	External low signal reset the chip.
7	VDD_USB	P	Power supply for USB I/F
8	D+	I/O	USB interface
9	D-	I/O	USB interface
10	GND	P	Ground

(CN3)

Item	Name	I/O	Unit
1	GND	P	Ground
2	VDD	P	Power supply for I2C
3	SCL	I	I2C clock
4	SDA	I/O	I2C data
5	INT	O	Interrupt signal to inform the host processor that touch data is ready for read
6	RESET	I	External low signal reset the chip.

(CN4)

Item	Name	I/O	Unit
1	GND	P	Ground
2	VDD_USB	P	Power supply for USB I/F
3	GND	P	Ground
4	D+	I/O	USB interface
5	D-	I/O	USB interface




## 9. OPTICAL CHARACTERISTICS

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Brightness	--	Note1, Note 3, ( $\theta = 0^\circ$ ; Normal Viewing Angle)	480	600	--	cd/m <sup>2</sup>
Uniformity	B-uni		70	75	-	%
Contrast Ratio	CR		480	600	--	--
Response Time	Tr		--	4	8	ms
	Tf		--	12	24	ms
Color Chromaticity	White	Wx	0.260	0.310	0.360	--
		Wy	0.280	0.330	0.380	--
View angle	Horizontal	$\theta x+$	80	85	--	
		$\theta x-$	80	85	--	
	Vertical	$\theta Y+$	80	85	--	
		$\theta Y-$	80	85	--	

Note : The following optical specifications shall be measured in a darkroom or equivalent state (ambient luminance  $\leq 1$  lux, and at room temperature). The operation temperature is  $25^\circ\text{C} \pm 2^\circ\text{C}$ . The measurement method is shown in Note1.

Note1: The method of optical measurement:

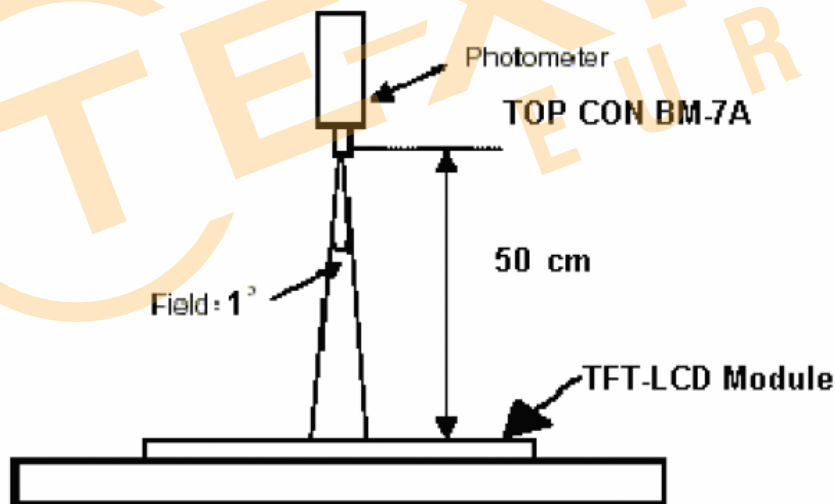

Note2: Measured at the center area of the panel and at the viewing angle of the  $\theta x = \theta y = 0^\circ$

Note3: Definition of Contrast Ratio (CR):

CR = Luminance with all pixels in white state  $\div$  Luminance with all pixels in Black state



Normal  
 $\theta_x = \theta_y = 0^\circ$

$\theta_x = 90^\circ$  x-  
 6 o'clock  
 $\theta_y = 90^\circ$  y-

12 o'clock direction  
 $\theta_y = 90^\circ$


x+  $\theta_x = 90^\circ$

The diagram shows a rectangular plate with a coordinate system. The x-axis is horizontal and the y-axis is vertical. The origin is at the center of the plate. The x-axis is labeled x- on the left and x+ on the right. The y-axis is labeled y- at the bottom and y+ at the top. The plate is shown in a perspective view, with the top surface and the edges visible. The angles  $\theta_x$  and  $\theta_y$  are indicated by curved arrows.  $\theta_x = 0^\circ$  and  $\theta_y = 0^\circ$  are labeled at the top.  $\theta_x = 90^\circ$  and  $\theta_y = 90^\circ$  are labeled at the bottom. The 12 o'clock direction is indicated by a vertical arrow pointing upwards. The 6 o'clock direction is indicated by a vertical arrow pointing downwards.

Distributed by [www.texim-europe.com](http://www.texim-europe.com)

**Note 6: Definition of Response Time:**

The Response Time is set initially by defining the “Rising Time ( $T_r$ )” and the “Falling Time ( $T_f$ )” respectively.  $T_r$  and  $T_f$  are defined as following figure

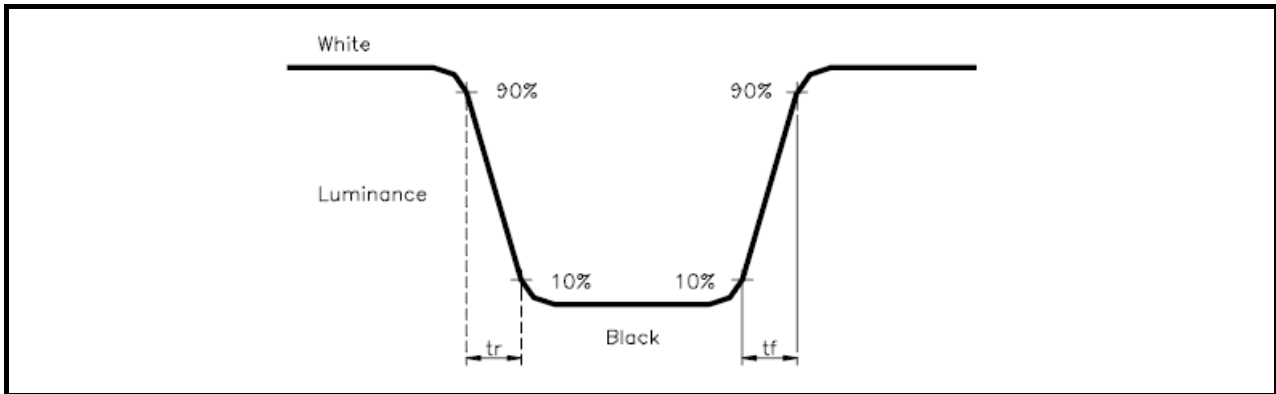**Note 7: Definition of Chromaticity:**

The color coordinates ( $W_x, W_y$ ), ( $R_x, R_y$ ), ( $G_x, G_y$ ), and ( $B_x, B_y$ ) are obtained with all pixels in the viewing field at white, red, green, and blue states, respectively.

## 10. RELIABILITY

### 10.1 Test Condition

#### 10.1.1 Temperature and Humidity(Ambient Temperature)

Temperature :  $25 \pm 5^{\circ}\text{C}$

Humidity :  $65 \pm 5\%$

#### 10.1.2 Operation

Unless specified otherwise, test will be conducted under function state.

#### 10.1.3 Container

Unless specified otherwise, vibration test will be conducted to the product itself without putting it in a container.

#### 10.1.4 Test Frequency

In case of related to deterioration such as shock test. It will be conducted only once.

### 10.2 TESTS

No.	ITEM	CONDITION CRITERION
1	High Temperature Storage	80°C, 120 hrs
2	Low Temperature Storage	-30°C, 120 hrs
3	High Temperature Operating	70°C, 120 hrs
4	Low Temperature Operating	-20°C, 120 hrs
5	High Temperature/Humidity Non-Operating	50°C, 90%RH, 120 hrs
6	Temperature Shock Non-Operating	-30°C $\longleftrightarrow$ 70°C (0.5hr each), 25 cycles
7	Vibration Test Non-Operating	Frequency:0 ~ 55 Hz Amplitude:1.5 mm Sweep Time:11min Test Period:6 Cycles for each Direction of X,Y,Z
9	Electro-static Discharge Non-Operating	150pF,330Ω Air:± 8KV;Contact: ±4KV 10 times/point;4 points/panel face

Note1: The test sample have recovery time for 24 hours at room temperature before the function check. In the standard conditions, there is no any touch panel function NG issue occurred.

### 10.3 JUDGMENT STANDARD

The judgment of the above test should be made as follow:

Pass: Normal display image with no obvious non-uniformity and no line defect. Partial transformation of the module parts should be ignored.

Fail: No display image, obvious non-uniformity, or line defects.



## 10.4 INCOMING INSPECTION STANDARDS

No.	Parameter	Criteria															
1	Operating	Display function: No Display malfunction (Major)															
		Contrast ratio (Black, White): Does not meet specified range in the spec. (Major) (Note:3)															
		Line Defect: No obvious Vertical and Horizontal line defect in bright, dark and colored. (Major) (Note:1)															
		Point Defect : Active area $\leq 5$ dots (Minor) (Note:1)															
		<table><tr><th rowspan="2">Item</th><th>Acceptable number</th><th rowspan="2">Total</th></tr><tr><th>Active Area</th></tr><tr><td>Bright</td><td>2</td><td rowspan="2">5</td></tr><tr><td>Dark</td><td>4</td></tr></table>	Item	Acceptable number	Total	Active Area	Bright	2	5	Dark	4						
		Item		Acceptable number		Total											
			Active Area														
		Bright	2	5													
		Dark	4														
		Non-uniformity: Visible through 5%ND filter. (Minor)															
Foreign material in Black or White spots shape ( $W>1/4L$ )																	
<table><tr><th>Zone</th><th rowspan="2">Acceptable number</th><th rowspan="2">Class Of Defects</th><th rowspan="2">AQL Level</th></tr><tr><th>Dimension</th></tr><tr><td><math>D&gt;0.5</math></td><td>0</td><td rowspan="3">Minor</td><td rowspan="3">1.5</td></tr><tr><td><math>0.3 &lt; D \leq 0.5</math></td><td>5</td></tr><tr><td><math>D \leq 0.3</math></td><td>*</td></tr></table>	Zone	Acceptable number	Class Of Defects	AQL Level	Dimension	$D>0.5$	0	Minor	1.5	$0.3 < D \leq 0.5$	5	$D \leq 0.3$	*				
Zone	Acceptable number				Class Of Defects	AQL Level											
Dimension																	
$D>0.5$	0	Minor	1.5														
$0.3 < D \leq 0.5$	5																
$D \leq 0.3$	*																
$D = (\text{Long} + \text{Short}) / 2$ * : Disregard																	
Foreign Material in Line or spiral shape ( $W \leq 1/4L$ ) (Note: 4)																	
<table><tr><th>L (mm)</th><th>Zone</th><th rowspan="2">Acceptable number</th><th rowspan="2">Class Of Defects</th><th rowspan="2">AQL Level</th></tr><tr><th>W(mm)</th></tr><tr><td><math>L &gt; 5</math></td><td><math>W &gt; 0.1</math></td><td>0</td><td rowspan="3">Minor</td><td rowspan="3">1.5</td></tr><tr><td><math>0.5 &lt; L \leq 5</math></td><td><math>0.03 &lt; W \leq 0.1</math></td><td>5</td></tr><tr><td><math>L \leq 0.5</math></td><td><math>W \leq 0.03</math></td><td>*</td></tr></table>	L (mm)	Zone	Acceptable number	Class Of Defects	AQL Level	W(mm)	$L > 5$	$W > 0.1$	0	Minor	1.5	$0.5 < L \leq 5$	$0.03 < W \leq 0.1$	5	$L \leq 0.5$	$W \leq 0.03$	*
L (mm)	Zone	Acceptable number				Class Of Defects	AQL Level										
W(mm)																	
$L > 5$	$W > 0.1$	0	Minor	1.5													
$0.5 < L \leq 5$	$0.03 < W \leq 0.1$	5															
$L \leq 0.5$	$W \leq 0.03$	*															
$L$ : Length $W$ : Width    * : Disregard																	
2	External Inspection (non-operating)	Dimension: Outline (Major)															
		Bezel appearance: uneven (Minor)															
		Scratch on the polarize: (Note:2)															
		<table><tr><th>L (mm)</th><th>Zone</th><th rowspan="2">Acceptable number</th><th rowspan="2">Class Of Defects</th><th rowspan="2">AQL Level</th></tr><tr><th>W(mm)</th></tr><tr><td>--</td><td><math>W &gt; 0.1</math></td><td>0</td><td rowspan="2">Minor</td><td rowspan="2">1.5</td></tr><tr><td><math>L \leq 3</math></td><td><math>W \leq 0.1</math></td><td>3</td></tr></table>	L (mm)	Zone	Acceptable number	Class Of Defects	AQL Level	W(mm)	--	$W > 0.1$	0	Minor	1.5	$L \leq 3$	$W \leq 0.1$	3	
		L (mm)	Zone	Acceptable number				Class Of Defects	AQL Level								
		W(mm)															
		--	$W > 0.1$	0	Minor	1.5											
		$L \leq 3$	$W \leq 0.1$	3													
		$L$ : Length $W$ : Width    * : Disregard															
		Dent or bubble on the polarize (Note:2)															
<table><tr><th>Zone</th><th rowspan="2">Acceptable number</th><th rowspan="2">Class Of Defects</th><th rowspan="2">AQL Level</th></tr><tr><th>Dimension</th></tr><tr><td><math>D \leq 0.3</math></td><td>*</td><td rowspan="2">Minor</td><td rowspan="2">1.5</td></tr><tr><td><math>D \leq 0.5</math></td><td>3</td></tr></table>	Zone	Acceptable number	Class Of Defects	AQL Level	Dimension	$D \leq 0.3$	*	Minor	1.5	$D \leq 0.5$	3						
Zone	Acceptable number				Class Of Defects	AQL Level											
Dimension																	
$D \leq 0.3$	*	Minor	1.5														
$D \leq 0.5$	3																
$D = (\text{Long} + \text{Short}) / 2$ * : Disregard																	

Class of defects	Major	AQL 0.65%	Definition
	Minor	AQL 1.5%	Definition
			It is a defect that is likely to result in failure or to reduce materially the usability of the product for the intended function.
			It is a defect that will not result in functioning problem with deviation classified.

**Note1:**

(a) Bright point defect is defined as point defect of R,G,B with area  $>1/2$  pixel respectively

(b) Dark point defect is defined as visible in full white pattern.

(c) Definition of distribution of point defect is as follows:

- minimum separation between dark point defects should be larger than 5mm.
- minimum separation between bright point defects should be larger than 5mm.


(d) Definition of joined bright point defect and joined dark point defect are as follows:

- Two or more joined bright point defects must be nil.
- Three joined dark point defects must be nil.
- Coupling of one dark and one bright point in junction is counted as one dark and bright spot with 1 pair maximum.
- Two Joined dark point is counted as two dark points with 2 pair maximum.

**Note2:** The external inspection should be conducted at the distance  $30 \pm 5$  cm between the eyes of inspector and the panel.

**Note3:** Luminance measurement for contrast ratio is at the distance  $50 \pm 5$  cm between the detective head and the panel with ambient luminance less than 1 lux. Contrast ratio is obtained at optimum view angle.

**Note4:** W-Width in mm , L-length of Max.(L1,L2) in mm.

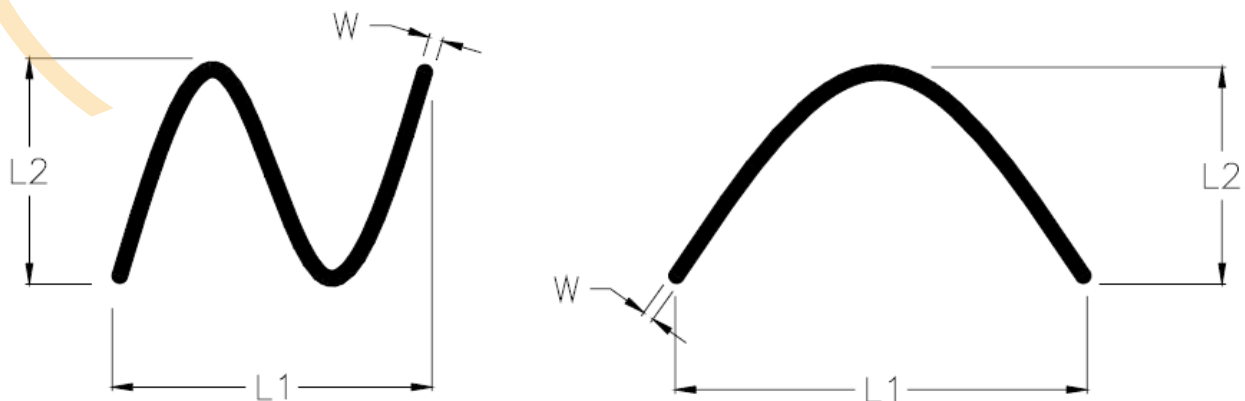

### 10.5 Sampling Condition

Unless otherwise agree in written, the sampling inspection shall be applied to the incoming inspection of customer.

Lot size: Quantity of shipment lot per model.

Sampling type: normal inspection, single sampling

Sampling table: MIL-STD-105E


Inspection level: Level II

### 10.6 Inspection conditions

The LCD shall be inspected under 40W white fluorescent light.

$\theta \leq 45^\circ$  inspection under non-operating condition.

$\theta \leq 5^\circ$  inspection under operating condition

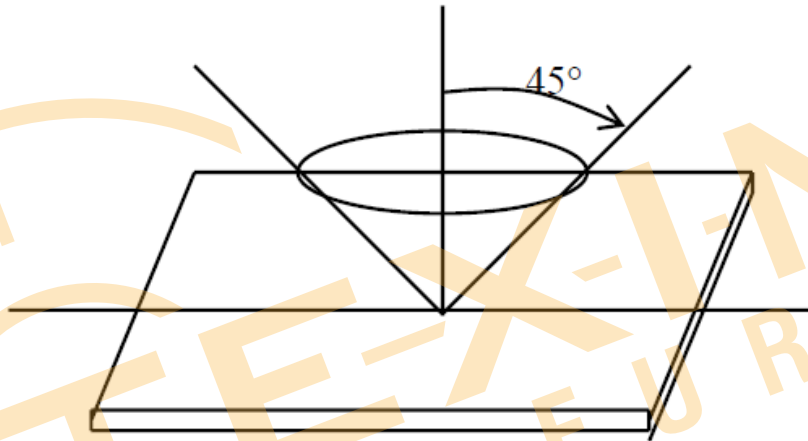

## 11. PRECAUTION RELATING PRODUCT HANDLING

### 11.1 SAFETY

- 11.1.1 If the LCD panel breaks , be careful not to get the liquid crystal to touch your skin.
- 11.1.2 If the liquid crystal touches your skin or clothes , please wash it off immediately by using soap and water.

### 11.2 HANDLING

- 11.2.1 Avoid any strong mechanical shock which can break the glass.
- 11.2.2 Avoid static electricity which can damage the CMOS LSI—When working with the module, be sure to ground your body and any electrical equipment you may be using.
- 11.2.3 Do not remove the panel or frame from the module.
- 11.2.4 The polarizing plate of the display is very fragile. So , please handle it very carefully, Do not touch, push or rub the exposed polarizing with anything harder than an HB pencil lead (glass , tweezers , etc.)
- 11.2.5 Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of plate.
- 11.2.6 Do not touch the display area with bare hands , this will stain the display area.
- 11.2.7 Do not use ketonics solvent & aromatic solvent. Use with a soft cloth soaked with a cleaning naphtha solvent.
- 11.2.8 To control temperature and time of soldering is  $280 \pm 10^{\circ}\text{C}$  and 3-5 sec.
- 11.2.9 To avoid liquid (include organic solvent) stained on LCM.
- 11.3 STORAGE
- 11.3.1 Store the panel or module in a dark place where the temperature is  $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$  and the humidity is below 65% RH.
- 11.3.2 Do not place the module near organics solvents or corrosive gases.
- 11.3.3 Do not crush, shake, or jolt the module.



## **Disclaimer**

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.

It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.





## Headquarters & Warehouse

Elektrostraat 17  
NL-7483 PG Haaksbergen  
The Netherlands

T: +31 (0)53 573 33 33  
E: [info@texim-europe.com](mailto:info@texim-europe.com)  
Homepage: [www.texim-europe.com](http://www.texim-europe.com)



### The Netherlands

Elektrostraat 17  
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33  
E: [nl@texim-europe.com](mailto:nl@texim-europe.com)



### Belgium

Zuiderlaan 14, box 10  
B-1731 Zellik

T: +32 (0)2 462 01 00  
E: [belgium@texim-europe.com](mailto:belgium@texim-europe.com)



### UK & Ireland

St Mary's House, Church Lane  
Carlton Le Moorland  
Lincoln LN5 9HS

T: +44 (0)1522 789 555  
E: [uk@texim-europe.com](mailto:uk@texim-europe.com)



### Germany

Bahnhofstrasse 92  
D-25451 Quickborn

T: +49 (0)4106 627 07-0  
E: [germany@texim-europe.com](mailto:germany@texim-europe.com)



### Germany

Martin-Kollar-Strasse 9  
D-81829 München

T: +49 (0)89 436 086-0  
E: [muenchen@texim-europe.com](mailto:muenchen@texim-europe.com)



### Austria

Warwitzstrasse 9  
A-5020 Salzburg

T: +43 (0)662 216 026  
E: [austria@texim-europe.com](mailto:austria@texim-europe.com)



### Nordic

Stockholmsgade 45  
2100 Copenhagen

T: +45 88 20 26 30  
E: [nordic@texim-europe.com](mailto:nordic@texim-europe.com)



### Italy

Martin-Kollar-Strasse 9  
D-81829 München

T: +49 (0)89 436 086-0  
E: [italy@texim-europe.com](mailto:italy@texim-europe.com)