# 1.20.810.560/0000





# E-BOX XL MODULAR, housing, 6 installation points, 22.3 mm, M20 to the side, light gray

#### NEW



## Description

The E-BOX XL MODULAR as a supplement to the E-BOX MODULAR is an enclosure concept with 3 to 6 installation points for all RAFIX 22 FS+/FSR control devices. It is used where individual control devices are required at remote locations - for example, emergency stop applications along a production line or at a safety fence. The compact dimensions of the E-BOX XL are based on the edge dimensions of a 40 mm profile rail. Installation is quick and easy - thanks to the modular system consisting of the lower and upper housing sections, QC contact blocks and RAFIX 22 FS+/FSR actuators, which are installed and wired manually.

#### Individually configurable and combinable

- Use of RAFIX 22 FS+ actuators and RAFIX 22 FS QC switching elements for any installation location
- > Manual wiring with cable gland (Ø 7-13mm clamping range)
- RAFIX 22 FS+ / RAFIX 22 FSR actuating elements, RAFIX 22 FS+ QC switching elements, LED clips and blade receptacles must be purchased separately

#### Scope of delivery

Lower housing section, upper housing section, cable gland, emergency stop adhesive label and screws for the housing connection

#### Assembly

Detailed installation instructions for the E-BOX XL MODULAR are available in the "Downloads" section.



### technical data

#### > general

Scope of delivery Installation points Color Quick-Start-Guide 6 pcs. light gray

The information in this data sheet only contains general descriptions and / or performance features, which may not apply precisely as described to the respective application, and which my change due to further product enhancements. The technical data, illustrations and other information about our products are the mere results of individual technical testing. These descriptions and other product features are only binding if they expressly agreed upon at the time of the conclusion of a binding contract. In all other cases, we reserve the right to make technical changes as well as changes of availability. Pictures and other graphic illustrations are approximations only. All product names may be trademarks or brand names of the RAFI Group or any other sub-supplier of RAFI. The use of such by any third parties for their own purposes may infringe the rights of the respective entity holding those rights. **date**: Jun 16, 2025 **page**: 1/4

#### RAFI GmbH & Co. KG

#### technical data sheet







Operating temperature, min.	www.texim-europe.com -25 ℃	
Operating temperature, min.	2F °C	
	-25 C	
Operating temperature, max.	70 °C	direct links
Storage temperature, min.	-40 °C	> RAFI eCa
Storage temperature, max.	80 °C	
Packaging	Box	
Packaging unit	1 pcs.	
net weight	290 g	
Degree of protection, front side, according to DIN EN 60529	IP65	
Degree of protection, rear side, according to DIN EN 60529	IP65	
Impact resistance IK	07	
Protection class	II	
Minimum order quantity (MOQ)	5 pcs.	
RoHS compliant	Yes	
REACH compliant	Yes	
> mounting diameters		
Outside dimension, length	357 mm	
Outside dimension, width	42 mm	
Outside dimension, height	40 mm	
Mounting hole	22.3 mm	
> mechanical data		
Fixing	Screw	
Terminal on the rear	M20 to the side	

#### RAFI GmbH & Co. KG

technical data sheet


# 1.20.810.560/0000






# drawings

#### **Dimensioned drawing**



#### **Dimensioned drawing**

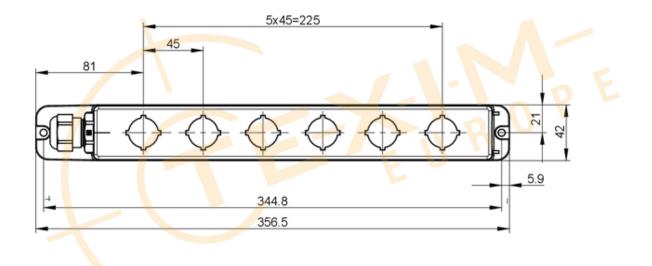

#### RAFI GmbH & Co. KG


technical data sheet








#### System drawing

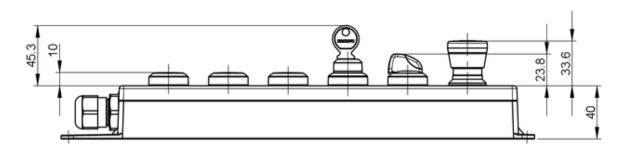

#### System drawing

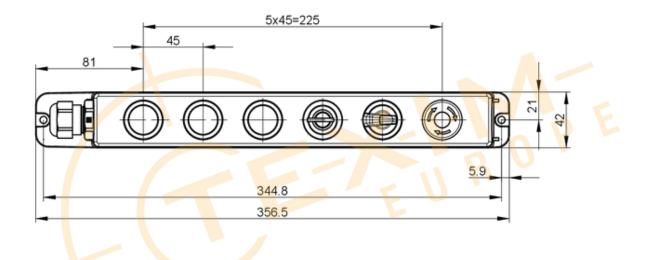

#### RAFI GmbH & Co. KG

#### **Disclaimer**

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.

It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.





# Headquarters & Warehouse

Elektrostraat 17 NL-7483 PG Haaksbergen The Netherlands

T:	+31 (0)53 573 33 33
E:	info@texim-europe.com
Homepage:	www.texim-europe.com





## Germany

Bahnhofstrasse 92 D-25451 Quickborn

T: +49 (0)4106 627 07-0 E: germany@texim-europe.com



The Netherlands

NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33

E: nl@texim-europe.com

Elektrostraat 17

## Germany

Martin-Kollar-Strasse 9 D-81829 München

T: +49 (0)89 436 086-0 E: muenchen@texim-europe.com

# Belgium

Zuiderlaan 14, box 10 B-1731 Zellik

T: +32 (0)2 462 01 00 E: belgium@texim-europe.com

## **UK & Ireland**

St Mary's House, Church Lane Carlton Le Moorland Lincoln LN5 9HS

T: +44 (0)1522 789 555 E: uk@texim-europe.com



Austria

Warwitzstrasse 9 A-5020 Salzburg

T: +43 (0)662 216 026 E: austria@texim-europe.com



Stockholmsgade 45 2100 Copenhagen

T: +45 88 20 26 30 E: nordic@texim-europe.com



Martin-Kollar-Strasse 9 D-81829 München

T: +49 (0)89 436 086-0 E: italy@texim-europe.com

2025

www.texim-europe.com

Т<-A TKH TECHNOLOGY COMPANY <