



NC3FXX-14-B-D

3 pole female cable connector for 8 mm - 10 mm cable O.D. with black metal housing and gold contacts

Special version of the XLR cable connector XX Series for large cable diameters. Incorporating all features of the XX Series.

Bulk packed, to be ordered in multiples of 100.

Features & Benefits

- ✓ Unique cage design of female contact for low contact resistance and high integrity
- ✓ Female contact incorporates a solder barrier to prevent solder running into the contact mating area
- ✓ Female connector with improved solid metal latch which is larger and easier to handle
- ✓ Additional ground spring contacts for better shell ground continuity
- ✓ Improved chuck type strain relief provides higher pull-out force and makes assembly easier and faster
- ✓ Boot with polyurethane gland gives high protection to cable bending stresses
- ✓ Colored rings and boots available for coding or identification
- ✓ Sleek and ergonomic design - valuable and handy
- ✓ Rugged zinc diecast shell, longlasting and dependable

Technical Information

Product	
Title	NC3FXX-14-B-D
Gender	female

Electrical	
Capacitance between contacts	$\leq 4 \text{ pF}$
Contact resistance	$\leq 3 \text{ m}\Omega$
Dielectric strength	1,5 kVdc
Insulation resistance	$> 10 \text{ G}\Omega$ (initial)
Rated current per contact	16 A
Rated voltage	$< 50 \text{ V}$

Mechanical	
Cable O.D.	8 mm - 10 mm
Insertion force	$\leq 20 \text{ N}$
Withdrawal force	$\leq 20 \text{ N}$
Lifetime	> 1000 mating cycles
Wiresize	max. 2.5 mm^2
Wiresize	max. 14 AWG

Material	
Shell coating	Black KTL
Locking element plating	Nickel

Environmental	
Standard compliance	IEC 61076-2-103
Temperature range	-30 °C to +80 °C



Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.


It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

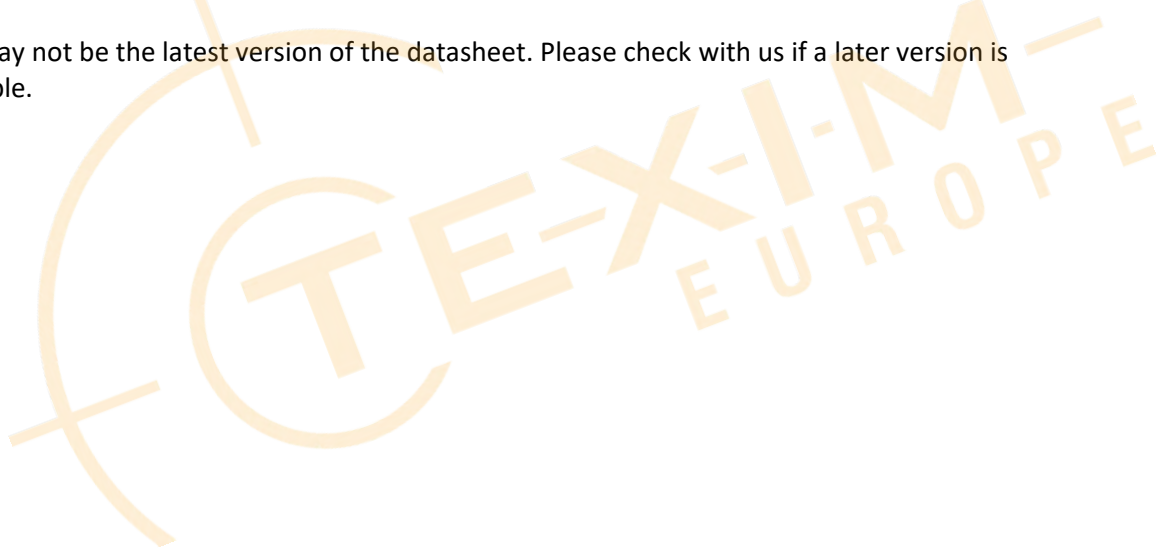



Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik


T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
E: austria@texim-europe.com



Nordic

Stockholmsgade 45
2100 Copenhagen

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com