




NC5FBH1

This series not only stands out with its proven features such as a compact design, flame retardancy in accordance with UL94-V0, and excellent electrical performance but also incorporates an innovative, enhanced contact system. This new design offers additional advantages, particularly in terms of vibration resistance. Thanks to these improvements, the new products are perfectly suited to meet the demands of challenging applications, providing you with reliable solutions for your needs.

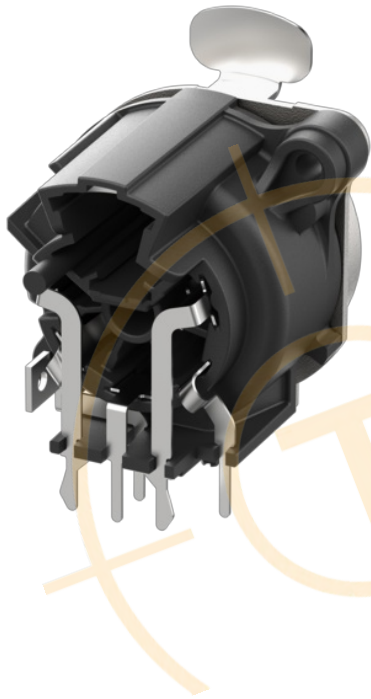

Features & Benefits

- ✓ Smallest XLR receptacles
- ✓ highest packing density
- ✓ New enhanced contact system
- ✓ Metal mounting flange featuring continuous circumferential ground contact to chassis for best EMC and RF protection

✓ Flame retardant (V0, halogen free)

Distributed by:



Technical Information

Product	
Title	NC5FBH1
Product family	xlrCON
Connection type	chassis connector
Gender	female

Electrical	
Capacity between contacts	$\leq 7 \text{ pF}$
Contact resistance	$\leq 12 \text{ m}\Omega$
Dielectric strength	1,5 kVdc
Insulation resistance	$> 10 \text{ G}\Omega$ (initial)
Rated current per contact	3 A
Rated voltage acc. to UL1977	50 VAC
Grounding Options	Seperate ground contact connected to mating connector shell and front panel, no connection to Pin 1

Mechanical	
Insertion force	$\leq 20 \text{ N}$
Withdrawal force	$\leq 20 \text{ N}$
Lifetime	min. 1000 mating cycles
Locking device	Latch lock
Wiring	Horizontal PCB mount
Chassis shape	B
Mounting direction	rear mounting
Mounting	A-Screw

Material	
Contact	Bronze (CuSn6)
Contact plating	partial gold / Ni / Tin
Insert	PA66
Locking element	Steel Ck67
Locking element plating	Nickel
Ring	Zinc diecast (ZnAl4Cu1)
Ring plating	Nickel

Environmental	
Flammability	UL 94 V0
Standard compliance	IEC 61076-2-103
Solderability	Complies with IEC 60068-2-20
Temperature range	-30 °C to +80 °C

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.


It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

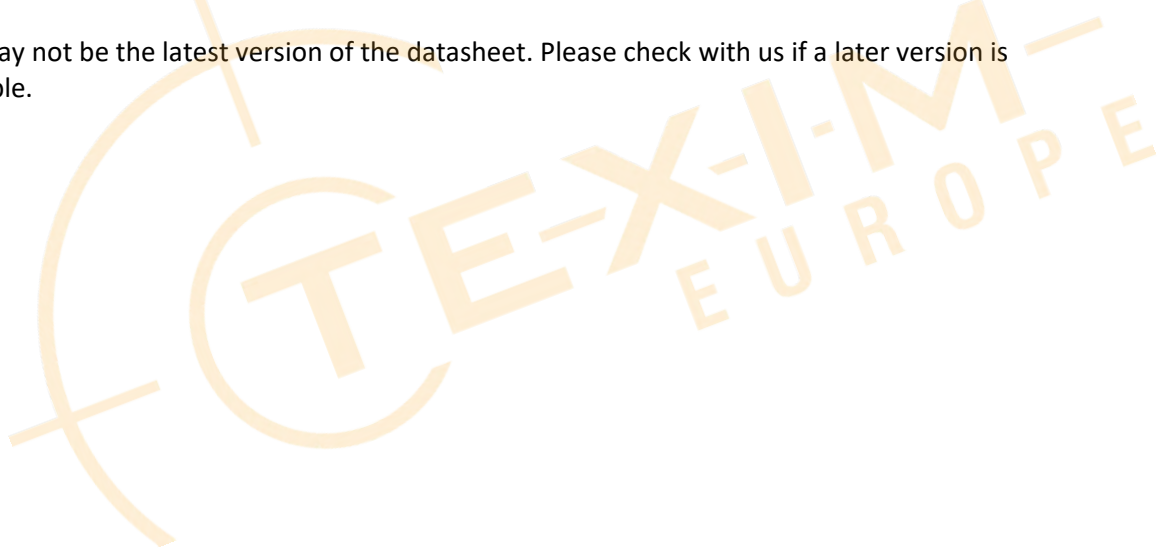



Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik

T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
E: austria@texim-europe.com



Nordic

Stockholmsgade 45
2100 Copenhagen

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com