


de next-RAP8

86mm x 55mm Single Board with 13th Generation Intel® Core™ i7/i5/i3 Processor

Distributed by:

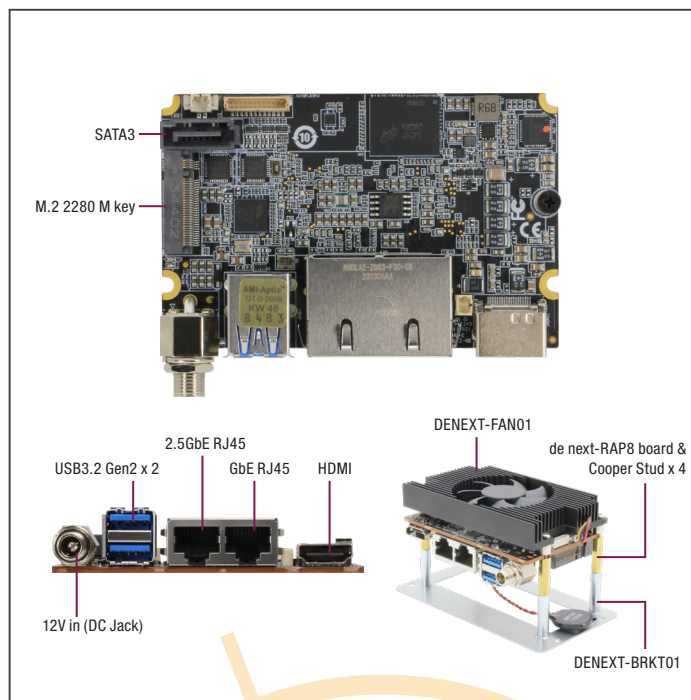

Features

- Onboard 13th Gen. Intel® Core™ Series Processor, TDP 15W
- Onboard LPDDR5x up to 16GB
- HDMI 1.4b x 1, eDP x 1
- 2.5GbE RJ45 x 1, GbE RJ45 x 1
- USB 3.2 Gen 2 x 2, USB 2.0 x 4
- M.2 2280 M-Key x 1 (PCIe [x2]), PCIe Gen 3 [x4] via FPC x 1
- DC 12Vin

Video	eDP x 1
SATA	SATA 6Gb/s x 1 +5V SATA Power Connector x 1
Audio	—
DIO/GPIO	8-Bit
SMBus/I2C	Optional
Touch	—
Fan	4 Pin Smart Fan (with Cooler version only)
Sim	—
Front Panel	PowerLED, Power Button, Buzzer, Reset Button
Others	—
Expansion	
Mini PCIe/mSATA	—
M.2	M.2 2280 M-Key x 1 (PCIe [x2]) PCIe Gen 3 [x4] via FPC x 1
Others	—
Environment & Certification	
Operating Temp.	32°F ~ 140°F (0°C ~ 60°C)
Storage Temp.	-40°F ~ 176°F (-40°C ~ 80°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
MTBF (Hours)	1,679,950
EMC	CE/FCC Class A

Specifications

System	
Form Factor	86mm x 55mm, Single board computer
CPU	13th Generation Intel® Core™ Processors: Intel® Core™ i7-1365UE (10C/12T, 1.70 GHz, up to 15W) Intel® Core™ i5-1335UE (10C/12T, 1.30 GHz, up to 15W) Intel® Core™ i3-1315UE (6C/8T, 1.20 GHz, up to 15W)
Chipset	Integrated with Intel® SoC
Memory Type	Onboard LPDDR5x, up to 16GB
BIOS	UEFI
Wake on LAN	Yes
Watchdog Timer	255 Levels
Security	fTPM
RTC Battery	Lithium Battery 3V/240mAh
Dimensions	3.38" x 2.17" (86mm x 55mm)
OS Support	Windows 10 (64-bit) Ubuntu 22.04.3 (Kernel 6.2)
Power	
Power Requirement	+12V
Power Supply Type	AT/ATX (Default : AT mode)
Connector	DC Jack Connector
Power Consumption	Intel® Core™ i7-1365UE, LPDDR4x 16GB, 3.18A @12V, 38.16W (Typical) Intel® Core™ i7-1365UE, LPDDR4x 16GB, 3.36A @12V, 39.16W (Max)
Display	
Controller	Intel® Iris® Xe
LVDS/eDP	eDP 1.4 x 1, up to 3840 x 2160
Display Interface	HDMI 1.2a x 1, up to 1920 x 1080 @60Hz
Multiple Display	Up to Dual Displays
Audio	
Codec	—
Audio Interface	—
Speaker	—
External I/O	
Ethernet	Intel® Ethernet Connection I219-LM, GbE RJ-45 x 1 Intel® Ethernet Controller I226-LM, 2.5GbE x 1
USB	Rear I/O : USB3.2 Gen2 Type A x 2
Serial Port	—
Video	HDMI 1.4b x 1
Internal I/O	
USB	USB 2.0 x 4 (Pin Header)
Serial Port	RS-232/422/285 x 2 (Pin Header)

Packing List


- de next-RAP8 x 1
- Copper stud.M2.5mm x 4

Optional Accessories

Part Number	Description	QTY
170X000512	de next cable for USB2.0 x 4, COM Port x 2, DIO 8 bit	1
170X000577	de next cable for USB 2.0 x 2, COM Port x 2, DIO 8 bit, adapter card connector	1
1709070200	SATA Cable,180D.Length 20cm	1
170X000322	SATA Power Cable.Length 6cm	1
DENEXT-FAN01	CPU cooler for de next-TGU8	1
DENEXT-BRKT01	Easy bracket for de next series use	1
DENEXT-HSP01	Heatspreader for de next-TGU8	1
PER-T642-A03-0001	M.2 M 2280 adaptor card to M.2 B key 2242 & M.2 E key 2230	1
PER-T643-A01-0001	M.2 M 2280 adaptor card to M.2 B key 2242 & M.2 B key 3052	1
PER-R41P-A02-0001	PCIe[x4] adapter card with FPC cable kit	1




Block Diagram

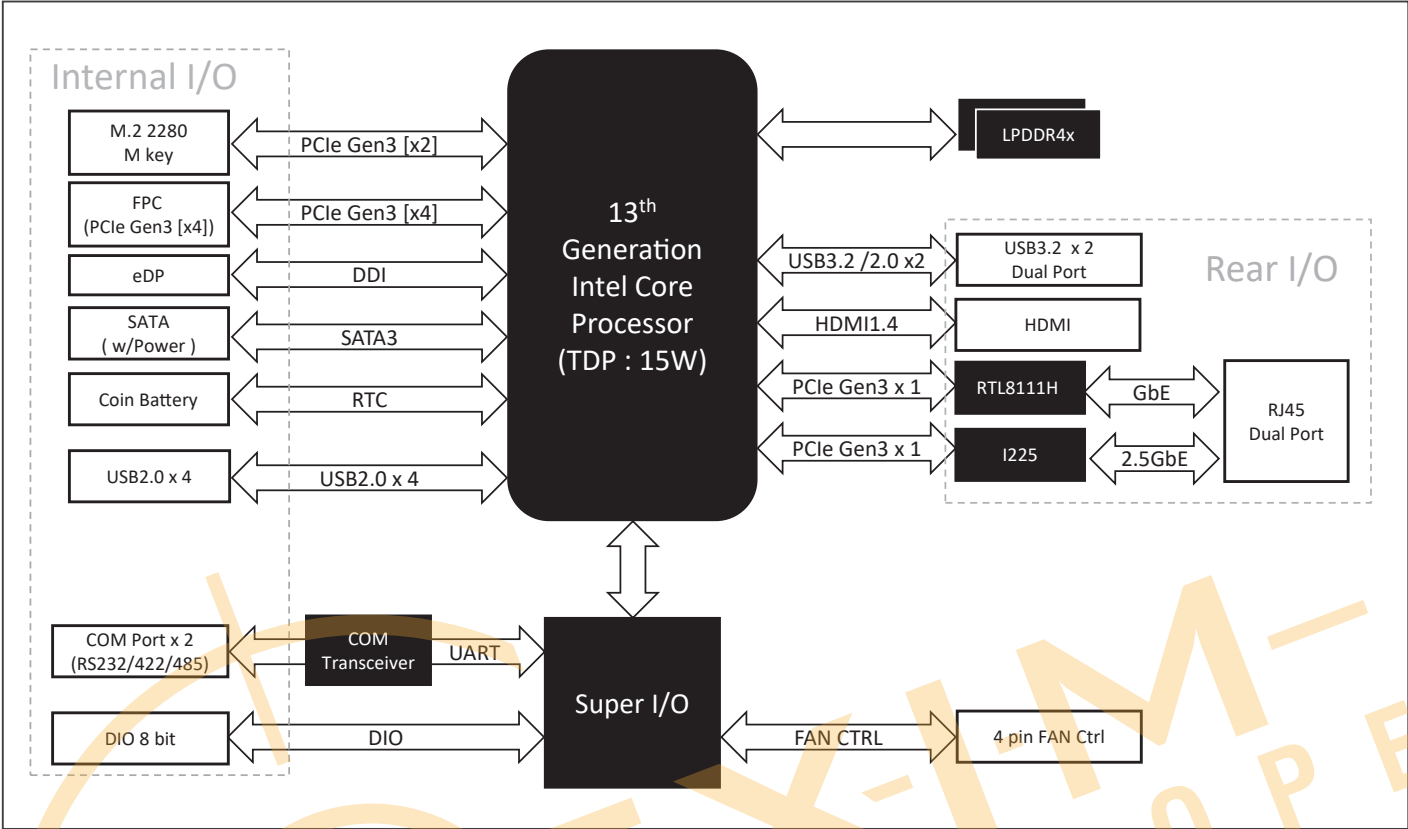

Dimension

Unit: mm

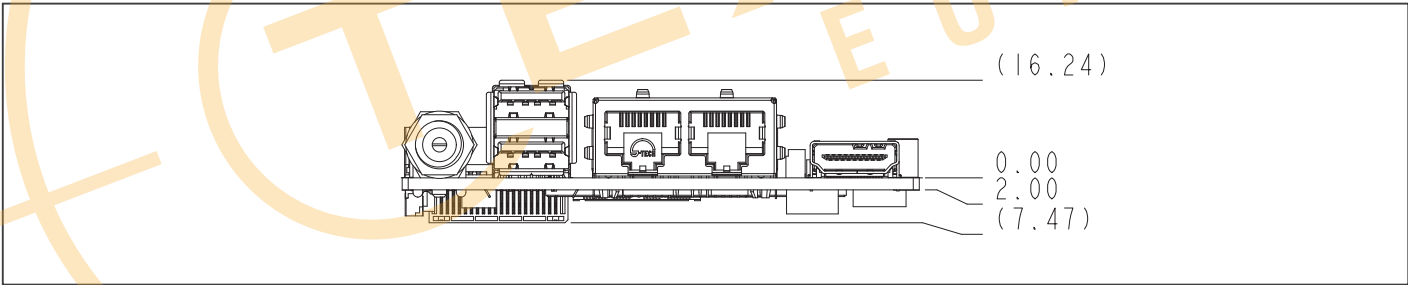

Ordering Information

Part Number	CPU	Memory	Display	Storage	LAN	USB	COM Port	Expansion	TPM	Power	Operating Temperature	Others
DENEXT-RAP8-A10-0001	Intel® Core™ i7-1365UE	Onboard LPDDR5x 16GB	eDP x 1 , HDMI x 1	SATA 6.0 Gbps x 1	2.5GbE x 1, GbE x 1	USB 3.2 Gen 2 x 2 , USB 2.0 x 4	RS232/422/485 x 2	M.2 2280 M-key x 1 , FPC Connector x 1	fTPM	+12V in (DC Jack)	0°C ~ 60°C	GPIO 8 bits
DENEXT-RAP8-A10-0002	Intel® Core™ i5-1335UE	Onboard LPDDR5x 16GB	eDP x 1 , HDMI x 1	SATA 6.0 Gbps x 1	2.5GbE x 1, GbE x 1	USB 3.2 Gen 2 x 2 , USB 2.0 x 4	RS232/422/485 x 2	M.2 2280 M-key x 1 , FPC Connector x 1	fTPM	+12V in (DC Jack)	0°C ~ 60°C	GPIO 8 bits
DENEXT-RAP8-A10-0003	Intel® Core™ i3-1315UE	Onboard LPDDR5x 16GB	eDP x 1 , HDMI x 1	SATA 6.0 Gbps x 1	2.5GbE x 1, GbE x 1	USB 3.2 Gen 2 x 2 , USB 2.0 x 4	RS232/422/485 x 2	M.2 2280 M-key x 1 , FPC Connector x 1	fTPM	+12V in (DC Jack)	0°C ~ 60°C	GPIO 8 bits

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.

It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.





Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik

T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
E: austria@texim-europe.com



Nordic

Stockholmsgade 45
2100 Copenhagen

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com