


GENE-APL6

3.5" SubCompact Board with Intel® Pentium® N4200/ Celeron® N3350 Processor SoC

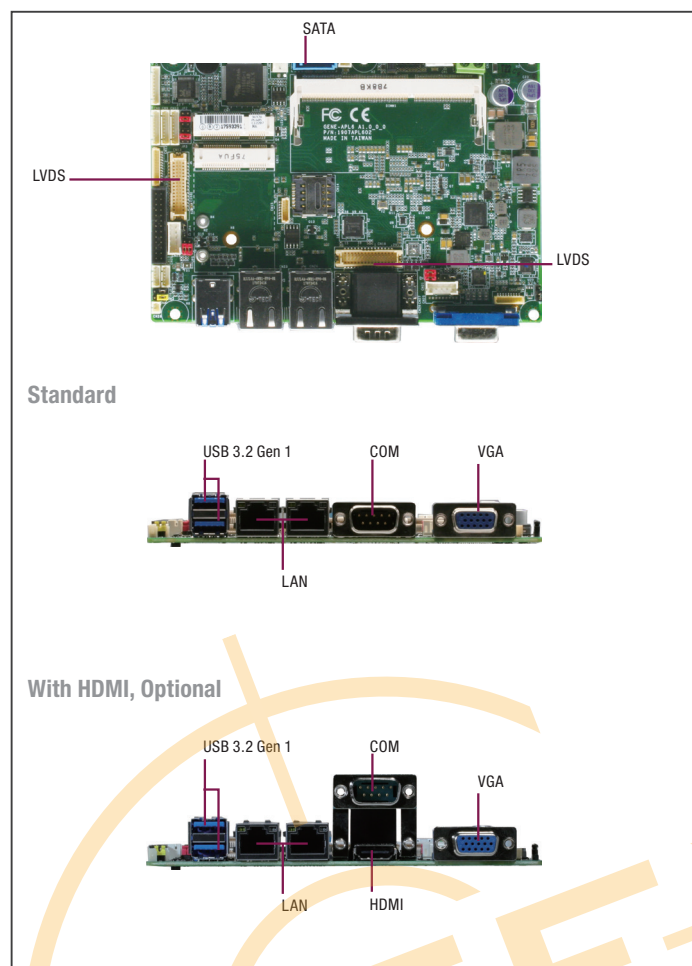

Specifications

System	
Form Factor	3.5" SubCompact Board
CPU	Intel® Atom®/Celeron®/Pentium® Processor: Pentium N4200 (4C/4T, 1.10GHz, up to 2.50GHz, 6W) Celeron N3350 (2C/2T, 1.10GHz, up to 2.40GHz, 6W) Atom E3950 (4C/4T, 1.60GHz, up to 2.00GHz, 9.5W) Atom E3940 (4C/4T, 1.60GHz, up to 1.80GHz, 9.5W) Atom E3930 (2C/2T, 1.30GHz, up to 1.80GHz, 6.5W)
Chipset	Integrated with Intel® SoC
Memory Type	DDR3L 1866, Single Channel SODIMM x 1, Non-ECC (Max.8GB, up to 1600MHz)
BIOS	UEFI
Wake on LAN	Yes
Watchdog Timer	255 Levels
Security	TPM 2.0 (Optional)
RTC Battery	Lithium Battery 3V/240mAh
Dimensions	5.75" x 4" (146mm x 101.7mm)
OS Support	Windows 10 (64bit) Linux Ubuntu 21.04.0/Kernel 5.10
Power	
Power Requirement	+9~36V (Optional: +12V)
Power Supply Type	AT/ATX
Connector	Phoenix 2-pin Connector
Power Consumption	Intel® E3950, DDR3L 1866MHz 8G, 2.36A @+12V(TYPICAL) Intel® E3950, DDR3L 1866MHz 8G, 2.41A @+12V(MAX)
Display	
Controller	Intel® HD Graphics 500/505
LVDS/eDP	LVDS1 Dual Channel 18/24bit x 1, up to 1920 x 1080 LVDS2 Dual Channel 18/24bit x 1 (Optional: HDMI1.4b, up to 3840 x 2160)
Display Interface	VGA x 1, up to 1920 x 1200

Features

- DDR3L 1866, Single Channel SODIMM x 1, Non-ECC (Max.8GB, up to 1600MHz)
- VGA/LVDS/LVDS2 (HDMI Co-layout with LVDS2 Optional)
- 2 CH Audio, SATA 6.0 Gb/s x 1, eMMC up to 64G (Optional)
- Supports 8-bit Digital I/O, USB 2.0 x 2, USB 3.2 Gen 1 x 2, COM x 4
- Mini Card x 1 (Full-size), mSATA x 1 (Half-size)
- 9~36V wide DC input or +12V only (Optional), AT/ATX Mode
- Supports TPM (Optional)




Multiple Display	Up to 3 Simultaneous Displays
Audio	
Codec	Realtek ALC897/892
Audio Interface	Line-In / Line-Out / Mic (Audio function not available for WiTAS SKU)
Speaker	—
External I/O	
Ethernet	Intel® i210/i211, 10/100/1000Base, RJ-45 x 2
USB	USB3.2 Gen 1 x 2
Serial Port	COM1 (RS232)
Video	VGA x 1
Internal I/O	
USB	USB 2.0 x 2
Serial Port	COM2, COM3 (RS232/422/485, support 5V/12V/RI) COM4 (RS232)
Video	LVDS1 x 1 LVDS2/HDMI x 1(Default: LVDS2)
SATA	SATA III x 1 +5V SATA Power Connector x 1
Audio	Audio Header x 1 (Audio function not available for WiTAS SKU)
DIO/GPIO	8-bit
SMBus/I2C	I2C/SMBus x 1 (Default: I2C)
Touch	4/5/8-wire Touch Controller x 1 (optional)
Fan	DC Fan x 1 (optional: Smart Fan)
Sim	Micro SIM x 1 (Optional)
Front Panel	HDD LED, PWR LED, Power Button, Buzzer, Reset
Others	eMMC 16G/32G/64G (optional) Parallel Port(SPP/EPP/ECP) x 1 (optional, select by BIOS)
Expansion	
Mini PCIe/mSATA	Full-size mPCIe x 1 Half-size mSATA x 1
M.2	—
Others	—
Environment & Certification	
Operating Temp.	32°F ~ 140°F (0°C ~ 60°C), WiTAS2 -40°F ~ 185°F (-40°C ~ 85°C)
Storage Temp.	-40°F ~ 185°F (-40°C ~ 85°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
MTBF (Hours)	374,567
EMC	CE/FCC Class A

Optional Accessories

Part Number	Description	QTY per Board
1700050207	USB Cable, 20cm	2
1701090150	COM Cable, 15cm	3
1709100254	Audio Jack Cable, 25cm	1
1709070500	SATA Cable, 50cm	1
1702150155	SATA Power Cable, 15cm	1
170220020B	ATX Power Cable, 20cm	1
170204010R	Power Cable, 10cm	1
GENE-APL6-HSK01	HeatSink.146X80X14mm.GENE-APL6.(used with heat spreader)	1


Note: All specifications are subject to change without notice.

Block Diagram

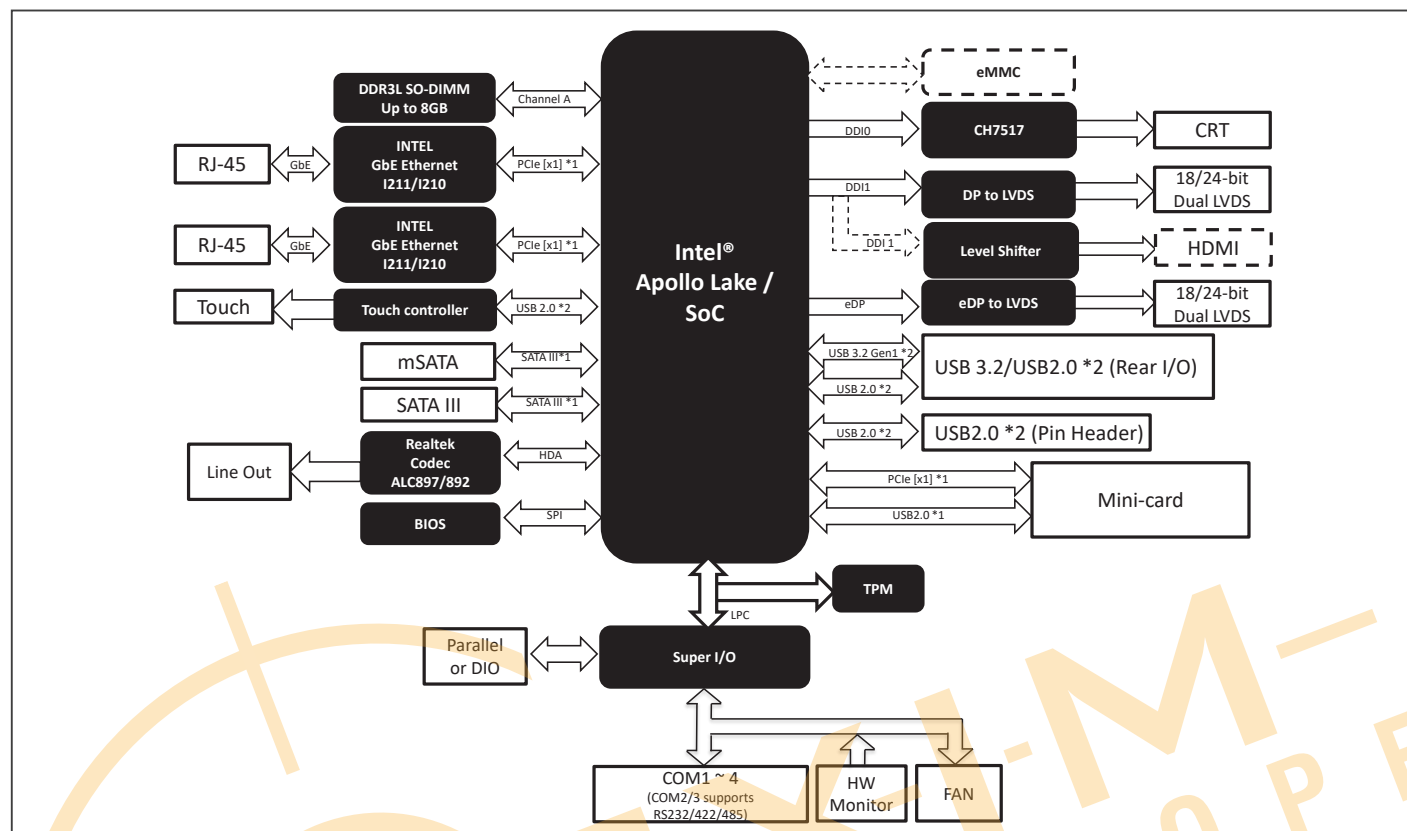

Dimension

Unit: mm

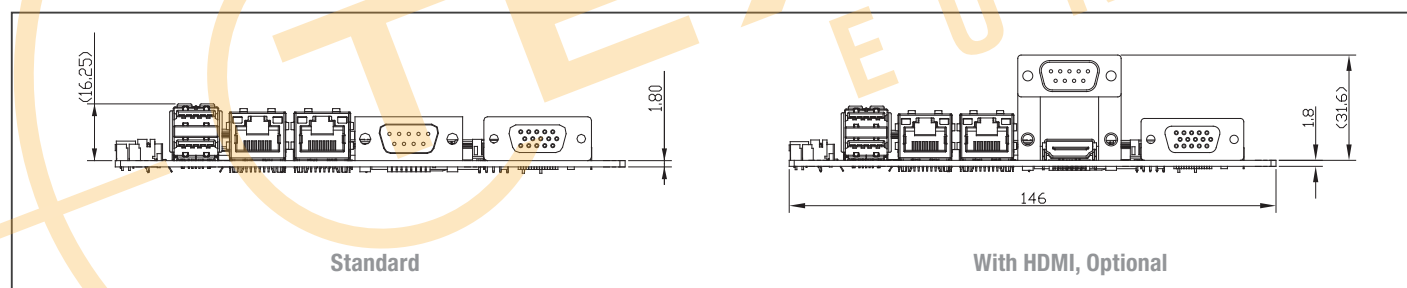

Packing List

Part Number	Description	QTY
GENE-APL6	GENE-APL6 MB	1
TH3APL6010	Heat spreader for CPU N Series	1
M16APL6001	Heat spreader for CPU E Series	1

Ordering Information

Part Number	CPU	Display	LAN	USB	RS-232	RS-232/422/485	Storage	Expansion Slot	TPM	Power	Operating Temp	Others
GENE-APL6-A11-F001	N3350	VGA, LVDS, LVDS2	GbE x 2	USB 3.2 Gen1 x 2 USB 2.0 x 2	2	2	SATA x 1 mSATA x 1	MiniCard x 1 (Full)	—	9~36V	0°C ~ 60°C	DIO x 8
GENE-APL6-A11-F002	N3350	VGA, LVDS, LVDS2	GbE x 2	USB 3.2 Gen1 x 2 USB 2.0 x 2	2	2	SATA x 1 32GB eMMC	MiniCard x 1 (Full)	2.0	9~36V	0°C ~ 60°C	Touch Controller, SIM, DIO x 8
GENE-APL6-A11-F003	N4200	VGA, LVDS, LVDS2	GbE x 2	USB 3.2 Gen1 x 2 USB 2.0 x 2	2	2	SATA x 1 mSATA x 1	MiniCard x 1 (Full)	—	9~36V	0°C ~ 60°C	DIO x 8
GENE-APL6-A11-F004	N4200	VGA, LVDS, LVDS2	GbE x 2	USB 3.2 Gen1 x 2 USB 2.0 x 2	2	2	SATA x 1 32GB eMMC	MiniCard x 1 (Full)	2.0	9~36V	0°C ~ 60°C	Touch Controller, SIM, DIO x 8
GENE-APL6W2-A11-F005	E3950	VGA, LVDS, HDMI	GbE x 2	USB 3.2 Gen1 x 2 USB 2.0 x 2	2	2	SATA x 1 mSATA x 1	MiniCard x 1 (Full)	2.0	12V	WITAS2 (-40~85°C)	SIM, DIO x 8

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.

It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.





Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik

T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
E: austria@texim-europe.com



Nordic

Stockholmsgade 45
2100 Copenhagen

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com