


GENE-APL7

3.5" SubCompact Board with Intel® Pentium® N4200/ Celeron® N3350 Processor SoC

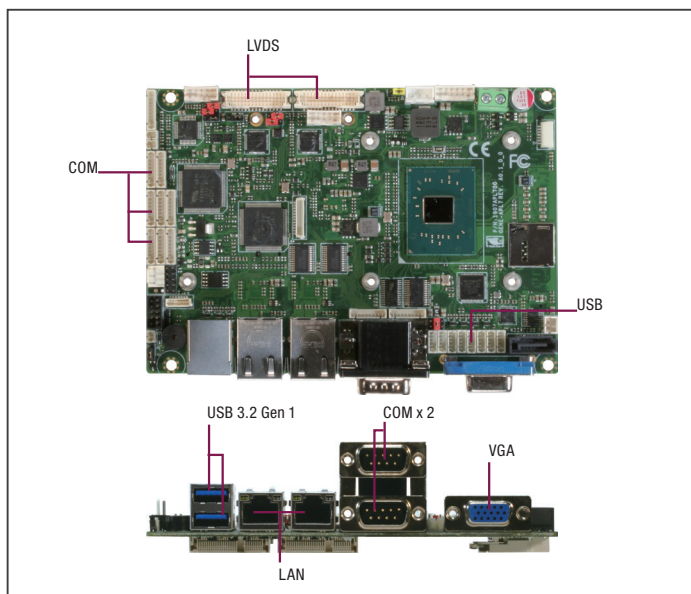

Specifications

SYSTEM	
FORM FACTOR	3.5" SubCompact Board
CPU	Intel® Atom®/Celeron®/Pentium® Processor: Pentium N4200 (4C/4T, 1.10GHz, up to 2.50GHz, 6W) Celeron N3350 (2C/2T, 1.10GHz, up to 2.40GHz, 6W) Atom E3950 (4C/4T, 1.60GHz, up to 2.00GHz, 9.5W) Atom E3940 (4C/4T, 1.60GHz, up to 1.80GHz, 9.5W) Atom E3930 (2C/2T, 1.30GHz, up to 1.80GHz, 6.5W)
CHIPSET	Integrated with Intel® SoC
MEMORY TYPE	DDR3L 1866, Single Channel SODIMM x 1, Non-ECC (Max. 8GB, up to 1600MHz)
BIOS	UEFI
WAKE ON LAN	Yes
WATCHDOG TIMER	255 Levels
SECURITY	—
RTC BATTERY	Lithium Battery 3V/240mAh
DIMENSION	5.75" x 4" (146mm x 101.7mm)
OS SUPPORT	Windows 10 (64bit) Linux Ubuntu 21.04.0/Kernel 5.10
POWER	
POWER REQUIREMENT	12V Only
POWER SUPPLY TYPE	AT/ATX
CONNECTOR	Phoenix 2-pin Connector
POWER CONSUMPTION	Intel® E3950, DDR3L 1866MHz 8GB, 4.15A @ +12V(TYPICAL) Intel® E3950, DDR3L 1866MHz 8GB, 4.29A @ +12V(MAX)
DISPLAY	
CONTROLLER	Intel® HD Graphics 500/505
LVDS/eDP	LVDS1 Dual Channel 18/24bit x 1 (Optional: eDP1.3, up to 3840 x 2160) LVDS2 Dual Channel 18/24bit x 1, up to 1920 x 1080
DISPLAY INTERFACE	VGA x 1, up to 1920 x 1200
MULTIPLE DISPLAY	Up to 3 Simultaneous Displays
AUDIO	
CODEC	Realtek ALC897/892
AUDIO INTERFACE	Line-in/Line-out/MIC
SPEAKER	2W Amplifier(Optional)
EXTERNAL I/O	
ETHERNET	Realtek RTL8119-CG, 10/100/1000Base, RJ-45 x 2
USB	USB 3.2 Gen1 x 2
SERIAL PORT	COM1 (RS232) COM2 (RS232/422/485, support 5V/12V/R1)
VIDEO	VGA x 1
INTERNAL I/O	

Features

- Intel® Pentium® N4200/ Celeron® N3350 Processor SoC
- DDR3L 1866, Single Channel SODIMM x 1, Non-ECC (Max. 8GB, up to 1600MHz)
- VGA/LVDS1/LVDS2 (LVDS1 Co-design with eDP)
- SATA 6.0 Gb/s x 1, GPIO x 8
- USB 3.2 Gen 1 x 2, USB 2.0 x 8, COM x 12
- mSATA x 1 (Full size), Mini Card x 1 (Full size) with uSIM
- DC 12V Only, AT/ATX Mode



USB	USB2.0 x 8
SERIAL PORT	COM3~COM6 (RS232, COM3~COM5 support 5V/12V/R1) Optional: COM3~COM12
VIDEO	LVDS1/eDP (Default: LVDS1) LVDS2
SATA	SATA III x 1 +5V SATA Power Connector x 1
AUDIO	Audio Header x 1 Speaker Header x 2 (optional)
DIO/GPIO	8-bit
SMBus/I2C	I2C/SMBus x1 (Default: SMBus)
TOUCH	—
FAN	DC Fan x 1 (optional: Smart Fan)
SIM	Micro SIM x 1 (Optional)
FRONT PANEL	HDD LED, PWR LED, Power Button, Buzzer, Reset
OTHERS	—
EXPANSION	
Mini PCI-E/mSATA	Full-size mPCIe x 1 Full-Size mSATA/mPCIe x 1 (Default mSATA, BOM Option: mPCIe)
M.2	—
OTHERS	—
ENVIRONMENT & CERTIFICATION	
OPERATING TEMP.	32°F ~ 140°F (0°C ~ 60°C)
STORAGE TEMP.	-40°F ~ 185°F (-40°C ~ 85°C)
OPERATING HUMIDITY	0% ~ 90% relative humidity, non-condensing
MTBF (HOURS)	409,108
EMC	CE/FCC Class A


Optional Accessories

Part Number	Description	QTY
1700050207	USB Cable, 20cm	8
1701090150	COM Cable, 15cm	10
1709100254	Audio Jack Cable, 25cm	1
1702150155	SATA Power Cable, 15cm	1
170204010R	Power Cable, 10cm	1
1709150151	CRT Cable, 15cm (VGA D-SUB connector co-layout with internal pin header by option)	1
GENE-APL7-HSK01	Heatsink	1

Packing List


Part Number	Description	QTY
GENE-APL7	GENE-APL7 MB	1

Block Diagram

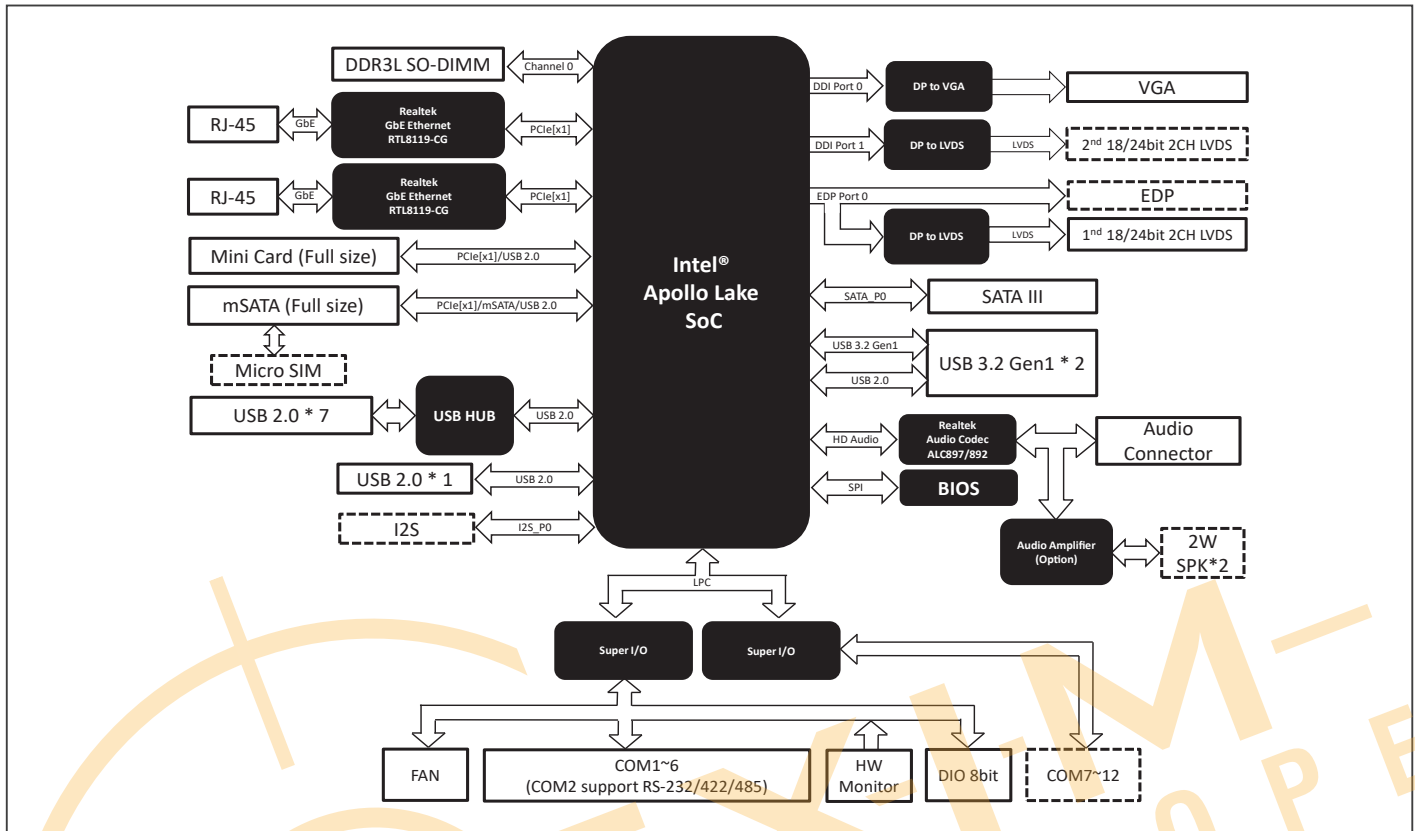

Dimension

Unit: mm

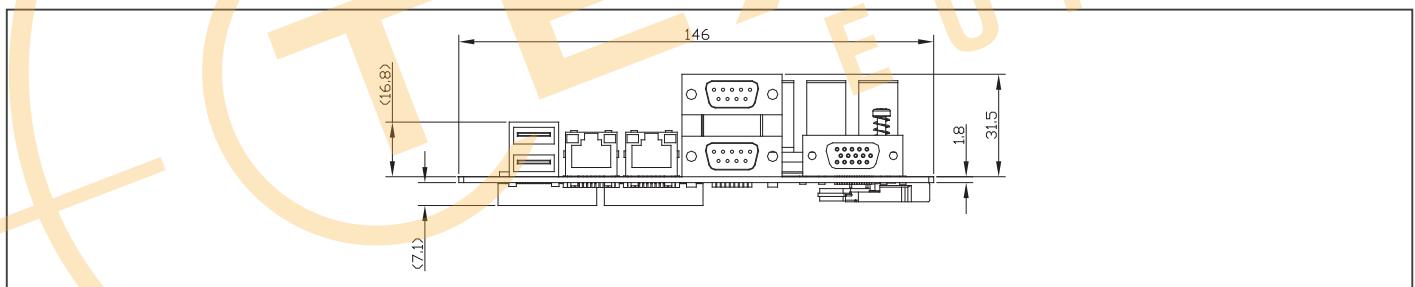

Ordering Information

Part Number	CPU	Display	LAN	USB	RS-232	RS-232/422/485	Storage	Expansion Slot	Power	Operating Temp	Others
GENE-APL7-A11-F001	N3350	VGA/LVDS	GbE x 2	USB 3.2 Gen 1 x 2 USB 2.0 x 8	5	1	SATA x 1 mSATA x 1 (full size)	MiniCard x 1 (Full)	12V	0°C ~ 60°C	Audio, DIO x 8
GENE-APL7-A11-F002	N3350	VGA/LVDS/LVDS2	GbE x 2	USB 3.2 Gen 1 x 2 USB 2.0 x 8	11	1	SATA x 1 mSATA x 1 (full size)	MiniCard x 1 (Full)	12V	0°C ~ 60°C	Micro SIM, DIO x 8, Audio, 2W AMP
GENE-APL7-A11-F003	N4200	VGA/LVDS/eDP	GbE x 2	USB 3.2 Gen 1 x 2 USB 2.0 x 8	11	1	SATA x 1 mSATA x 1 (full size)	MiniCard x 1 (Full)	12V	0°C ~ 60°C	Micro SIM, DIO x 8, Audio, 2W AMP

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.

It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.





Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik

T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
E: austria@texim-europe.com



Nordic

Stockholmsgade 45
2100 Copenhagen

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com