


GENE-RAP6

3.5" SubCompact Board with 13th Generation Intel® Core™ i7/i5/i3 Processor SoC

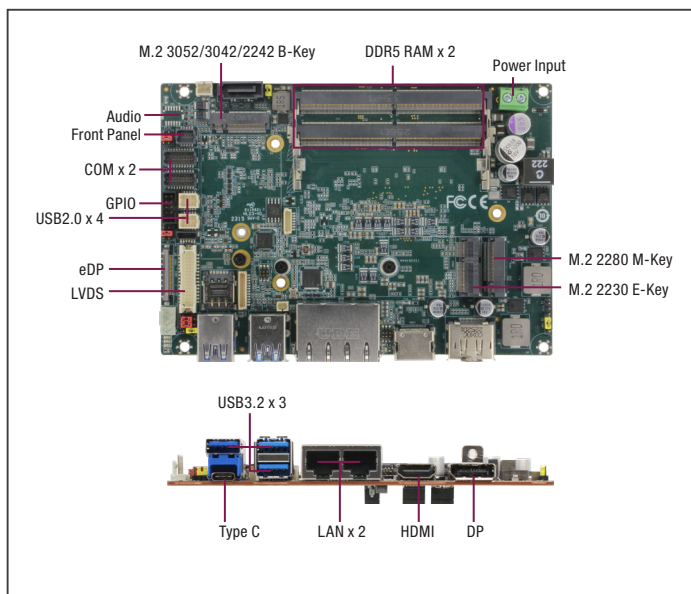

Specifications

System	
Form Factor	3.5" SubCompact Board
CPU	13th Generation Intel® Core™ i7/i5/i3 Processors: Intel® Core™ i7-1360P (4P+8E/16T, 2.20 GHz, 28W) Intel® Core™ i7-1370PE (6PC+8EC/20T, 1.90 GHz, 28W) Intel® Core™ i7-1370PRE (6PC+8EC/20T, 1.90 GHz, 28W) Intel® Core™ i5-1340PE (4PC+8EC/16T, 1.80 GHz, 28W) Intel® Core™ i5-1335UE (2PC+8EC/12T, 1.30 GHz, 15W) Intel® Core™ i3-1320PE (4PC+4EC/12T, 1.70 GHz, 28W) Intel® Processor U300E (1PC+4EC/6T, 1.10 GHz, 15W)
Chipset	Integrated with Intel® SoC
Memory Type	DDR5 4800, Dual Channel SODIMM x 2, Max. 64GB, Non-ECC
BIOS	UEFI
Wake on LAN	Yes
Watchdog Timer	255 Levels
Security	TPM 2.0 (Optional)
RTC Battery	Lithium Battery 3V/240mAH
Dimensions	5.75" x 4" (146mm x 101.7mm), 0.94 lbs (0.43 kg)
OS Support	Windows 10/11 (64bit) Ubuntu 22.04.2/5.19.0-32-generic
Power	
Power Requirement	+9V~36V (Optional: +12V)
Power Supply Type	AT/ATX
Connector	Phoenix 2-pin Connector
Power Consumption	Intel® Core™ i7-1370PE, DDR5 32GB x 2, 5.33A@ +12V (TYPICAL) Intel® Core™ i7-1370PE, DDR5 32GB x 2, 8.55A@ +12V (MAX)
Display	
Controller	Intel® Iris® Xe Graphics Intel® UHD Graphics
LVDS/eDP	LVDS x 1, Dual Channel 18/24bit, up to 1920 x 1080 eDP 1.4 x 1, up to 3840 x 2160 (Optional)
Display Interface	HDMI 2.1 x 1, up to 8K x 4K@60Hz or 4K x 2K@120Hz DP 1.4 x 1, up to 7680 x 4320@60Hz 30bpp (support DP++)
Multiple Display	Up to 4 Simultaneous Displays
Audio	
Codec	Realtek ALC897
Audio Interface	Line-In/Line-Out/Mic (Audio function not available for WiTAS SKU)
Speaker	—
External I/O	
Ethernet	Intel® I219 1GbE, RJ-45 x 1 Intel® I226 2.5GbE, RJ-45 x 1
USB	USB 3.2 Gen 2 x 3 USB Type-C x 1 (USB 3.2 Gen 2, DP 1.4, PD 5V/3A)
Serial Port	—
Video	HDMI 2.1 x 1, DP 1.4 x 1

Features

- 13th Generation Intel® Core™ i7/i5/i3/U-series Processor SoC
- DDR5 4800, Dual Channel SODIMM x 2, up to 64GB
- LVDS x 1, eDP x1, DP x 1, HDMI x 1
- 2.5GbE x 1, GbE x 1, SATA 6Gb/s x 1, GPIO x 8-bit
- USB 3.2 Gen 2 x 3, USB 2.0 x 4, USB Type C x 1, RS-232/422/485 x 4
- M.2 2280 M-Key x 1, M.2 2230 E-Key x 1, M.2 3052/3042/2242 B-Key x 1
- Wide DC Input 9-36V



Internal I/O	
USB	USB 2.0 x 4
Serial Port	COM 1, COM 2 (RS-232/422/485, supports 5V/12V/RI) COM 3, COM 4 (RS-232/422/485)
Video	LVDS x 1 eDP x 1 Inverter x 1 (12V/2A)
SATA	SATA 6.0 Gb/s x 1 +5V SATA Power Connector x 1
Audio	Audio Header x 1 (Optional, Audio function not available for WiTAS SKU)
DIO/GPIO	GPIO 8-bit
SMBus/I2C	SMBus/I2C x 1 (Default: SMBus)
Touch	—
Fan	4pins Smart Fan x 1
Sim	Nano SIM x 1
Front Panel	HDD LED, PWR LED, Power Button, Buzzer, Reset
Others	—
Expansion	
Mini PCIe/mSATA	—
M.2	M.2 2280 M-Key x 1 (PCIe 4.0 [x4] x 1) M.2 3052/3042/2242 B-Key x 1 (PCIe 3.0 [x2]/SATA + USB3.2), Default: SATA (selected by BOM) M.2 2230 E-Key x 1 (PCIe 3.0 [x1] + USB2.0)
Others	FPC x 1 (PCIe 4.0 [x4] x1), Only support Graphic or NVME
Environment & Certification	
Operating Temp.	32°F ~ 140°F (0°C ~ 60°C) WiTAS2: -40°F ~ 185°F (-40°C ~ 85°C)
Storage Temp.	-40°F ~ 185°F (-40°C ~ 85°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
MTBF (Hours)	338,172
EMC	CE/FCC Class A

Packing List


Part Number	Description	QTY
GENE-RAP6	GENE-RAP6 MB	1

Optional Accessories

Part Number	Description	QTY
GENE-ADP6-FAN01	CPU Cooler.12V.4800RPM.Smart FAN	1
GENE-ADP6-HSP01	Heatspreader.146*80*11mm	1
GENE-ADP6-HSK01	Heatsink. 146*101.6*25mm	1
1702150155	SATA HDD Power, Cable 15cm	1
170X000398	Power Cable, DC JACK, 30cm	1
170204010R	Power Cable, Double 4P, 10cm	1
170X000156	Audio Cable, 25cm	1
1709100108	Front Panel Cable, 10cm	1
170X000231	COM Port Cable, 30cm	2
170010010D	USB 2.0 Cable, 10cm	2




Block Diagram

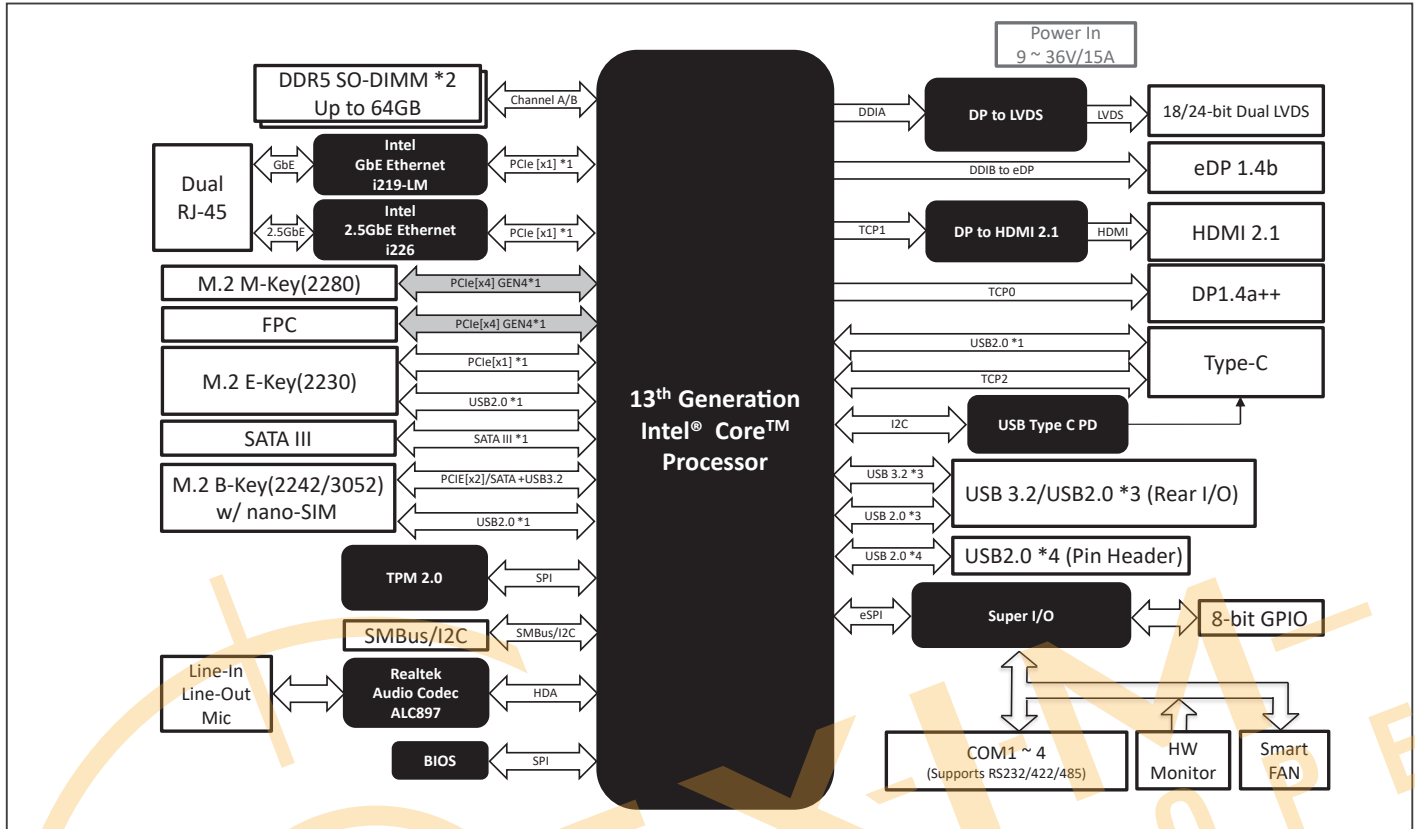

Dimension

Unit: mm

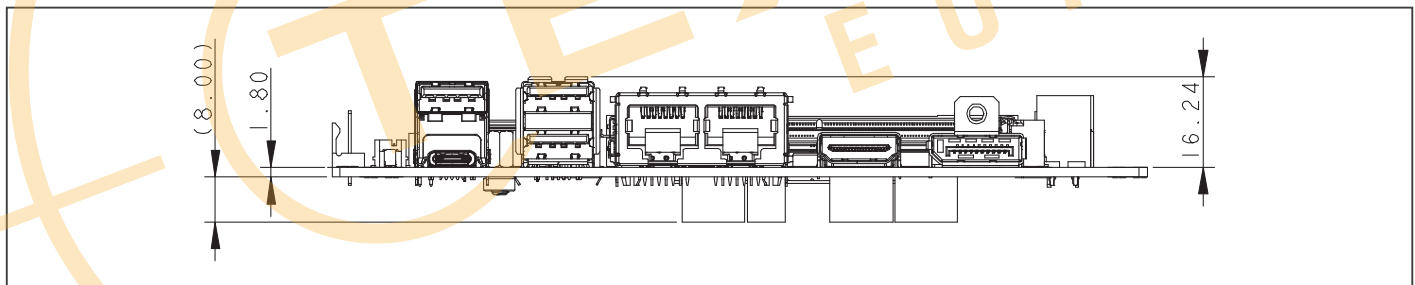

Ordering Information

Part Number	CPU	Display	LAN	USB	COM	Storage	Expansion Slot	TPM	Power	Temp	Others
GENE-RAP6-A10-0001	Intel® Core™ i7-1370PE	HDMI x1, DP++ x1, LVDS x1, eDP x1, Type-c DP x1	GbE x1 2.5GbE x1	USB 3.2 Gen 2 x3 USB Type-C x1 USB 2.0 x4	4	SATA x1	M.2 2280 M-Key x1 M.2 3052 B-Key x1 M.2 2230 E-Key x1	2.0	9~36V	0°C ~ 60°C	Audio, Nano SIM, GPIO x8, SMBUS
GENE-RAP6-A10-0002	Intel® Core™ i5-1340PE	HDMI x1, DP++ x1, LVDS x1, eDP x1, Type-c DP x1	GbE x1 2.5GbE x1	USB 3.2 Gen 2 x3 USB Type-C x1 USB 2.0 x4	4	SATA x1	M.2 2280 M-Key x1 M.2 3052 B-Key x1 M.2 2230 E-Key x1	2.0	9~36V	0°C ~ 60°C	Audio, Nano SIM, GPIO x8, SMBUS
GENE-RAP6-A10-0003	Intel® Core™ i5-1335UE	HDMI x1, DP++ x1, LVDS x1, Type-c DP x1	GbE x1 2.5GbE x1	USB 3.2 Gen 2 x3 USB Type-C x1 USB 2.0 x4	4	SATA x1	M.2 2280 M-Key x1 M.2 3052 B-Key x1 M.2 2230 E-Key x1	—	12V	0°C ~ 60°C	Audio, Nano SIM, GPIO x8, SMBUS
GENE-RAP6-A10-0004	Intel® Core™ i3-1320PE	HDMI x1, DP++ x1, LVDS x1, eDP x1, Type-c DP x1	GbE x1 2.5GbE x1	USB 3.2 Gen 2 x3 USB Type-C x1 USB 2.0 x4	4	SATA x1	M.2 2280 M-Key x1 M.2 3052 B-Key x1 M.2 2230 E-Key x1	2.0	9~36V	0°C ~ 60°C	Audio, Nano SIM, GPIO x8, SMBUS
GENE-RAP6-A10-0005	Intel® Processor U300E	HDMI x1, DP++ x1, LVDS x1, Type-c DP x1	GbE x1 2.5GbE x1	USB 3.2 Gen 2 x3 USB Type-C x1 USB 2.0 x4	4	SATA x1	M.2 2280 M-Key x1 M.2 3052 B-Key x1 M.2 2230 E-Key x1	—	12V	0°C ~ 60°C	Audio, Nano SIM, GPIO x8, SMBUS
GENE-RAP6W2-A10-0006	Intel® Core™ i7-1370PRE	HDMI x1, DP++ x1, LVDS x1, Type-c DP x1	GbE x1 2.5GbE x1	USB 3.2 Gen 2 x3 USB Type-C x1 USB 2.0 x4	4	SATA x1	M.2 2280 M-Key x1 M.2 3052 B-Key x1 M.2 2230 E-Key x1	2.0	12V	-40°C ~ 85°C	Nano SIM, GPIO x8, SMBUS
GENE-RAP6-A10-0007	Intel® Core™ i7-1360P	HDMI x1, DP++ x1, LVDS x1, eDP x1, Type-c DP x1	GbE x1 2.5GbE x1	USB 3.2 Gen 2 x3 USB Type-C x1 USB 2.0 x4	4	SATA x1	M.2 2280 M-Key x1 M.2 3052 B-Key x1 M.2 2230 E-Key x1	2.0	9~36V	0°C ~ 60°C	Audio, Nano SIM, GPIO x8, SMBUS

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.

It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.





Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik

T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
E: austria@texim-europe.com



Nordic

Stockholmsgade 45
2100 Copenhagen

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com