


GENE-BT05

3.5" SubCompact Board with Intel® Atom® and Celeron® Processor SoC

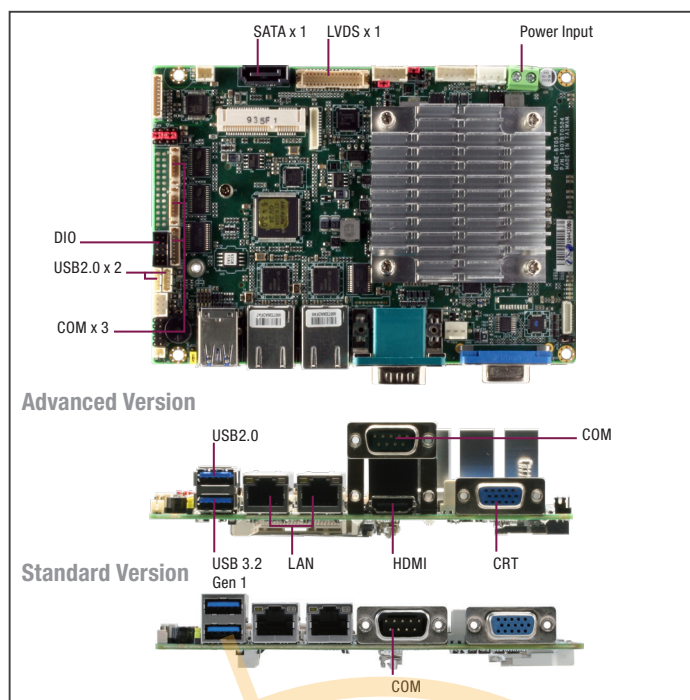

Features

- Onboard Intel® Atom® and Celeron® Processor SoC
- DDR3L 1066/1333 MHz SODIMM x 1, Up to 8 GB
- Gigabit Ethernet x 2, RJ-45 x 2
- CRT, 18/24-bit Dual-Channel LVDS LCD, HDMI
- 2CH HD Audio
- SATA 3.0 Gb/s x 1, CFast™ x 1
- USB 3.2 Gen 1 x 1, USB2.0 x 3, COM x 4, 8-bit Digital I/O
- Mini-Card x 2 (Full-size x 1, Half-size x 1)
- DC 12V, AT/ATX Mode
- Onboard 4/5/8-wire Resistive Touch Screen Controller (Optional)
- AAEON Hi-Safe/SDK/Utility Supported
- mSATA x 1 (Optional, Share Mini-Card Interface)
- Onboard Trusted Platform Module (Optional)



Internal I/O	
USB	USB2.0 x 2
Serial Port	COM2, COM3 (RS232/422/485, supports 5V/12V/RI), COM4 (RS232)
Video	LVDS x 1
SATA	SATA III x 1, +5V SATA Power Connector x 1
Audio	Audio Header x 1 (Audio function not available for WITAS SKU)
DIO/GPIO	8-bit
SMBus/I2C	I2C/SMBus x1 (Default: SMBus)
Touch	4/5/8-wire Touch Controller x 1 (optional)
Fan	DC Fan x 1 (optional: Smart Fan)
Sim	SIM X1
Front Panel	HDD LED, PWR LED, Power Button, Buzzer, Reset
Others	CFast™ (option with mSATA by BOM, occupies one Mini Card location)
Expansion	
Mini PCIe/mSATA	Full-Size mPCIe/ USB2.0 x 1 Half-Size mSATA/ mPCIe x 1 (BOM optional)
M.2	—
Others	—
Environment & Certification	
Operating Temp.	32°F ~ 140°F (0°C ~ 60°C) or WITAS 2 (E3825)
Storage Temp.	-40°F ~ 176°F (-40°C ~ 80°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
MTBF (Hours)	344,859
EMC	CE/FCC Class A

Specifications

System	
Form Factor	3.5" SubCompact Board
CPU	Intel® Atom®/ Celeron® Processor: Celeron® J1900 (4C/4T, 2.00GHz, up to 2.42GHz, 10W) Celeron® N2930 (4C/4T, 1.83GHz, up to 2.16GHz, 7.5W) Celeron® N2807 (2C/2T, 1.58GHz, up to 2.16GHz, 4.3W) Atom® E3845 (4C/4T, 1.91 GHz, 10W) Atom® E3825 (2C/2T, 1.33 GHz, 6W)
Chipset	Integrated with Intel® SoC
Memory Type	DDR3L up to 1333MHz, SODIMM x 1, up to 8GB, Non-ECC
BIOS	UEFI
Wake on LAN	Yes
Watchdog Timer	255 Levels
Security	TPM 1.2(Optional)
RTC Battery	Lithium Battery 3V/240mAh
Dimensions	5.75" x 4" (146mm x 101.7mm)
OS Support	Windows 7/10 (64bit) Linux Ubuntu 20.04.3/Kernel 5.11
Power	
Power Requirement	+12V Only
Power Supply Type	AT/ATX
Connector	Phoenix 2-pin Connector
Power Consumption	Intel® J1900, DDR3L 1600MHz 8GB, 1.73A @ +12V(TYPICAL) Intel® J1900, DDR3L 1600MHz 8GB, 1.88A @ +12V(MAX)
Display	
Controller	Intel® HD Graphics for Intel Atom® Processor Z3700 Series
LVDS/eDP	LVDS Dual Channel 18/24bit x 1, up to 1920 x 1080
Display Interface	HDMI 1.4a x 1, up to 3840 x 2160 VGA x 1, up to 1920 x 1200
Multiple Display	Up to 3 Simultaneous Displays
Audio	
Codec	Realtek ALC897/892
Audio Interface	Line-In / Line-Out / Mic (Audio function not available for WITAS SKU)
Speaker	—
External I/O	
Ethernet	Intel® i210/i211, 10/100/1000Base, RJ-45 x 2
USB	USB 3.2 Gen 1 x 1, USB 2.0 x 1
Serial Port	COM1 (RS232)
Video	VGA x 1, HDMI 1.4a x 1


Optional Accessories

Part Number	Description	QTY per Board
1700050207	USB Cable, 20cm	2
1701090150	COM Cable, 15cm	3
1709100254	Audio Jack Cable, 25cm	1
1709070500	SATA CABLE, 50cm	1
170204010R	Power Cable, 10cm	1
1702150155	SATA Power Cable, 15cm	1
170220020B	ATX Power Cable, 20cm	1

Packing List


Part Number	Description	QTY
GENE-BT05	GENE-BT05 MB	1
M16BT07020	Heatsink	1

Block Diagram

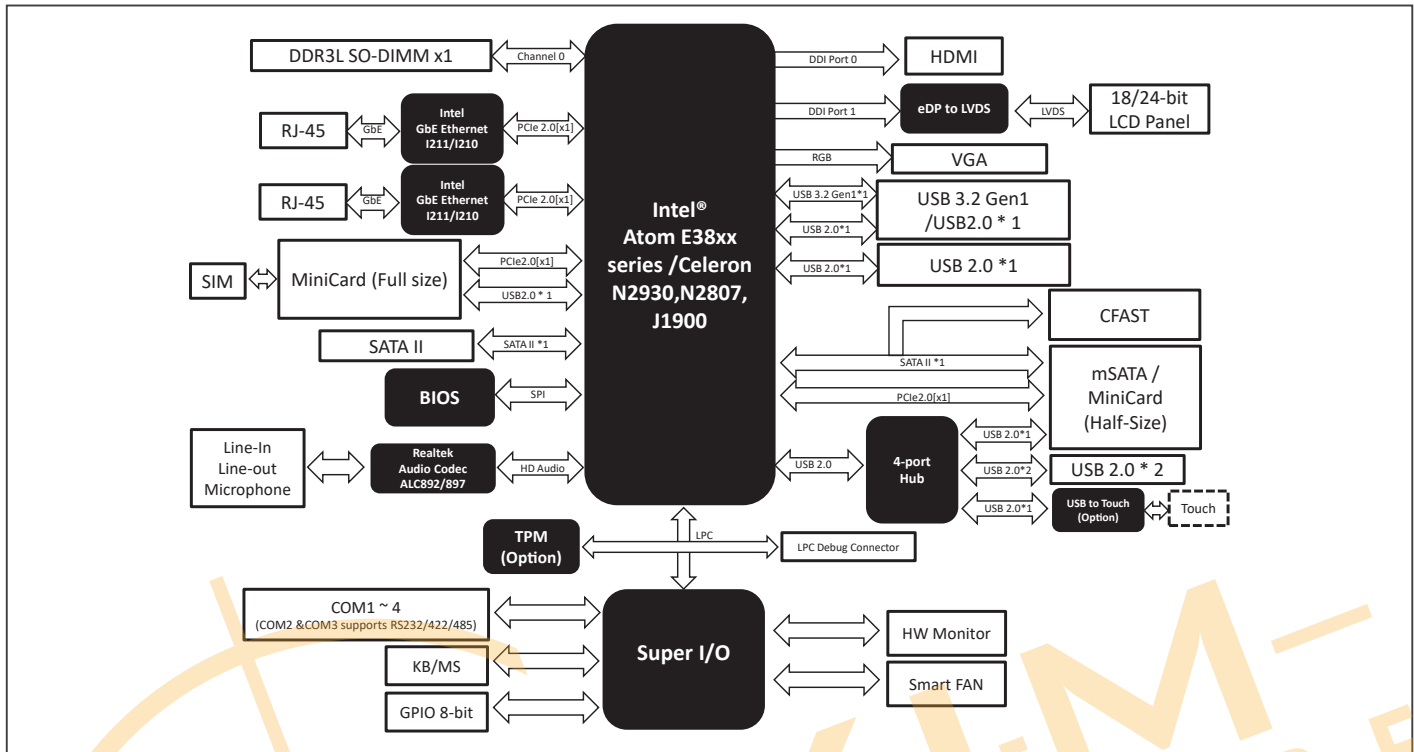

Dimension

Unit: mm

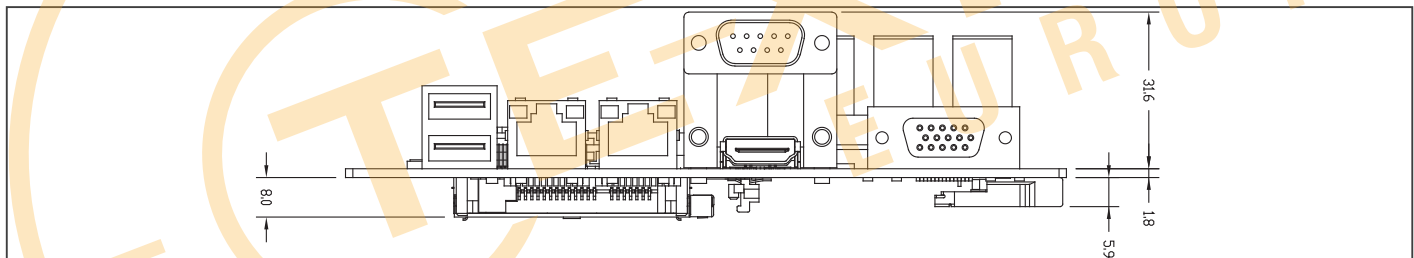

Ordering Information

Part Number	CPU	Display	LAN	USB	RS-232	RS-232/422/485	Storage	Expansion Slot	TPM	Power	Operating Temp	Others
GENE-BT05-A12-0001	Intel®Celeron® N2930	CRT + LVDS LVDS + HDMI HDMI + CRT	Gbe x 2	USB3.0 x 1 USB2.0 x 3	2	2	SATA x 1 CFast x 1	Mini Card x 2 (Full-Size x 1, Half-Size x 1)	1.2	+12V, AT/ATX	0°C ~ 60°C	Audio, Touch, SIM, GPIO x 8
GENE-BT05-A12-0002	Intel®Celeron® N2930	CRT + LVDS	Gbe x 2	USB3.0 x 1 USB2.0 x 3	2	2	SATA x 1 mSATA x 1 (Half Size)	Mini Card x 1 (Full-Size)	—	+12V, AT/ATX	0°C ~ 60°C	Audio, GPIO x 8
GENE-BT05-A12-0003	Intel®Celeron® N2807	CRT + LVDS LVDS + HDMI HDMI + CRT	Gbe x 2	USB3.0 x 1 USB2.0 x 3	2	2	SATA x 1 CFast x 1	Mini Card x 2 (Full-Size x 1, Half-Size x 1)	1.2	+12V, AT/ATX	0°C ~ 60°C	Audio, Touch, SIM, GPIO x 8
GENE-BT05-A12-0004	Intel®Celeron® N2807	CRT + LVDS	Gbe x 2	USB3.0 x 1 USB2.0 x 3	2	2	SATA x 1 mSATA x 1 (Half Size)	Mini Card x 1 (Full-Size)	—	+12V, AT/ATX	0°C ~ 60°C	Audio, GPIO x 8
GENE-BT05-A12-0005	Intel® Atom™ E3845	CRT + LVDS LVDS + HDMI HDMI + CRT	Gbe x 2	USB3.0 x 1 USB2.0 x 3	2	2	SATA x 1 CFast x 1	Mini Card x 2 (Full-Size x 1, Half-Size x 1)	1.2	+12V, AT/ATX	0°C ~ 60°C	Audio, Touch, SIM, GPIO x 8
GENE-BT05-A12-0006	Intel® Atom™ E3845	CRT + LVDS	Gbe x 2	USB3.0 x 1 USB2.0 x 3	2	2	SATA x 1 mSATA x 1 (Half Size)	Mini Card x 1 (Full-Size)	—	+12V, AT/ATX	0°C ~ 60°C	Audio, GPIO x 8
GENE-BT05-A12-0007	Intel® Atom™ E3825	CRT + LVDS LVDS + HDMI HDMI + CRT	Gbe x 2	USB3.0 x 1 USB2.0 x 3	2	2	SATA x 1 CFast x 1	Mini Card x 2 (Full-Size x 1, Half-Size x 1)	1.2	+12V, AT/ATX	0°C ~ 60°C	Audio, Touch, SIM, GPIO x 8
GENE-BT05-A12-0008	Intel® Atom™ E3825	CRT + LVDS	Gbe x 2	USB3.0 x 1 USB2.0 x 3	2	2	SATA x 1 mSATA x 1 (Half Size)	Mini Card x 1 (Full-Size)	—	+12V, AT/ATX	0°C ~ 60°C	Audio, GPIO x 8
GENE-BT05-A12-0009	Intel®Celeron® J1900	CRT + LVDS LVDS + HDMI HDMI + CRT	Gbe x 2	USB3.0 x 1 USB2.0 x 3	2	2	SATA x 1 CFast x 1	Mini Card x 2 (Full-Size x 1, Half-Size x 1)	1.2	+12V, AT/ATX	0°C ~ 60°C	Audio, Touch, SIM, GPIO x 8
GENE-BT05-A12-0010	Intel®Celeron® J1900	CRT + LVDS	Gbe x 2	USB3.0 x 1 USB2.0 x 3	2	2	SATA x 1 mSATA x 1 (Half Size)	Mini Card x 1 (Full-Size)	—	+12V, AT/ATX	0°C ~ 60°C	Audio, GPIO x 8
GENE-BT05W2-A12-0006	Intel® Atom™ E3845	CRT + LVDS	Gbe x 2	USB3.0 x 1 USB2.0 x 3	2	2	SATA x 1 mSATA x 1 (Half Size)	Mini Card x 1 (Full-Size)	—	+12V, AT/ATX	WTAS 2(-40°C~85°C)	GPIO x 8
GENE-BT05W2-A12-0008	Intel® Atom™ E3825	CRT + LVDS	Gbe x 2	USB3.0 x 1 USB2.0 x 3	2	2	SATA x 1 mSATA x 1 (Half Size)	Mini Card x 1 (Full-Size)	—	+12V, AT/ATX	WTAS 2(-40°C~85°C)	GPIO x 8

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.

It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.





Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik

T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
E: austria@texim-europe.com



Nordic

Stockholmsgade 45
2100 Copenhagen

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com