




EPIC-TGH7

EPIC Board with 11th Generation Intel® Core™/Xeon® Processors

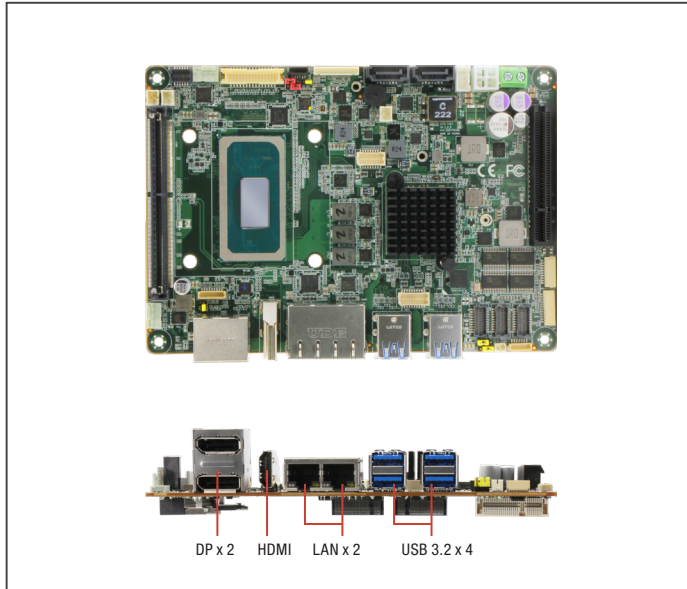

Specifications

System	
Form Factor	4" EPIC Board
CPU	Onboard 11th Generation Intel® Core™/Xeon® Processors: Intel® Xeon® W-11865MRE (8C/16T, 2.60 GHz, 45W) Intel® Core™ i7-11850HE (8C/16T, 2.60 GHz, 45W) Intel® Core™ i5-11500HE (6C/12T, 2.60 GHz, 45W) Intel® Core™ i3-11100HE (4C/8T, 2.40 GHz, 45W) Intel® Celeron® 6600HE (2C/2T, 2.60 GHz, 35W)
Chipset	Intel® 500 Series Mobile Chipset (RM590E/HM570E)
Memory Type	DDR4 3200, Dual Channel SODIMM x 2, Max 64GB (ECC supported by Xeon only with DDR4 2666)
BIOS	UEFI
Wake On Lan	Yes
Watchdog Timer	255 Levels
Security	TPM 2.0 (Optional)
RTC Battery	Lithium Battery 3V/240mAh
Dimension	4.53" x 6.50" (115mm x 165mm)
OS Support	Windows 10 (64bit) Ubuntu 20.04.3/Kernel 5.11.0-27-generic x86_64 or above
Power	
Power Requirement	+9V to +24V (Optional: +12V)
Power Supply Type	AT/ATX
Connector	ATX 4-Pin connector + Phoenix 2-Pin Connector
Power Consumption	Xeon® W-11865MRE, DDR4 32GB x 2, 8.32A@12V, 99.84W (TYPICAL) Xeon® W-11865MRE, DDR4 32GB x 2, 12.52A@12V, 150.24W (MAX)
Display	
Controller	Intel® UHD Graphics for 11th Gen Intel® Processors
LVDS/eDP	LVDS x 1, Dual Channel 24/48bit, up to 1920 x 1080 eDP 1.4 x 1, up to 1920 x 1089
Display Interface	VGA x 1, up to 1920 x 1080 DP++ 1.2 x 2, up to 3840 x 2160 @60Hz HDMI 2.0 x 1, up to 3840 x 2160 @60Hz
Multiple Display	Up to 4 Simultaneous Displays
Audio	
CODEC	Realtek ALC269
Audio Interface	Line-In/Line-Out/Mic
Speaker	2W Amp.
External I/O	
Ethernet	Intel® I225/I226, 2.5GbE RJ-45 x 1 Intel® I219, 1GbE RJ-45 x 1
USB	USB 3.2 Gen 2 x 4
Serial Port	—
Video	VGA x 1 DP 1.2 x 2 HDMI 2.0 x 1

Features

- Onboard 11th Generation Intel® Core™/Xeon® Processors
- DDR4 3200 SODIMM x 2, up to 64GB
- HDMI 2.0b x 1, DP++ 1.2a x 2, LVDS (Dual Channel) or eDP x 1, VGA x 1
- SATA 6Gb/s x 2
- 2.5GbE RJ-45 x 1, GbE RJ-45 x 1
- USB 3.2 Gen 2 x 4, USB 2.0 x 4
- M.2 3052 B-Key x 1, M.2 2280 M-Key x 1, Mini Card x 1
- PCIe Gen 4 [x8] slot x 1, FPC (PCIe [x4]) x 1
- COM Port x 6, GPIO 16-bit x 1
- Supports +9V to +24Vin (Wide Voltage Input)

Internal I/O	
USB	USB 2.0 x 4
Serial Port	COM 1, COM 2 (RS-232/422/485, supports 5V/12V/RI) COM 3, COM 4, COM 5, COM 6 (RS-232 only, supports RI only)
Video	LVDS or eDP x 1 (Default: LVDS) LVDS Inverter 5V/12V @2A VGA x 1
SATA	SATA 6Gb/s x 2 +5V SATA Power Connector x 1 (Total up to 5V@2A) (Up to 5V@1A, shared with 2 x 2.5"SSD as limitation with 170X000592)
Audio	Audio Header x 1
DIO/GPIO	GPIO-16 bits
SMBus/I2C	SMBus/I2C (Default : SMBus)
Touch	4/5/8-wire Touch Controller x 1
Fan	4 Pin Smart Fan
SIM	Nano SIM x 1
Front Panel	Power Button, Reset Button, Power LED, SATA LED, Buzzer
Others	—
Expansion	
Mini PCI-E/mSATA	Half Size mSATA/mPCIe x 1 (Default: mPCIe, selected by BIOS)
M.2	M.2 2280 M-Key x 1 (PCIe 4.0 [x4] x 1) M.2 3052 B-Key x 1 (PCIe 3.0 [x2]) + USB 3.2 + USB 2.0)
Others	PCIe 4.0 [x8] Slot x 1 (Supply maximum 25W to the PCIe peripheral) FPC Connector x 1 (PCIe3.0 [x4] x 1)
Environment & Certification	
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C) (Note: To achieve the best performance, installing SODIMM heatsink for EPIC-TGH7 DIMM1at the bottom side is recommended.)
Storage Temperature	-40°F ~ 185°F (-40°C ~ 85°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
MTBF (Hours)	274,169
EMC	CE/FCC Class A

Packing List


- EPIC-TGH7 x 1
- Screw kit x 1

Optional Accessories

Part Number	Description	QTY
170X000390	USB2.0 x 4, Length 12 cm	1
1709150151	VGA cable, Length 15 cm	1
1702150155	SATA power cable, Length 15cm	1
170X000593	SATA cable 15 cm	1
170X000592	SATA Power Y cable, Length 20 cm	1
170X000231	Dual COM Port, Length 30 cm	1
170204010R	Double 4P power cable, Length 10 cm	1
170X000287	Front Panel Cable, Length 10 cm	1
170X000156	Audio Cable, Length 25 cm	1
170X000594	Power Cable to DC Jack, 28cm	1
EPIC-TGH7-FAN01	4 pin CPU Cooler for EPIC-TGH7	1
M16SKU6010	DDR4 SODIMM Metal.AL Heat Sink.72*28*10mm	1




Block Diagram

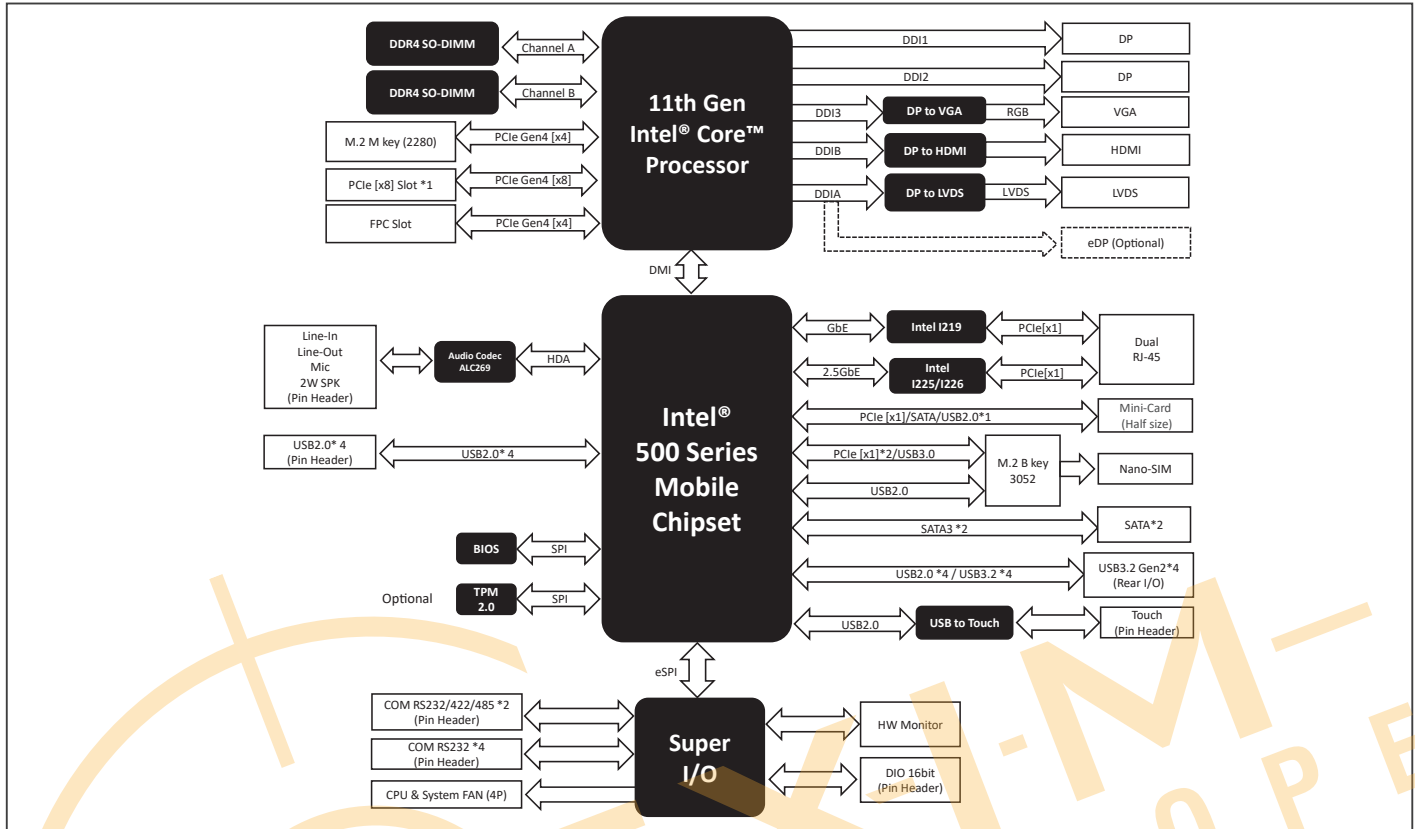

Dimension

Unit: mm

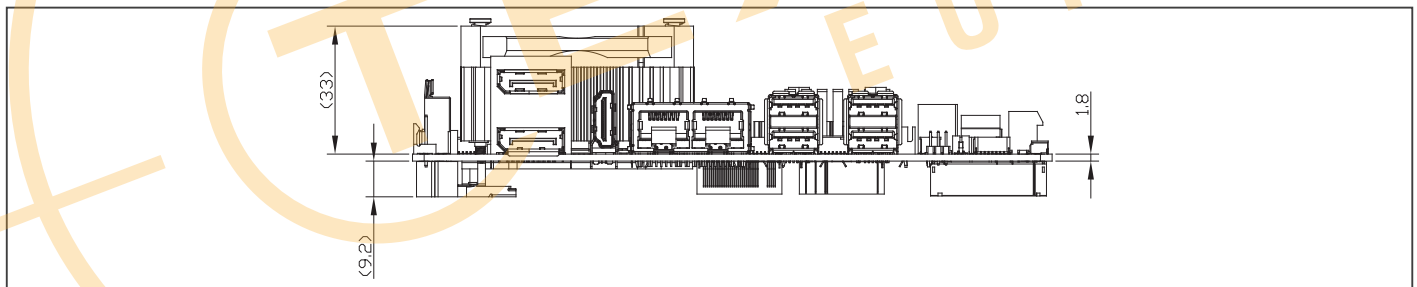

Ordering Information

Part Number	CPU	Memory	Display	Storage	LAN	USB	COM Port	Expansion	TPM	Power	Operating Temperature	Others
EPIC-TGH7-A10-0001	W-11865MRE (with RM590E)	DDR4 SODIMM x 2	LVDS x 1, DP x 2, HDMI x 1, VGA x 1	SATA 6Gb/s x 2	2.5GbE x 1, GbE x 1	USB 3.2 Gen 2 x 4, USB 2.0 x 4	RS232/422/485 x 2, RS232 x 4	M.2 3052 B-key x 1, M.2 2280 M-key x 1, Mini Card (Half Size) x 1, FPC Connector x 1	Optional	+9V to +24Vin (2 Pin Phoenix Connector + 4 Pin ATX Connector)	0°C ~ 60°C	GPIO 16 bits, Nano SIM x 1, Touch x 1
EPIC-TGH7-A10-0002	I7-11850HE (with HM570E)	DDR4 SODIMM x 2	LVDS x 1, DP x 2, HDMI x 1, VGA x 1	SATA 6Gb/s x 2	2.5GbE x 1, GbE x 1	USB 3.2 Gen 2 x 4, USB 2.0 x 4	RS232/422/485 x 2, RS232 x 4	M.2 3052 B-key x 1, M.2 2280 M-key x 1, Mini Card (Half Size) x 1, FPC Connector x 1	Optional	+9V to +24Vin (2 Pin Phoenix Connector + 4 Pin ATX Connector)	0°C ~ 60°C	GPIO 16 bits, Nano SIM x 1, Touch x 1
EPIC-TGH7-A10-0003	i5-11500HE (with HM570E)	DDR4 SODIMM x 2	LVDS x 1, DP x 2, HDMI x 1, VGA x 1	SATA 6Gb/s x 2	2.5GbE x 1, GbE x 1	USB 3.2 Gen 2 x 4, USB 2.0 x 4	RS232/422/485 x 2, RS232 x 4	M.2 3052 B-key x 1, M.2 2280 M-key x 1, Mini Card (Half Size) x 1, FPC Connector x 1	Optional	+9V to +24Vin (2 Pin Phoenix Connector + 4 Pin ATX Connector)	0°C ~ 60°C	GPIO 16 bits, Nano SIM x 1, Touch x 1
EPIC-TGH7-A10-0004	i3-11100HE (with HM570E)	DDR4 SODIMM x 2	LVDS x 1, DP x 2, HDMI x 1, VGA x 1	SATA 6Gb/s x 2	2.5GbE x 1, GbE x 1	USB 3.2 Gen 2 x 4, USB 2.0 x 4	RS232/422/485 x 2, RS232 x 4	M.2 3052 B-key x 1, M.2 2280 M-key x 1, Mini Card (Half Size) x 1, FPC Connector x 1	Optional	+9V to +24Vin (2 Pin Phoenix Connector + 4 Pin ATX Connector)	0°C ~ 60°C	GPIO 16 bits, Nano SIM x 1, Touch x 1

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.

It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.





Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik

T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: austria@texim-europe.com



Nordic

Stockholmsgade 45
2100 Copenhagen

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com