


EPIC-RPS9

EPIC Board with 12th/13th Generation Intel® Core™ Processor

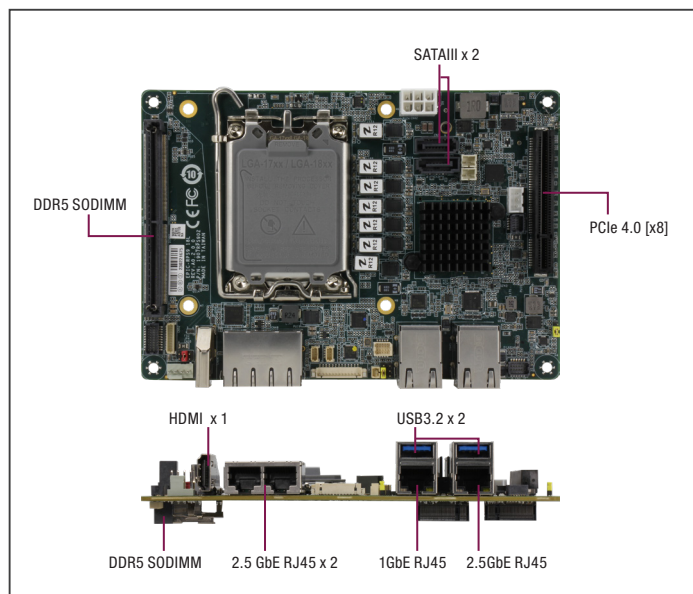

Specifications

System	
Form Factor	4" EPIC Board
CPU	13th Generation Intel® Core™ Processor (up to 35W/65W) 12th Generation Intel® Core™ Processor (up to 35W/65W)
Chipset	Intel 600 Series Chipset (R680E/Q670E/H610E)
Memory Type	DDR5 4800 Dual Channel SODIMM x 2, up to 64GB (ECC support only for R680E)
BIOS	UEFI
Wake On Lan	Yes
Watchdog Timer	255 Levels
Security	TPM 2.0 (Optional)
RTC Battery	Lithium Battery 3V/240mAh
Dimension	4.53" x 6.50" (115mm x 165mm)
OS Support	Windows 10 (64bit) Ubuntu 22.04.2/kernel 5.19.0-32-generic #33
Power	
Power Requirement	+12V (Note: To achieve stable performance, using the power supply unit rated 22A@12V DC output, to meet the potential maximum peak requirement is recommended)
Power Supply Type	AT/ATX
Connector	6-Pin Connector
Power Consumption	Intel® Core™ i9-13900E, DDR5 32GB x2, 7.73A @+12V (Typical) Intel® Core™ i9-13900E, DDR5 32GB x2, 21.39A @+12V (Max)
Display	
Controller	Intel® UHD Graphics 770 (i5 SKU and above) Intel® UHD Graphics 730 (i3 SKU) Intel® UHD Graphics 710 (Intel® Celeron® G6900TE SKU)
LVDS/eDP	eDP 1.4 x 1, up to 3840 x 2160
Display Interface	HDMI 2.0 x 1, up to 3840 x 2160 @60Hz VGA x 1, up to 1920 x 1080
Multiple Display	Up to 3 Simultaneous Displays
Audio	
CODEC	Realtek ALC897
Audio Interface	Line-In/Line-Out/MIC
Speaker	—
External I/O	
Ethernet	Intel® I226, 2.5GbE RJ-45 x 3, Intel® I219, GbE RJ-45 x 1 (R680E & Q670E sku) Intel® I226, 2.5GbE RJ-45 x 1 + Intel® I219, GbE RJ-45 x 1 (H610E sku only)
USB	USB 3.2 Gen 2 x 2
Serial Port	—
Video	HDMI 2.0 x 1 up to 3840 x 2160 @60Hz
Internal I/O	
USB	USB 2.0 x 2

Features

- 12th/13th Generation Intel® Core™ Processor
- DDR5 SODIMM 4800 x 2, up to 64 GB
- Triple Display: HDMI 2.0 x 1, eDP x 1, VGA x 1
- Intel® I226-LM 2.5GbE x 3, Intel® I219-LM GbE x 1
- USB 3.2 Gen 2 x 2 (Rear I/O), USB 2.0 x 2 (Pin Header)
- M.2 2280 M-key x 1, M.2 3052 B-key x 1, M.2 2230 E-key x 1, FPC (PCIe 3.0[x2] x 1), PCIe 4.0[x8] x 1
- COM Port x 2, GPIO 8-bit, DC 12V in

Serial Port	COM 1 (RS-232/422/485, supports RI only) COM 2 (RS-232/422/485, supports 12V/5V/RI)
Video	eDP 1.4 x 1, up to 3840 x 2160 VGA x 1, up to 1920 x 1080
SATA	SATA 6Gb/s x 2 +5V SATA Power Connector x 2
Audio	Audio Header x 1
DIO/GPIO	GPIO 8-bits
SMBus/I2C	SMBus /I2C (change by BOM, I2C only for Windows 10)
Touch	—
Fan	4 Pin Smart Fan
SIM	Nano SIM x 1
Front Panel	Power Button, Reset Button, Power LED, SATA LED, Buzzer
Others	TCC x 1 (R680E sku only)
Expansion	
Mini PCI-E/mSATA	—
M.2	M.2 2280 M-Key x 1 (PCIe 4.0 [x4] x 1, R680E & Q670E support) M.2 3052 B-Key x 1 (PCIe 3.0 [x1] + USB 3.0) M.2 2230 E-Key x 1 (PCIe 3.0 [x1] + USB 2.0)
Others	PCIe 4.0 [x8] Slot x 1 FPC Connector x 1 (PCIe 3.0 [x2] x 1)
Environment & Certification	
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C) (Note: To achieve the best performance, keeping the EPIC-RPS9 operating with 0.5m/sec airflow when DDR5 SODIMM1 installed on bottom side is recommended)
Storage Temperature	-40°F ~ 185°F (-40°C ~ 85°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
MTBF (Hours)	353,666
EMC	CE/FCC Class A


Packing List

- EPIC-RPS9 x 1
- CPU Cooler Bracket x 2
- Screw Kit x 1

Optional Accessories


Part Number	Description	QTY
170X000593	SATA cable, Length 15 cm	1
1702150155	SATA Power Cable, Length 15cm	1
170X000231	Dual COM Port, Length 30 cm	1
1702200208	3 Pin ATX Cable	1
170010010D	Dual USB2.0 Cable, Length 10 cm	1
170X000517	Audio Cable, Length 20 cm	1
170X000603	Front Panel Cable, Length 10 cm	1
170X000823	3x2 DC in Power Cable	1
EPIC-RPS9-FAN01	CPU Cooler for EPIC-ADS7 & EPIC-RPS9	1

Block Diagram

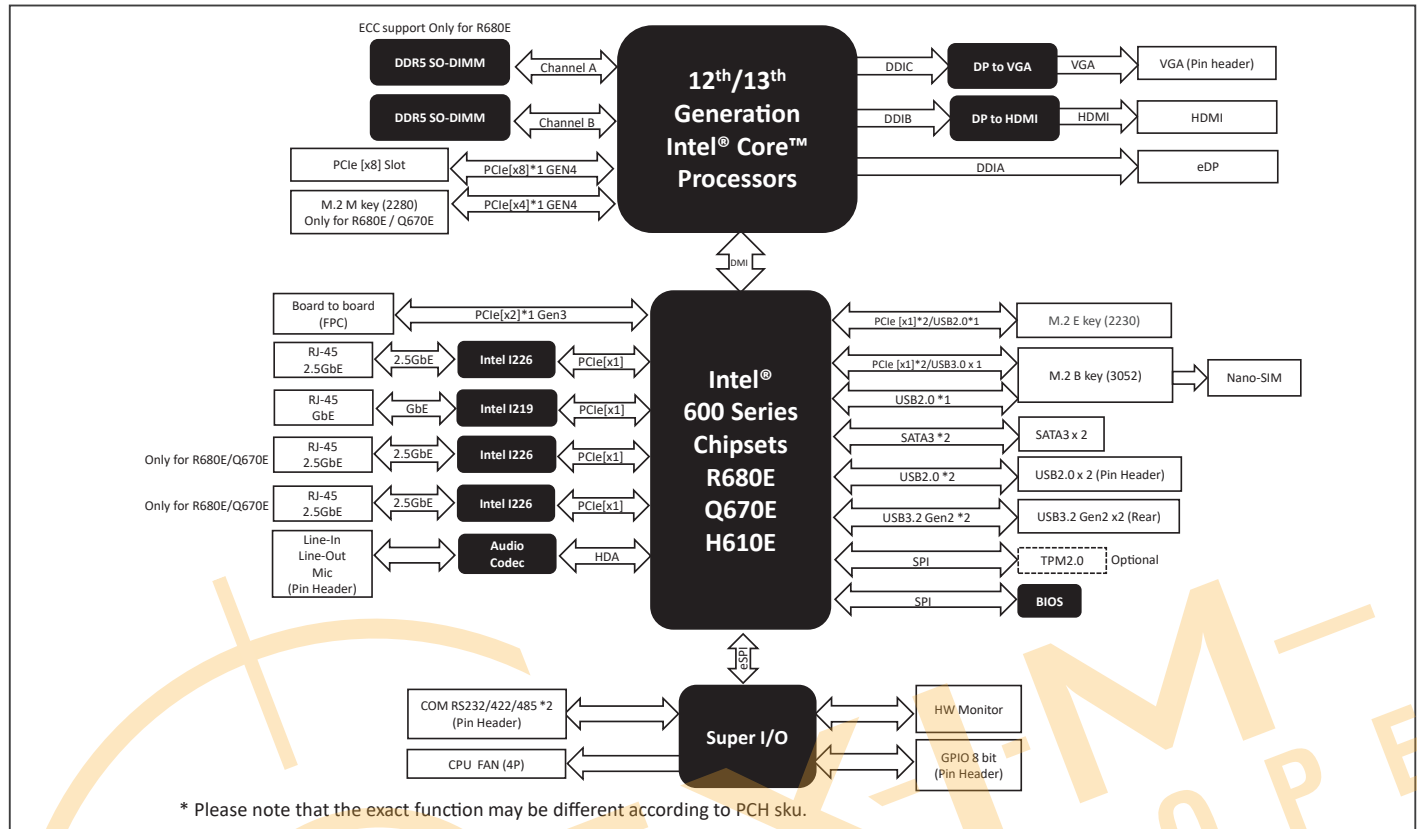

Dimension

Unit: mm

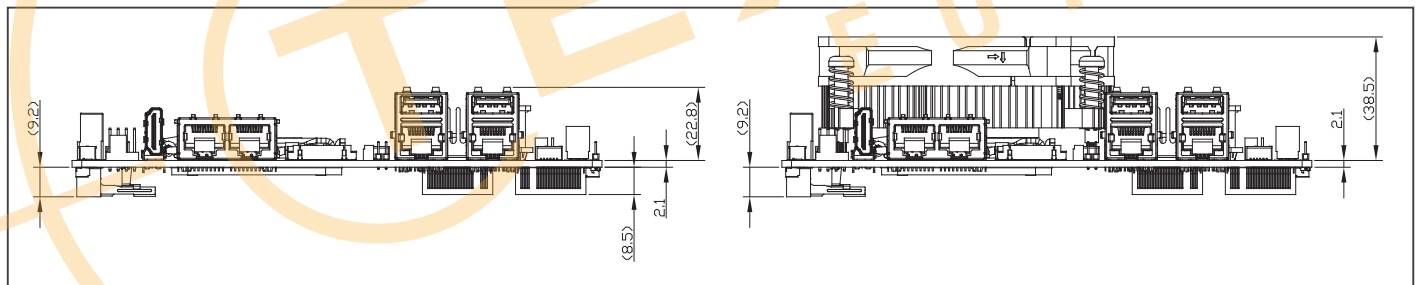

Ordering Information

Part Number	CPU	Memory	Display	Storage	LAN	USB	COM Port	Expansion	TPM	Power	Operating Temperature	Others
EPIC-RPS9-A10-0001	LGA1700 Socket Type (with R680E)	DDR5 SODIMM x 2	eDP x 1, HDMI x 1, VGA x 1	SATA 6.0 Gbps x 2	2.5GbE x 3, GbE x 1	USB3.2 Gen2 x 2, USB2.0 x 2	RS232/422/485 x 2	M.2 2280 M-Key x 1, M.2 3052 B-Key x 1, M.2 2230 E-Key x 1, PCIe[x8] x 1, FPC x 1	Optional	+12Vin (3x2 ATX Connector)	0°C ~ 60°C	GPIO 8 bits, Nano SIM x 1, TCC x 1
EPIC-RPS9-A10-0002	LGA1700 Socket Type (with Q670E)	DDR5 SODIMM x 2 (Non-ECC)	eDP x 1, HDMI x 1, VGA x 1	SATA 6.0 Gbps x 2	2.5GbE x 3, GbE x 1	USB3.2 Gen2 x 2, USB2.0 x 2	RS232/422/485 x 2	M.2 2280 M-Key x 1, M.2 3052 B-Key x 1, M.2 2230 E-Key x 1, PCIe[x8] x 1, FPC x 1	Optional	+12Vin (3x2 ATX Connector)	0°C ~ 60°C	GPIO 8 bits, Nano SIM x 1
EPIC-RPS9-A10-0003	LGA1700 Socket Type (with H610E)	DDR5 SODIMM x 2 (Non-ECC)	eDP x 1, HDMI x 1, VGA x 1	SATA 6.0 Gbps x 2	2.5GbE x 1, GbE x 1	USB3.2 Gen2 x 2, USB2.0 x 2	RS232/422/485 x 2	M.2 3052 B-Key x 1, M.2 2230 E-Key x 1, PCIe[x8] x 1, FPC x 1	Optional	+12Vin (3x2 ATX Connector)	0°C ~ 60°C	GPIO 8 bits, Nano SIM x 1

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.

It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.





Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik

T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: austria@texim-europe.com



Nordic

Stockholmsgade 45
2100 Copenhagen

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com