



SPECIFICATION FOR LCM+CTP Module

MODULE No:	KD030FWFPN022A-C018A
CUSTOMER:	

STARTEK	INITIAL	DATE
PREPARED BY	Distributed by:  www.texim-europe.com	
CHECKED BY		
APPROVED BY		

CUSTOMER	INITIAL	DATE
APPROVED BY		

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 1 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

[illegible]

Distributed by www.texim-europe.com

Contents

1. Basic Specifications	5
1.1 TFT Features	5
1.2 CTP Features	5
1.3 Mechanical Information	6
2. Block Diagram	6
3. Outline dimension	7
4. Input terminal Pin Assignment	8
4.1 TFT PIN Define	8
4.2 CTP PIN Define	9
5. LCD Optical Characteristics	10
5.1 Optical specification	10
6. Electrical Characteristics	13
6.1 Absolute Maximum Rating	13
6.2 DC Electrical Characteristics	13
6.3 LED Backlight Characteristics	14
7. AC Characteristics	16
7.1 Serial Interface Characteristics (3-line serial):	16
7.2. RGB Interface Characteristics :	17
7.3 Reset input timing:	18
8. RGB Interface	20
8.1.1 RGB Color Format	21
8.1.2 RGB Interface Definition	22
8.1.3 RGB Interface Mode Selection	23
8.1.4 RGB Interface Timing	23
9. CTP Specification	25
9.1 Electrical Characteristics	25
9.1.1 Absolute Maximum Rating	25
9.1.2 DC Electrical Characteristics (Ta=25℃)	25
9.1.3 AC Characteristics	26
9.2 POWER ON/Reset Sequence	26
9.3 I2C Timing	28
10. LCD Module Out-Going Quality Level	30
10.1 VISUAL & FUNCTION INSPECTION STANDARD	30
10.1.1 Inspection conditions	30

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 3 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

10.1.2 Definition	30
10.1.3 Sampling Plan	31
10.1.4 Criteria (Visual)	32
11. Reliability Test Result	38
12. Cautions and Handling Precautions	39
12.1 Handling and Operating the Module	39
12.2 Storage and Transportation	39
13. Packing	40



Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 4 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

1.Basic Specifications

* Description

This is a color active matrix TFT (Thin Film Transistor) LCD (liquid crystal display) that uses amorphous silicon TFT as a switching device. This module is composed of a Transmissive type TFT-LCD Panel, driver circuit, capacitance touch panel, back-light unit. The resolution of a 2.95 " TFT-LCD contains 480x854 pixels, and can display up to 262K colors.

1.1 TFT Features

General Information Items	Specification	Unit	Note
	Main Panel		
Display area(AA)	36.72(H)*65.28(V) (2.95 inch)	mm	
Driver element	TFT active matrix	-	
Display colors	65K/262K/16.7M	colors	
Number of pixels	480(RGB)*854	dots	
Pixel arrangement	RGB vertical stripe	-	
Pixel pitch	0.0765(H)*0.07644(V)	mm	
Viewing angle	ALL	o'clock	
Controller IC	ST7701S	-	
LCM Interface	16/18/24/RGB Interface	-	
Display mode	Transmissive /Normally Black	-	
Operating temperature	-30~+85	℃	
Storage temperature	-30~+85	℃	
Module bonding technology	Optical bonding between LCM and CTP	-	

1.2 CTP Features


General Information Items	Specification	Unit	Note
	Main Panel		
Resolution	480(H)*854(V)	-	
Structure	G+G	-	
Controller IC	FT5436	-	
Interface	I2C	-	
Slave Address	0x38(7bit)/8bit:0x70(Write) 0x71(Read)	-	
Touch mode	Multipoint and gesture	-	-

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 5 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	


1.3 Mechanical Information

Item		Min.	Typ.	Max.	Unit	Note
Module size	Horizontal(H)	-	52.72	-	mm	
	Vertical(V)	-	83.28	-	mm	
	Depth(D)	-	4.22	-	mm	
Weight		-	TBD	-	g	

2. Block Diagram

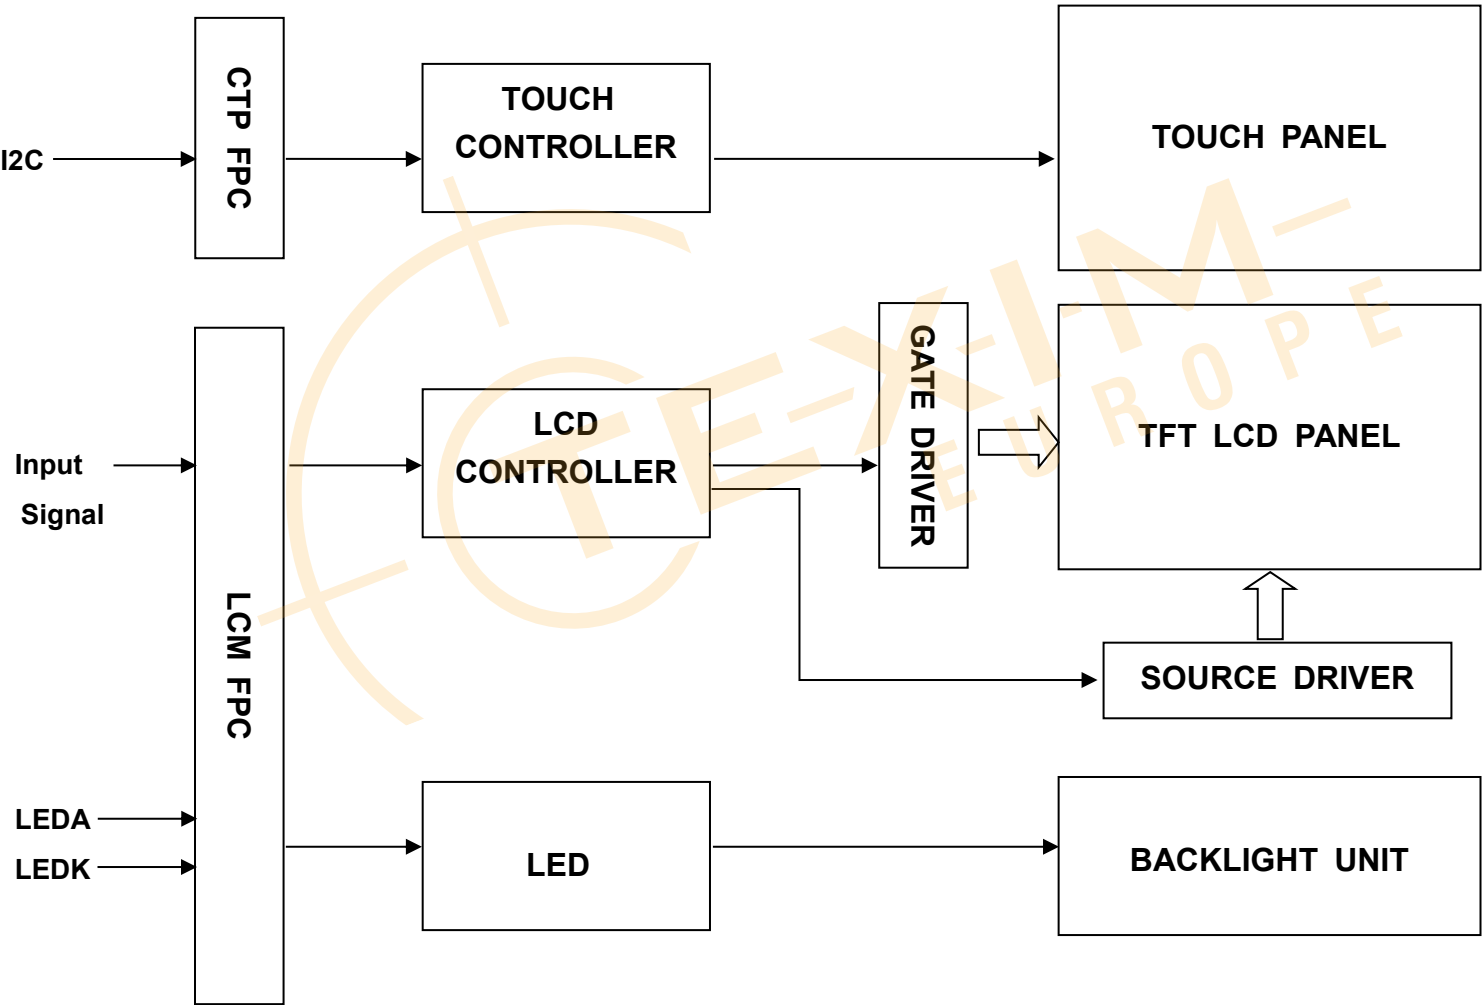

3. Outline dimension

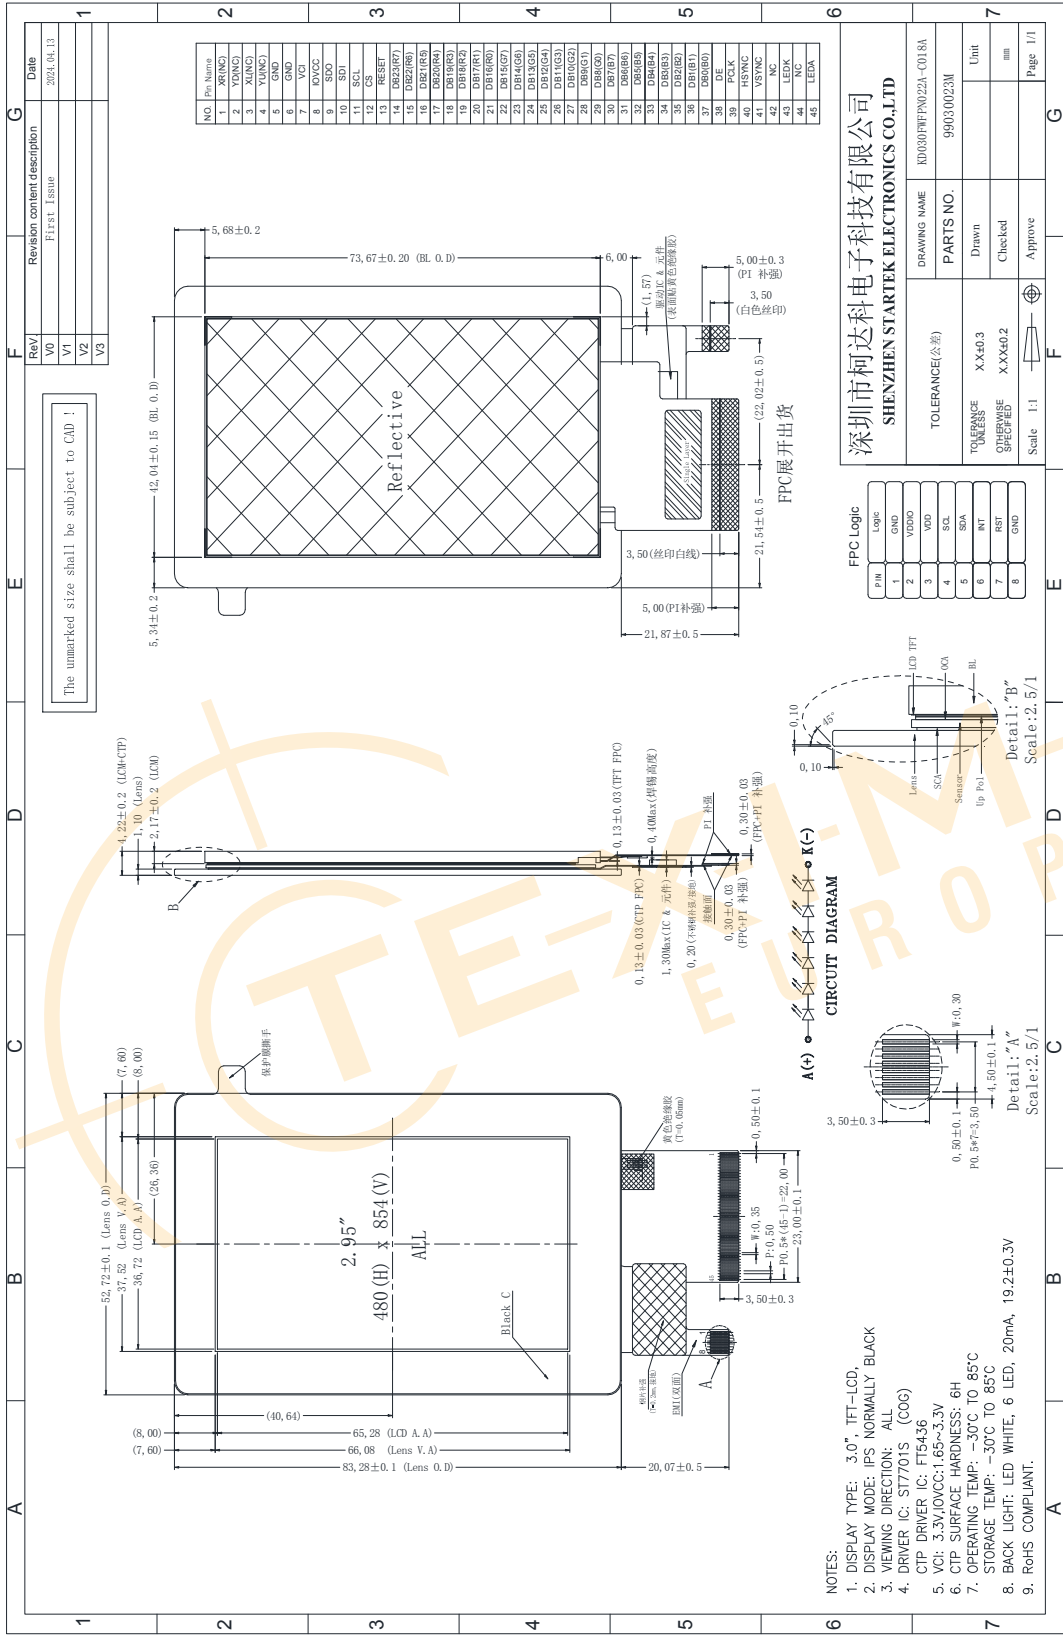

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 7 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

4. Input terminal Pin Assignment

4.1 TFT PIN Define

NO.	SYMBOL	DISCRIPTION	I/O
1	XR/NC	Touch panel Right Glass Terminal. Leave the pin open when not in use.	A/D
2	YD/NC	Touch panel Bottom Film Terminal. Leave the pin open when not in use.	A/D
3	XL/NC	Touch panel Left Glass Terminal. Leave the pin open when not in use.	A/D
4	YU/NC	Touch panel Top Film Terminal. Leave the pin open when not in use.	A/D
5	GND	Ground.	P
6	GND	Ground.	P
7	VCI	Supply voltage (3.3V).	P
8	IOVCC	Supply Voltage (Logic)(1.8~3.3V).	P
9	SDO	Serial data output pin used for the SPI Interface. Leave the pin open when not in use.	O
10	SDI	SDI: Serial data input/output bidirectional pin for SPI Interface.	I/O
11	SCL	SCL: Serial clock input for SPI interface.	I
12	CS	- A chip select signal Low: the chip is selected and accessible High: the chip is not selected and not accessible	I
13	RESET	- The external reset input - Initializes the chip with a low input. Be sure to execute a power-on reset after supplying power.	I
14-37	DB23-DB0	24-bit parallel data bus for RGB Interface. Fix to IOVCC or GND level when not in use.	I/O
38	DE	Data enable signal for RGB interface operation Low: access enabled High: access inhibited Fix to IOVCC or GND level when not in use.	I
39	PCLK	Dot clock signal for RGB interface operation	I
40	HSYNC	Line synchronizing signal for RGB interface operation	I

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 8 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

41	VSYNC	Frame synchronizing signal for RGB interface operation	I
42	NC		
43	LEDK	Cathode pin of backlight.	P
44	NC		
45	LEDA	Anode pin of backlight.	P

4.2 CTP PIN Define

NO.	SYMBOL	DISCRIPTION	I/O
1	GND	Ground	P
2	VDDIO	I/O power supply voltage.	P
3	VDD	Supply voltage	P
4	SCL	I2C clock input	I
5	SDA	I2C data input and output	I
6	INT	External interrupt to the host	I
7	RST	External Reset, Low is active	I
8	GND	Ground	P

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 9 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

5. LCD Optical Characteristics

5.1 Optical specification

Item		Symbol	Condition	Min.	Typ.	Max.	Unit.	Note
Contrast Ratio		CR	$\Theta=0$ Normal viewing angle	800	1000	--		*(1)(2)
Response time	Rising	T_{R+T_F}		--	30	40	msec	*(1)(3)
	Falling							
Color Gamut		S(%)		53	58	--	%	*
Color Filter Chromaticity	White	W_X		-0.04	0.312	+0.04		*(1)(4) CA-310
		W_Y			0.345			
	Red	R_X			0.618			
		R_Y			0.368			
	Green	G_X			0.328			
		G_Y			0.582			
	Blue	B_X			0.145			
		B_Y			0.082			
Viewing angle	Hor.	Θ_L	CR>10	70	80	--	*(1)(4)	
		Θ_R		70	80	--		
	Ver.	Θ_U		70	80	--		
		Θ_D		70	80	--		
Option View Direction		ALL						

*The data comes from the LCD specification.

Measuring Condition

Measuring surrounding : dark room

Ambient temperature : $25 \pm 2^\circ\text{C}$

15min. warm-up time.


Measuring Equipment

FPM520 of Westar Display technologies, INC., which utilized SR-3 for Chromaticity and BM-5A for other optical characteristics.

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 10 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	




Note (1): Definition of Viewing Angle :

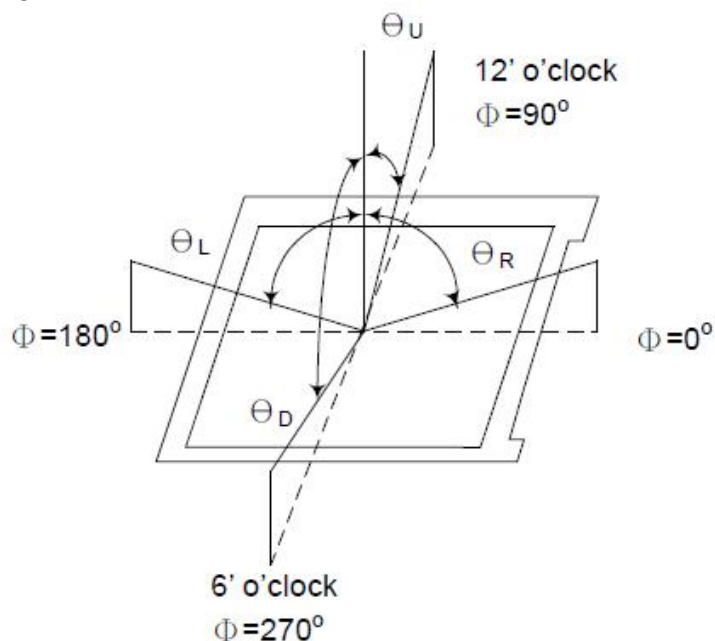

Note (2): Definition of Contrast Ratio(CR) :measured at the center point of panel


$$CR = \frac{\text{Luminance with all pixels white}}{\text{Luminance with all pixels black}}$$

Note (3): Response Time

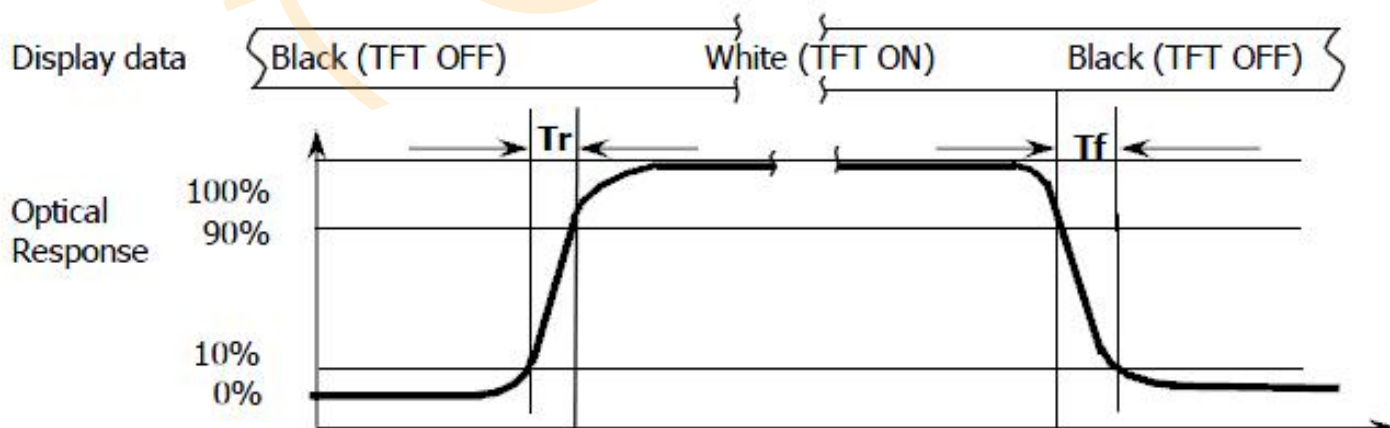

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 11 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

Note (4): Definition of optical measurement setup

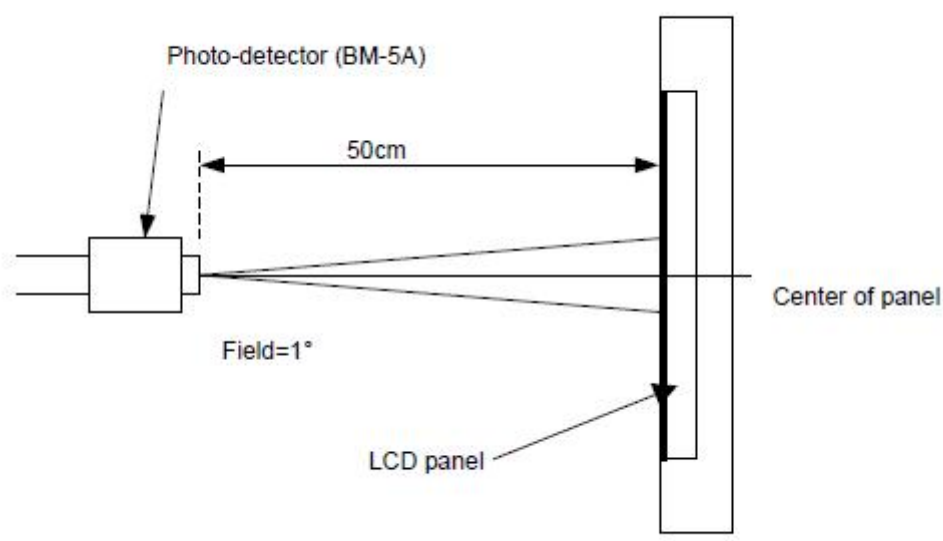

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 12 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

6. Electrical Characteristics

6.1 Absolute Maximum Rating

Characteristics	Symbol	Min.	Max.	Unit	Note
Digital Supply Voltage	V _{CI}	-0.3	4.6	V	Note1
Digital Interface Supply Voltage	IOVCC	-0.3	4.6	V	
Operating temperature	T _{OP}	-30	+85	°C	
Storage temperature	T _{ST}	-30	+85	°C	

NOTE1: If the absolute maximum rating of even is one of the above parameters is exceeded even momentarily, the quality of the product may be degraded. Absolute maximum ratings, therefore, specify the values exceeding which the product may be physically damaged. Be sure to use the product within the range of the absolute maximum ratings.

6.2 DC Electrical Characteristics

Characteristics	Symbol	Min.	Typ.	Max.	Unit	Note
Digital Supply Voltage	V _{CI}	2.5	3.3	3.6	V	
Digital interface supply Voltage	IOVCC	1.65	1.8	3.3	V	
Normal mode Current	ICC	--	22	44	mA	
Level input voltage	V _{IH}	0.7* lovcc	--	lovcc	V	
	V _{IL}	GND	--	0.3* lovcc	V	
Level output voltage	V _{OH}	0.8*lovcc	--	lovcc	V	
	V _{OL}	GND	--	0.2*lovcc	V	

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 13 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

6.3 LED Backlight Characteristics

The back-light system is edge-lighting type with 6 chips LED


Item	Symbol	Min.	Typ.	Max.	Unit	Note
Forward Current	I _F	--	20	--	mA	
Forward Voltage	V _F	16.8	17.3	20.4	V	
LCM Luminance	LV	400	500	--	cd/m2	Note3
LED life time	Hr	50000	--	--	Hour	Note1,2
Uniformity	Avg	80	--	--	%	Note3

Note1: LED life time (Hr) can be defined as the time in which it continues to operate under the condition:

Ta=25±3 °C, typical IL value indicated in the above table until the brightness becomes less than 50%.

Note 2: The “LED life time” is defined as the module brightness decrease to 50% original brightness at


Ta=25℃ and IL=20mA. The LED lifetime could be decreased if operating IL is larger than 20mA. The constant current driving method is suggested.

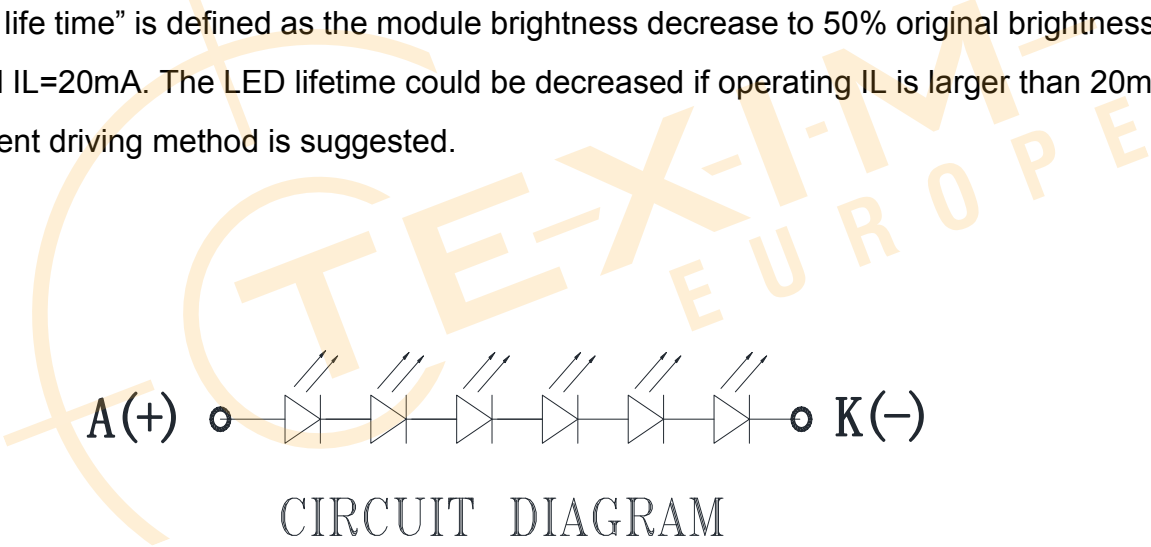

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 14 of 40
常 备 库 存 Stock For Sale	长 期 供 货 Long Time supply	支持小量 NO MOQ	品 种 齐 全 In Full Range	



Note (3) Luminance Uniformity of these 9 points is defined as below:

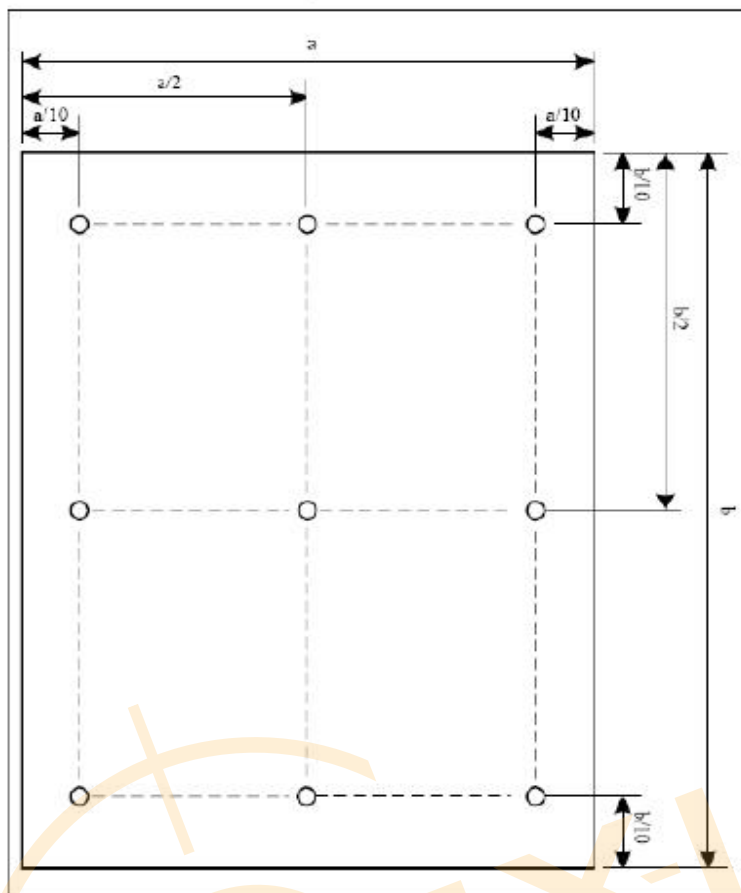


$$\text{Uniformity} = \frac{\text{minimum luminance in 9 points (1-9)}}{\text{maximum luminance in 9 points (1-9)}}$$

$$\text{Luminance} = \frac{\text{Total Luminance of 9 points}}{9}$$

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 15 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

7. AC Characteristics

7.1 Serial Interface Characteristics (3-line serial):

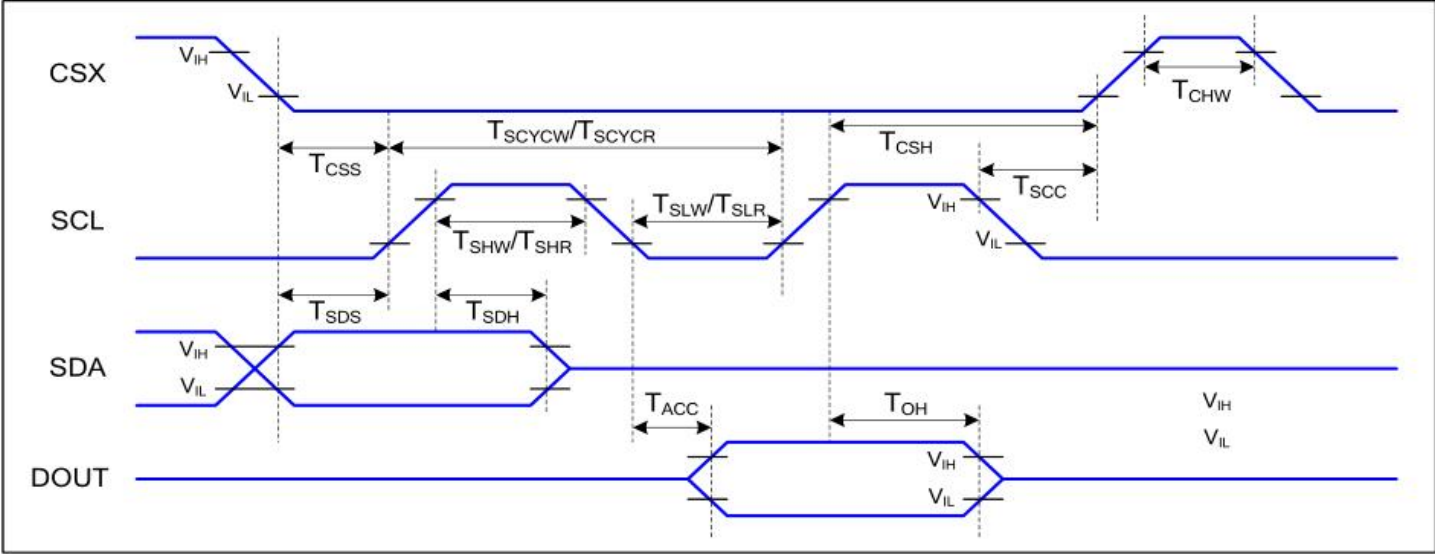


3-line serial Interface Timing Characteristics

IOVCC=1.8V,VCI=2.8V,Ta=25℃

Signal	Symbol	Parameter	Min	Max	Unit	Description
CSX	T _{CSS}	Chip select setup time (write)	15		ns	
	T _{CSH}	Chip select hold time (write)	15		ns	
	T _{CSS}	Chip select setup time (read)	60		ns	
	T _{SCC}	Chip select hold time (read)	60		ns	
	T _{CHW}	Chip select "H" pulse width	40		ns	
SCL	T _{SCYCW}	Serial clock cycle (Write)	66		ns	
	T _{SHW}	SCL "H" pulse width (Write)	15		ns	
	T _{SLW}	SCL "L" pulse width (Write)	15		ns	
	T _{SCYCR}	Serial clock cycle (Read)	150		ns	
	T _{SHR}	SCL "H" pulse width (Read)	60		ns	
	T _{SLR}	SCL "L" pulse width (Read)	60		ns	
SDA (DIN)	T _{SDS}	Data setup time	10		ns	
	T _{SDH}	Data hold time	10		ns	

Note : The rising time and falling time (Tr, Tf) of input signal are specified at 15 ns or less. Logic high and low levels are specified as 30% and 70% of IOVCC for Input signals.


7.2. RGB Interface Characteristics :

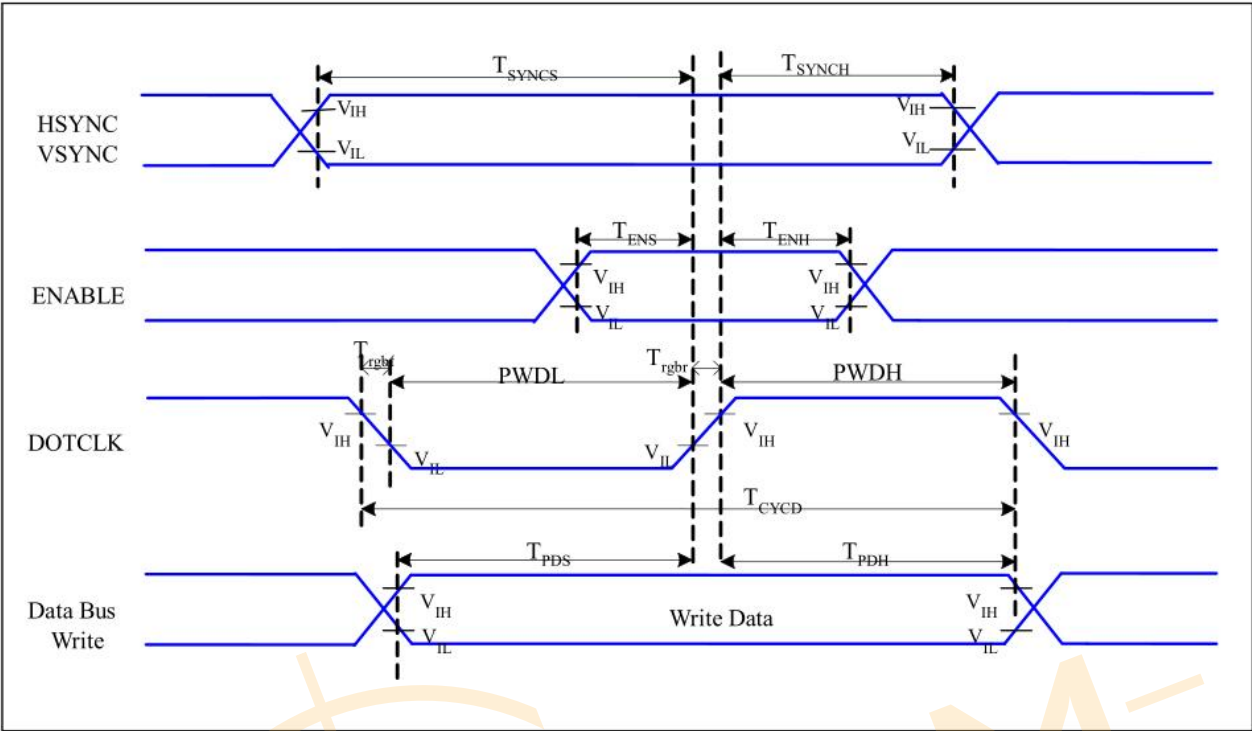

RGB Interface Timing Characteristics

Signal	Symbol	Parameter	MIN	MAX	Unit	Description
HSYNC, VSYNC	T_{SYNCS}	VSYNC, HSYNC Setup Time	5	-	ns	
ENABLE	T_{ENS}	Enable Setup Time	5	-	ns	
	T_{ENH}	Enable Hold Time	5	-	ns	
DOTCLK	PWDH	DOTCLK High-level Pulse Width	15	-	ns	
	PWDL	DOTCLK Low-level Pulse Width	15	-	ns	
	T_{CYCD}	DOTCLK Cycle Time	33	-	ns	
	Trghr, Trghf	DOTCLK Rise/Fall time	-	15	ns	
DB	T_{PDS}	PD Data Setup Time	5	-	ns	
	T_{PDH}	PD Data Hold Time	5	-	ns	

7.3 Reset input timing:

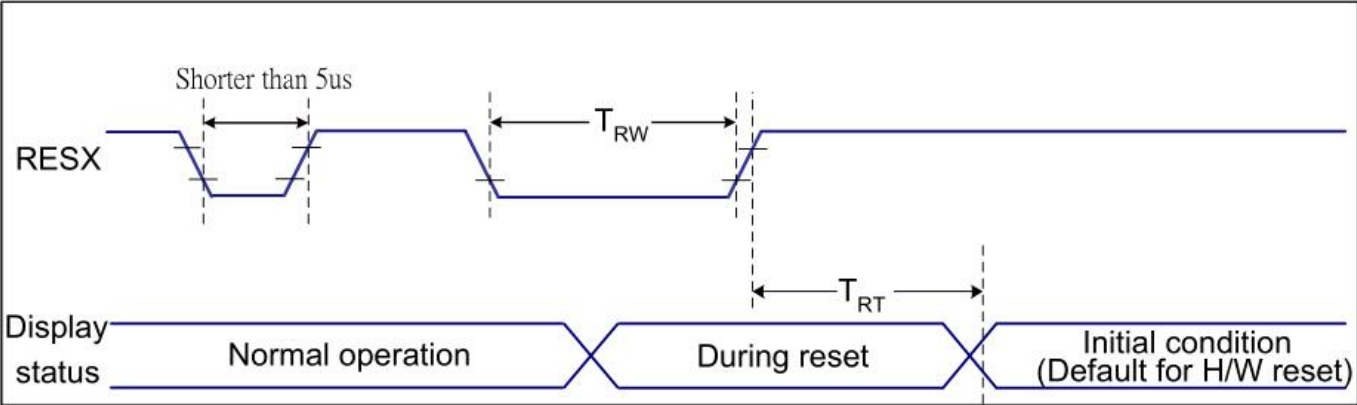

Reset Timing

Related Pins	Symbol	Parameter	MIN	MAX	Unit
RESX	TRW	Reset pulse duration	10	-	us
	TRT	Reset cancel	-	5 (Note 1, 5)	ms
				120(Note 1, 6, 7)	ms

Reset Timing


Notes:

1. The reset cancel includes also required time for loading ID bytes, VCOM setting and other settings from NVM (or similar device) to registers. This loading is done every time when there is HW reset cancel time (t_{RT}) within 5 ms after a rising edge of RESX.
2. Spike due to an electrostatic discharge on RESX line does not cause irregular system reset according to the table below:

RESX Pulse	Action
Shorter than 5us	Reset Rejected
Longer than 9us	Reset
Between 5us and 9us	Reset starts

3. During the Resetting period, the display will be blanked (The display is entering blanking sequence, which maximum time is 120 ms, when Reset Starts in Sleep Out –mode. The display remains the blank state in Sleep In –mode.) and then return to Default condition for Hardware Reset.
4. Spike Rejection also applies during a valid reset pulse as shown below:

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 18 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

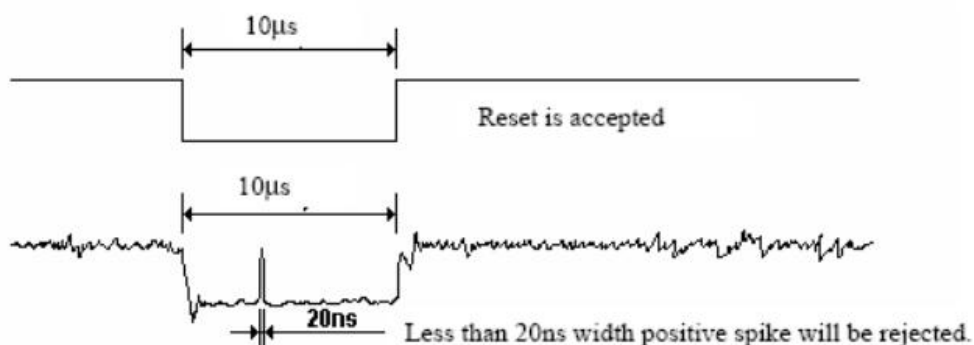

5. When Reset applied during Sleep In Mode.

6. When Reset applied during Sleep Out Mode.

7. It is necessary to wait 5msec after releasing RESX before sending commands. Also Sleep Out command cannot be sent for 120msec.



Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 19 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

8. RGB Interface

The ST7701 support RGB interface Mode 1 and Mode 2. The interface signals as shown in ST7701S datasheet table 6.3.1. The Mode 1 and Mode 2 function is select by setting in the Command 2, please reference application note. In RGB Mode 1, writing data to line buffer is done by PCLK and Video Data Bus (D[23:0]), when DE is high state. The external clocks (PCLK, VS and HS) are used for internal displaying clock. So, controller must always transfer PCLK, VS and HS signal to ST7701. In RGB Mode 2, back porch of Vsync is defined by VBP[5:0] of RGBPRCTR command. And back porch of Hsync is defined by HBP[5:0] of RGBPRCTR command. Front porch of Vsync is defined by VFP[5:0] of RGBPRCTR command. And front porch of Hsync is defined by HFP[5:0] of RGBPRCTR command.

RGB I/F Mode	PCLK	DE	VS	HS	DB[23:0]	Register for Blanking Porch setting
RGB Mode 1	Used	Used	Used	Used	Used	Not Used
RGB Mode 2	Used	Not Used	Used	Used	Used	Used

Symbol	Name	Description
PCLK	Pixel clock	Pixel clock for capturing pixels at display interface
HS	Horizontal sync	Horizontal synchronization timing signal
VS	Vertical sync	Vertical synchronization timing signal
DE	Data enable	Data enable signal (assertion indicates valid pixels)
DB[23:0]	Pixel data	Pixel data in 16-bit, 18-bit and 24-bit format

The interface signals of RGB interface

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 20 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

8.1.1 RGB Color Format

ST7701 supports two kinds of RGB interface, DE mode (mode 1) and HV mode (mode 2), and 16bit/18bit and 24 bit data format. When DE mode is selected and the VSYNC, HSYNC, DOTCLK, DE, D[17:0] pins can be used;when HV mode is selected and the VSYNC, HSYNC, DOTCLK, D[17:0] pins can be used. When using RGB interface, only serial interface can be selected.


Pad name	24 bits configuration VIPF[3:0]=0111	18 bits configuration VIPF[3:0]=0110		16 bits configuration VIPF[3:0]=0101
		MDT=0	MDT=1	
DB[23]	R7	Not used	Not used	Not used
DB[22]	R6	Not used	Not used	Not used
DB[21]	R5	R5	Not used	Not used
DB[20]	R4	R4	Not used	R4
DB[19]	R3	R3	Not used	R3
DB[18]	R2	R2	Not used	R2
DB[17]	R1	R1	R5	R1
DB[16]	R0	R0	R4	R0
DB[15]	G7	Not used	R3	Not used
DB[14]	G6	Not used	R2	Not used
DB[13]	G5	G5	R1	G5
DB[12]	G4	G4	R0	G4
DB[11]	G3	G3	G5	G3
DB[10]	G2	G2	G4	G2
DB[09]	G1	G1	G3	G1
DB[08]	G0	G0	G2	G0
DB[07]	B7	Not used	G1	Not used
DB[06]	B6	Not used	G0	Not used
DB[05]	B5	B5	B5	Not used
DB[04]	B4	B4	B4	B4
DB[03]	B3	B3	B3	B3
DB[02]	B2	B2	B2	B2
DB[01]	B1	B1	B1	B1
DB[00]	B0	B0	B0	B0

The interface color mapping of RGB interface

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 21 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

8.1.2 RGB Interface Definition

The display operation via the RGB interface is synchronized with the VSYNC, HSYNC, and DOTCLK signals. The data can be written only within the specified area with low power consumption by using window address function. The back porch and front porch are used to set the RGB interface timing.

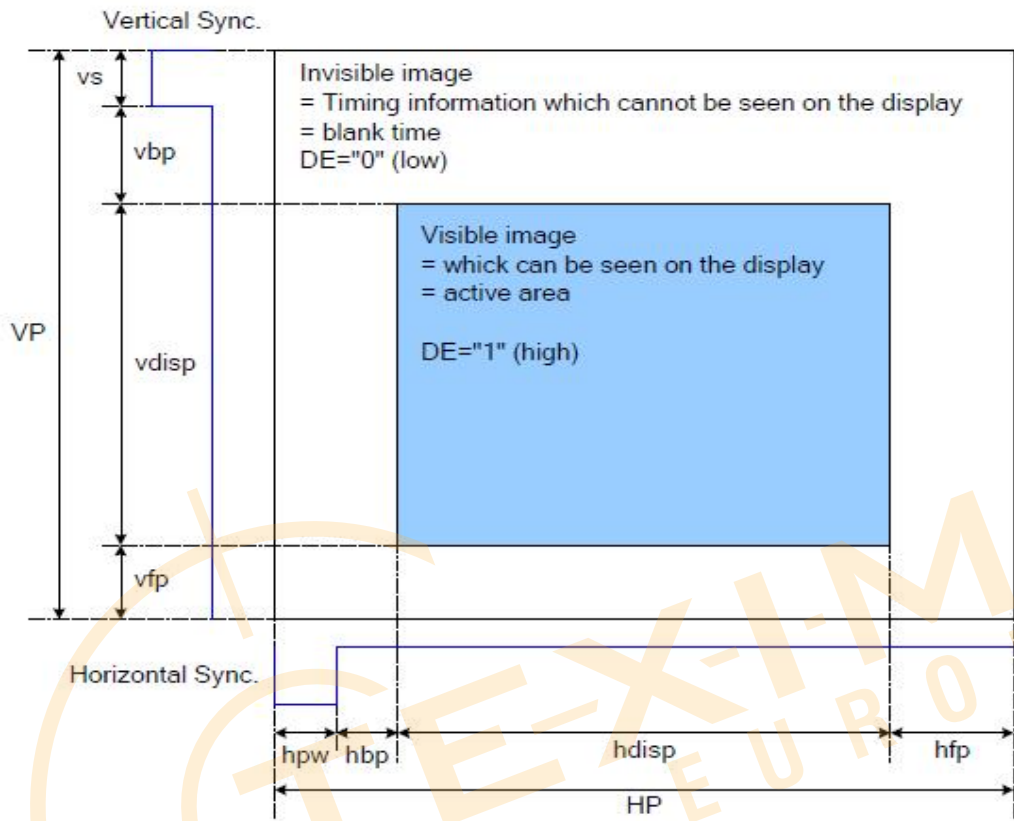

DRAM Access Area by RGB Interface

Please refer to the following table for the setting limitation of RGB interface signals.

Parameter	Symbol	Min.	Typ.	Max.	Unit
DCLK frequency	FCLK	--	(31)	--	MHz
Horizontal Sync. Width	hpw	1	(4)	255	Clock
Horizontal Sync. Back Porch	hbp	1	(40)	255	Clock
Horizontal Sync. Front Porch	hfp	1	(20)	--	Clock
Vertical Sync. Width	vs	1	(4)	254	Line
Vertical Sync. Back Porch	vbp	1	(60)	254	Line
Vertical Sync. Front Porch	vfp	1	(30)	--	Line

Note:

1. Typical value are related to the setting frame rate is 60Hz..

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 22 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	


8.1.3 RGB Interface Mode Selection

ST7701 supports two kinds of RGB interface, DE mode and HV mode. The table shown below uses command C3h to select RGB interface mode.

DE/Sync	RGB Mode
0	DE mode
1	HV mode

8.1.4 RGB Interface Timing

The timing chart of RGB interface DE mode is shown as follows.

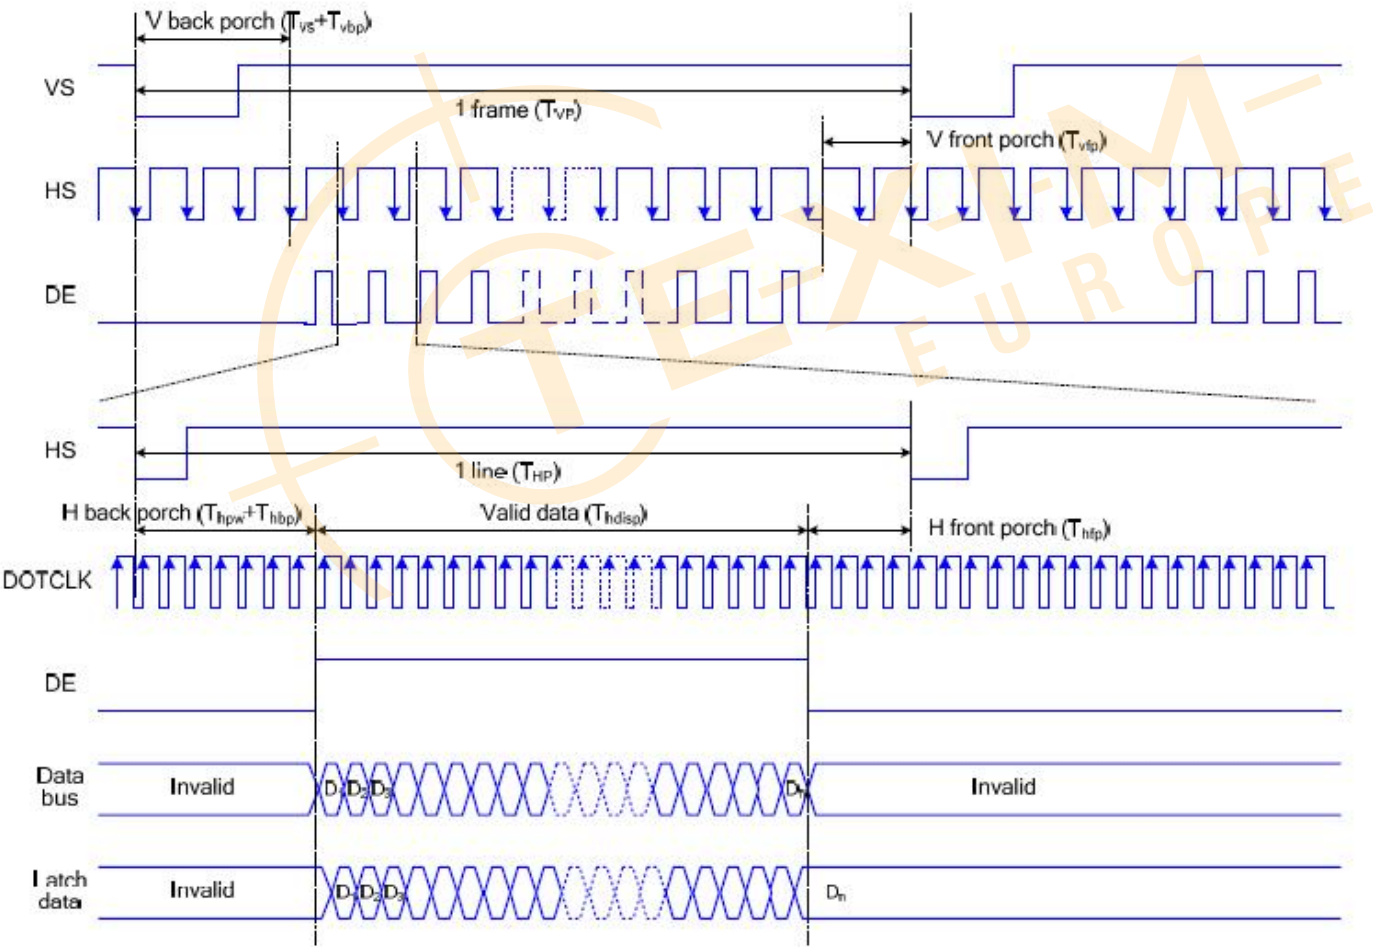


Note: The setting of front porch and back porch in host must match that in IC as this mode.

Timing Chart of Signals in RGB Interface DE Mode

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 23 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

The timing chart of RGB interface HV mode is shown as follows.

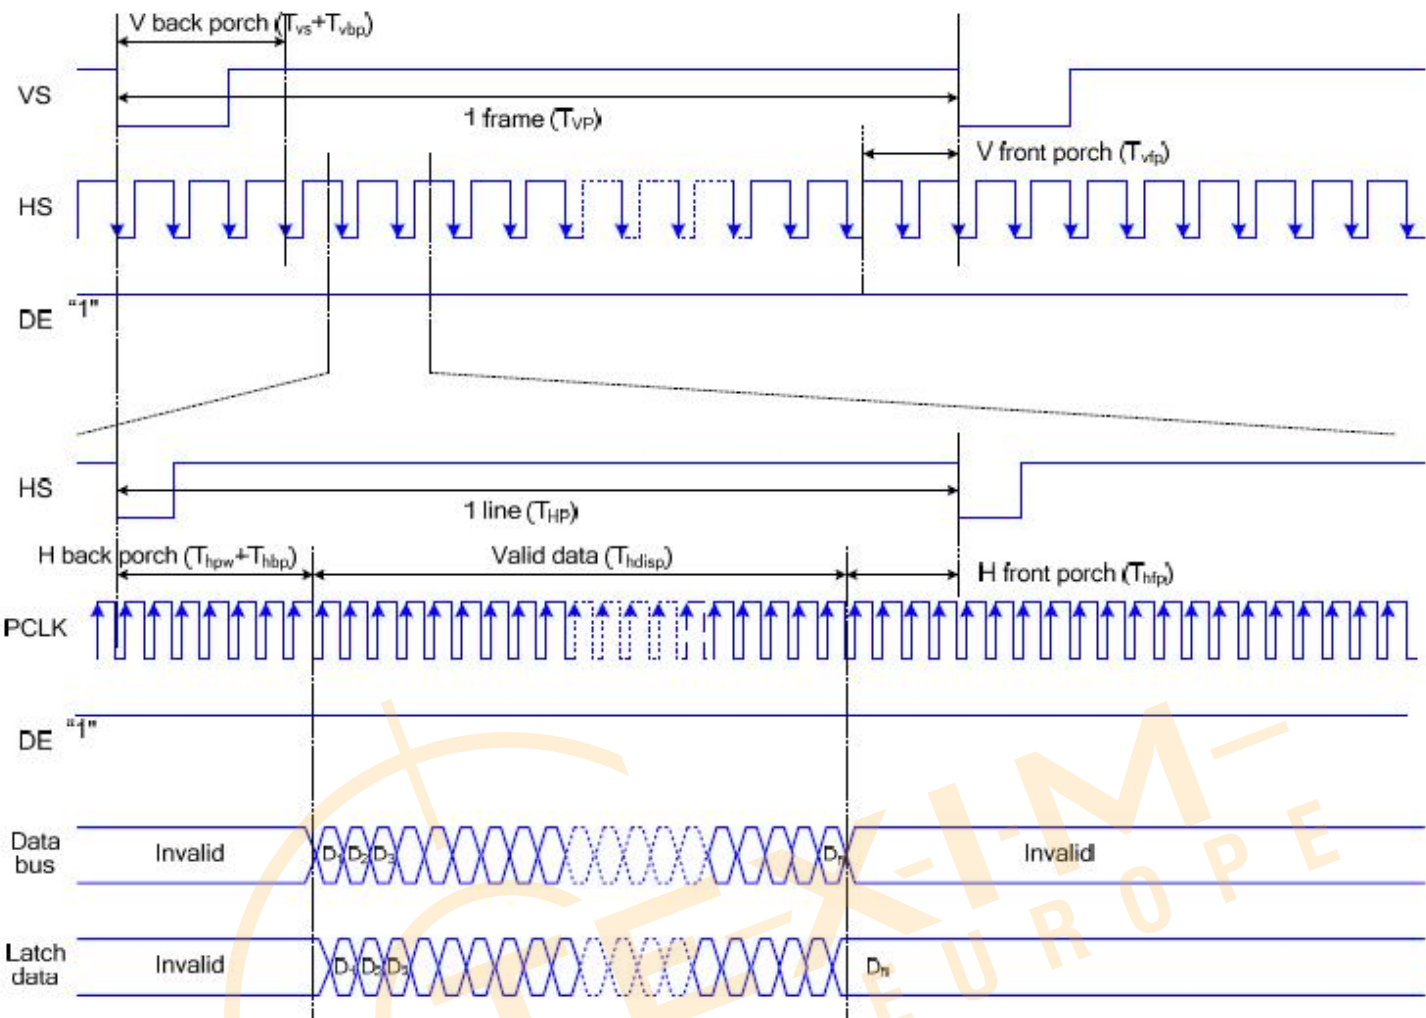

Timing chart of RGB interface HV mod

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 24 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

9. CTP Specification

9.1 Electrical Characteristics

9.1.1 Absolute Maximum Rating

Item	Symbol	Min.	Max.	Unit	Note
Power Supply Voltage	VDD	2.7	3.6	V	--
I/O Digital Voltage	VDDIO	1.8	3.6	V	--
Operating temperature	T _{OP}	-30	+85	°C	--
Storage temperature	T _{ST}	-30	+85	°C	--

9.1.2 DC Electrical Characteristics (Ta=25°C)

(Ambient temperature:25°C , AVDD=2.8V, VDDIO=1.8V or VDDIO=AVDD)

Item	Symbol	Unit	Test Condition	Min.	Typ.	Max.	Note
Input high-level voltage	VIH	V		0.7 x IOVCC	--	IOVCC	
Input low -level voltage	VIL	V		-0.3	--	0.3 x IOVCC	
Output high -level voltage	VOH	V	IOH=3mA	0.7 x IOVCC	--	--	
Output low -level voltage	VOL	V	IOL=4.5mA	--	--	0.3 x IOVCC	
I/O leakage current	ILI	uA	Vin=0~VDD3	-1	--	1	
Current consumption (Normal operation mode)	Iopr	mA	VDD3 = 3V Ta=25°C	--	11	--	
Current consumption (Monitor mode)	Imon	mA	VDD3 = 3V Ta=25°C	--	0.43	--	
Current consumption (Sleep mode)	Islp	uA	VDD3 = 3V Ta=25°C	--	42	--	
Step-up output voltage	VDD5	V	VDD3= 2.8V		0.25		
Step-up output voltage	VDD10	V	VDD3= 2.8V		0.5		
Power Supply voltage	VDD3	V		2.7	--	3.6	

Notes: This sample data is intended for design guidance only. Values shown are typical for a 15Tx × 24Rx sensor configured at 80 Hz report rate.Actual current will depend on the particular sensor design and firmware options.

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 25 of 40
常 备 库 存 Stock For Sale	长 期 供 货 Long Time supply	支持小量 NO MOQ	品 种 齐 全 In Full Range	

9.1.3 AC Characteristics

AC Characteristics of Oscillators

Item	Symbol	Unit	Test Condition	Min.	Typ.	Max.	Note
OSC clock 1	fosc1	MHz	VDD3 = 2.8V; Ta=25°C	49	50	51	

Table 3-3 AC Characteristics of TX & RX

Item	Symbol	Test Condition	Min	Typ	Max	Unit	Note
TX acceptable clock	ftx		50	150	400	KHz	
TX output rise time	Ttxr		--	210	--	nS	
TX output fall time	Ttxf		--	210	--	nS	
RX input voltage	Trxi		1.2	--	1.6	V	

9.2 POWER ON/Reset Sequence

Reset should be pulled down to be low before powering on and powering down. I2C shouldn't be used by other devices during Reset time after VDD powering on (Trtp). INT signal will be sent to the host after initializing all parameters and then start to report points to the host. If Power is down, the voltage of supply must be below 0.3V and Tpdtd is more than 1ms.

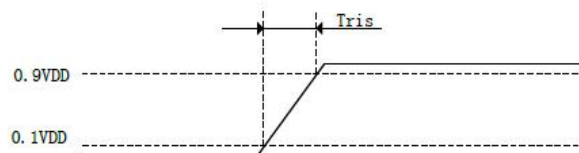


Figure 3-3 Power on time

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 26 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

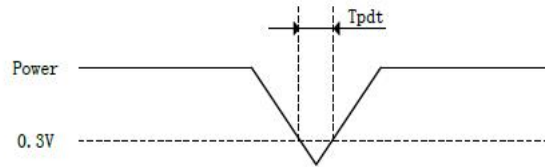


Figure 3-4 Power Cycle requirement

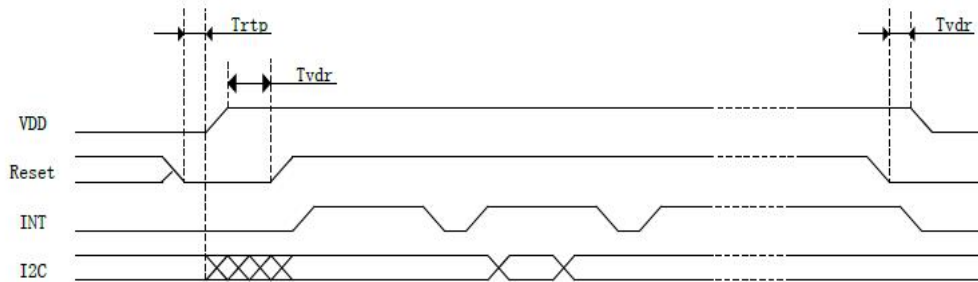


Figure 3-5 Power on Sequence

Reset time must be enough to guarantee reliable reset, the time of starting to report point after resetting approach to the time of starting to report point after powering on.

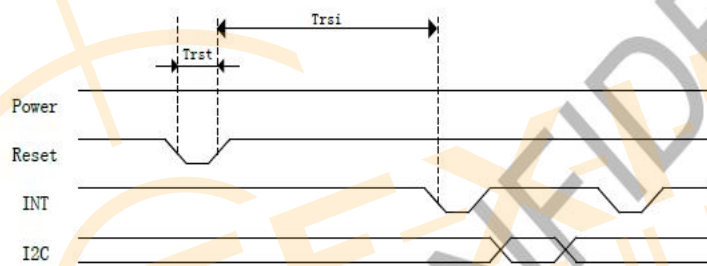


Table 3-5 Power on/Reset Sequence Parameters

Parameter	Description	Min	Max	Units
Tris	Rise time from 0.1VDD to 0.9VDD	--	5	ms
Tpdt	Time of the voltage of supply being below 0.3V	5	--	ms
Trtp	Time of resetting to be low before powering on	100	--	μs
Tvdr	Reset time after VDD powering on	1	--	ms
Trsi	Time of starting to report point after resetting	--	200	ms
Trst	Reset time	1	--	ms

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 27 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

9.3 I2C Timing

FT5436 supports the I2C interfaces, which can be used by a host processor or other devices.

The I2C is always configured in the Slave mode. The data transfer format is shown in **Figure 2-4**.

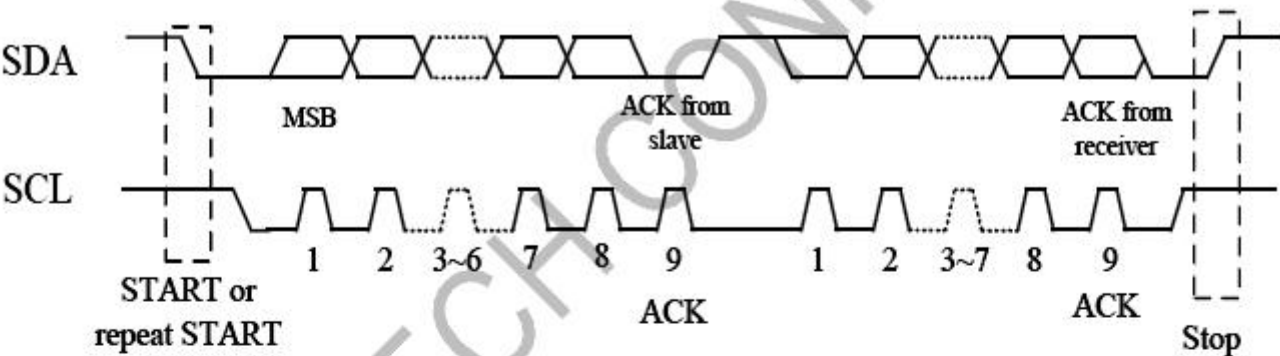


Figure 2-4 I2C Serial Data Transfer Format



Figure 2-5 I2C master write, slave read

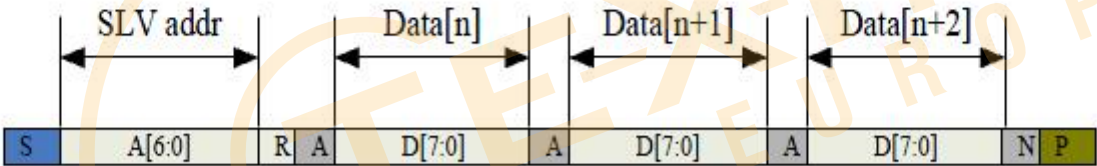


Figure 2-6 I2C master read, slave write

Table 2-1 lists the meanings of the mnemonics used in the above figures.

Table 2-1 Mnemonics Description

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 28 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

Mnemonics	Description
S	I2C Start or I2C Restart
A[6:0]	Slave address
R/ W	READ/WRITE bit, '1' for read, '0'for write
A(N)	ACK(NACK) bit
P	STOP: the indication of the end of a packet (if this bit is missing, S will indicate the end of the current packet and the beginning of the next packet)

I2C Interface Timing Characteristics is shown in Table 2-2.

Table 2-2 I2C Timing Characteristics

Parameter	Min	Max	Unit
SCL frequency	0	400	KHz
Bus free time between a STOP and START condition	1.3		us
Hold time (repeated) START condition	0.6		us
Data setup time	100		ns
Setup time for a repeated START condition	0.6		us
Setup Time for STOP condition	0.6		us

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 29 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	


10. LCD Module Out-Going Quality Level

10.1 VISUAL & FUNCTION INSPECTION STANDARD


10.1.1 Inspection conditions

Inspection performed under the following conditions is recommended.

- Temperature : 25±5℃
- Humidity : 65%±10%RH
- Viewing Angle : Normal viewing Angle.
- Illumination: Single fluorescent lamp (300 to 700Lux)
- Viewing distance:30-50cm

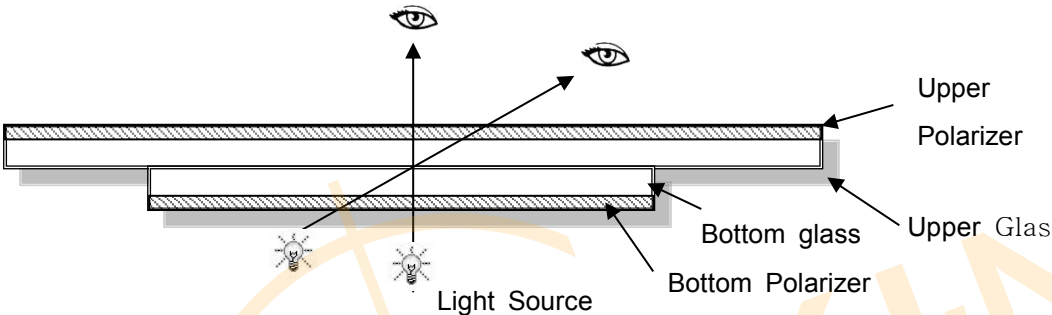

10.1.2 Definition

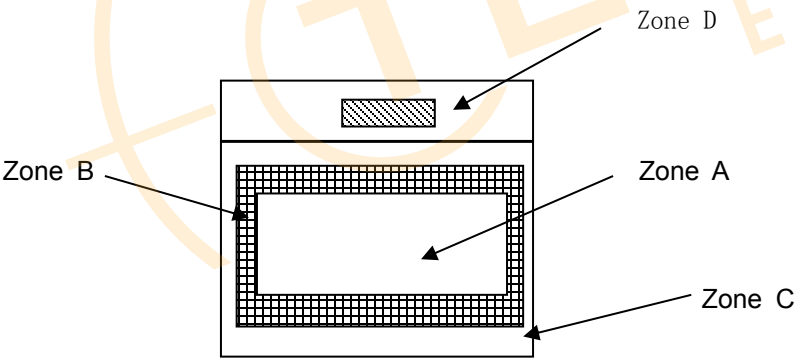

- Zone A : Effective Viewing Area(Character or Digit can be seen)
 - Zone B : Viewing Area except Zone A
 - Zone C : Outside (Zone A+Zone B) which can not be seen after assembly by customer
 - Zone D : IC Bonding Area
- Note:As a general rule ,visual defects in Zone C can be ignored when it doesn't effect product function or appearance after assembly by customer

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 30 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

10.1.3 Sampling Plan

According to GB/T 2828-2012 ; , normal inspection, Class II

AQL:

Major defect	Minor defect
0.65	1.5

LCD: Liquid Crystal Display , LCM: Liquid Crystal Module, CTP: Capacitive Touch Panel




No	Items to be inspected	Criteria	Classification of defects
1	Functional defects	1) No display, Open or miss line 2) Display abnormally, Short 3) Backlight no lighting, abnormal lighting. etc	Major
2	Missing	Missing components and etc	
3	Outline dimension	Overall outline dimension beyond the drawing is not allowed, deformation and etc	
4	Color tone	Color unevenness, refer to limited sample	Minor
5	Spot/Line defect	Light dot, Dim spot, (Note1) Polarizer Air Bubble, Polarizer accidented spot and etc.	
6	Soldering appearance	Good soldering , Peeling off is not allowed and etc.	
7	LCD/Polarizer/CTP	Black/White spot/line, scratch, crack, etc.	

Note1: a) Light dot: Dots appear bright and unchanged in size in which LCD panel is displaying under black pattern.

b) Dim dot: Dots appear dark and unchanged in size in which LCD panel is displaying under pure red, green, blue picture.


Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 31 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

10.1.4 Criteria (Visual)

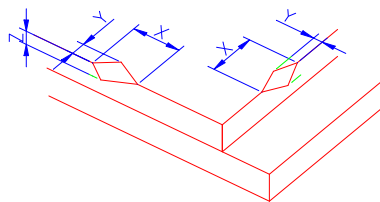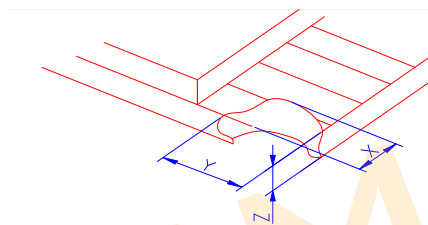Number	Items	Criteria(mm)						
1.0 LCD Crack/Broken NOTE: X: Length Y: Width Z: Height L: Length of IT O, T: Height of LCD	(1) The edge of LCD broken	 <table><tr><td>X</td><td>Y</td><td>Z</td></tr><tr><td>≤3.0mm</td><td><Inner border line of the seal</td><td>≤T</td></tr></table>	X	Y	Z	≤3.0mm	<Inner border line of the seal	≤T
	X	Y	Z					
	≤3.0mm	<Inner border line of the seal	≤T					
(2)LCD corner broken	 <table><tr><td>X</td><td>Y</td><td>Z</td></tr><tr><td>≤3.0mm</td><td>≤L</td><td>≤T</td></tr></table>	X	Y	Z	≤3.0mm	≤L	≤T	
X	Y	Z						
≤3.0mm	≤L	≤T						
(3) LCD crack	 Crack Not allowed							

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 32 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

Spot defect



$\Phi=(X+Y)/2$

① light dot (black/white spot , pinhole, stain, etc.)

Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi\leq0.15$	Ignore	Ignore	
$0.15<\Phi\leq0.25$	3(distance $\geq 6\text{mm}$)		
$0.25<\Phi\leq0.4$	2(distance $\geq 6\text{mm}$)		
$\Phi>0.4$	0		

② Dim spot (light leakage, dent, dark spot, etc)


Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi\leq0.15$	Ignore	Ignore	
$0.15<\Phi\leq0.25$	3(distance $\geq 6\text{mm}$)		
$0.25<\Phi\leq0.4$	2(distance $\geq 6\text{mm}$)		
$\Phi>0.4$	0		

③ Polarizer accidented spot

Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi\leq0.2$	Ignore		Ignore
$0.2<\Phi\leq0.5$	2(distance $\geq 6\text{mm}$)		
$\Phi>0.5$	0		

④Polarizer Bubble


Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi\leq0.2$	Ignore		Ignore
$0.2<\Phi\leq0.4$	3(distance $\geq 6\text{mm}$)		
$\Phi>0.4$	0		


3.0	LCD Pixel defect	Pixel bad points																							
<table> <tr> <th>Item</th><th>Zone A</th><th>Acceptable Qt</th></tr> <tr> <td rowspan="3">Bright dot</td><td>Random</td><td>N≤2</td></tr> <tr> <td>2 dots adjacent</td><td>N≤0</td></tr> <tr> <td>3 dots adjacent</td><td>N≤0</td></tr> <tr> <td rowspan="3">Dark dot</td><td>Random</td><td>N≤2</td></tr> <tr> <td>2 dots adjacent</td><td>N≤0</td></tr> <tr> <td>3 dots adjacent</td><td>N≤0</td></tr> <tr> <td>Distance</td><td> 1. Minimum Distance Between Bright dots. 2. Minimum Distance Between dark dots 3. Minimum Distance Between dark and bright dot. </td><td>5mm</td></tr> <tr> <td colspan="2">Total bright and dark dot</td><td>N≤4</td></tr> </table>			Item	Zone A	Acceptable Qt	Bright dot	Random	N≤2	2 dots adjacent	N≤0	3 dots adjacent	N≤0	Dark dot	Random	N≤2	2 dots adjacent	N≤0	3 dots adjacent	N≤0	Distance	1. Minimum Distance Between Bright dots. 2. Minimum Distance Between dark dots 3. Minimum Distance Between dark and bright dot.	5mm	Total bright and dark dot		N≤4
Item	Zone A	Acceptable Qt																							
Bright dot	Random	N≤2																							
	2 dots adjacent	N≤0																							
	3 dots adjacent	N≤0																							
Dark dot	Random	N≤2																							
	2 dots adjacent	N≤0																							
	3 dots adjacent	N≤0																							
Distance	1. Minimum Distance Between Bright dots. 2. Minimum Distance Between dark dots 3. Minimum Distance Between dark and bright dot.	5mm																							
Total bright and dark dot		N≤4																							
Note: A) Bright dot: Dots appear bright and unchanged in size in which LCD panel is displaying under black pattern. B) Dark dot: Dots appear dark and unchanged in size in which LCD panel is displaying under pure red, green, blue picture. C) 2 dot adjacent = 1 pair = 2 dots Picture:  2 dot adjacent  2 dot adjacent (vertical)  2 dot adjacent  2 dot adjacent (slant)																									

4.0	Line defect (LCD /Polarizer backlight black/white line, scratch, stain)				
					
	W: width, L : length				
	N : Count				
	Width(mm)	Length(m m)	Acceptable Qty		
			A	B	C
	$\Phi \leq 0.03$	Ignore	Ignore		Ignore
	$0.03 < W \leq 0.04$	$L \leq 3.0$	$N \leq 2$		
	$0.04 < W \leq 0.05$	$L \leq 2.0$	$N \leq 1$		
	$W > 0.05$	Define as spot defect			
5.0	Electronic Components SMT.	Not allow missing parts, solderless connection, cold solder joint, mismatch, The positive and negative polarity opposite			
6.0	Display color& Brightness.	1. Color: Measuring the color coordinates, The measurement standard according to the datasheet or samples. 2. Brightness: Measuring the brightness of White screen, The measurement standard according to the datasheet or Samples.			
7.0	LCD Mura/Waving/ Hot spot	Not visible through 5% ND filter in 50% gray or judge by limit sample if necessary.			

8.0	CTP Related	CTP Cover sensor acc idented black/white spot	Size Φ (mm)	Acceptable Qty		
			A	B	C	
			$\Phi \leq 0.1$	Ignore		Ignore
			$0.1 < \Phi \leq 0.2$	3 (distance $\geq 6\text{mm}$)		
			$0.20 < \Phi \leq 0.25$	2 (distance $\geq 6\text{mm}$)		
			$\Phi > 0.25$	0		

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 35 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

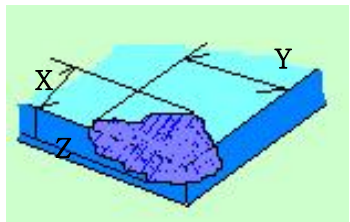		<table><tr><td rowspan="5">CTP Cover scratch</td><td>Width(mm)</td><td>Ignore (mm)</td><td colspan="3">Acceptable Qty</td></tr><tr><td></td><td></td><td>A</td><td>B</td><td>C</td></tr><tr><td>$\Phi \leq 0.03$</td><td>Ignore</td><td colspan="3">Ignore</td></tr><tr><td>$0.03 < W \leq 0.04$</td><td>$L \leq 3.0$</td><td colspan="3">$N \leq 2$</td></tr><tr><td>$0.04 < W \leq 0.05$</td><td>$L \leq 2.0$</td><td colspan="3">$N \leq 1$</td></tr><tr><td></td><td>$0.05 < W$</td><td colspan="4">Define as spot defect</td></tr></table>	CTP Cover scratch	Width(mm)	Ignore (mm)	Acceptable Qty					A	B	C	$\Phi \leq 0.03$	Ignore	Ignore			$0.03 < W \leq 0.04$	$L \leq 3.0$	$N \leq 2$			$0.04 < W \leq 0.05$	$L \leq 2.0$	$N \leq 1$				$0.05 < W$	Define as spot defect			
CTP Cover scratch	Width(mm)	Ignore (mm)		Acceptable Qty																														
				A	B	C																												
	$\Phi \leq 0.03$	Ignore		Ignore																														
	$0.03 < W \leq 0.04$	$L \leq 3.0$		$N \leq 2$																														
	$0.04 < W \leq 0.05$	$L \leq 2.0$	$N \leq 1$																															
	$0.05 < W$	Define as spot defect																																
	CTP Cover Pinhole/ Lack of ink	<table><tr><td rowspan="5"> Zone Size (mm) </td><td colspan="2">Acceptable Qty</td></tr><tr><td colspan="2">C</td></tr><tr><td colspan="2">Ignore</td></tr><tr><td colspan="2">$3(\text{distance} \geq 6\text{mm})$</td></tr><tr><td colspan="2">$2(\text{distance} \geq 6\text{mm})$</td></tr><tr><td></td><td>$\Phi > 0.3$</td><td colspan="2">0</td></tr></table>	Zone Size (mm)	Acceptable Qty		C		Ignore		$3(\text{distance} \geq 6\text{mm})$		$2(\text{distance} \geq 6\text{mm})$			$\Phi > 0.3$	0																		
Zone Size (mm)	Acceptable Qty																																	
	C																																	
	Ignore																																	
	$3(\text{distance} \geq 6\text{mm})$																																	
	$2(\text{distance} \geq 6\text{mm})$																																	
	$\Phi > 0.3$	0																																
	CTP Bonding bubble/ accidented spot	<table><tr><td rowspan="5">Size Φ(mm)</td><td colspan="2">Acceptable Qty</td></tr><tr><td>A</td><td>B</td></tr><tr><td colspan="2">Ignore</td></tr><tr><td colspan="2">$3(\text{distance} \geq 6\text{mm})$</td></tr><tr><td colspan="2">$2(\text{distance} \geq 6\text{mm})$</td></tr><tr><td></td><td>$\Phi > 0.25$</td><td colspan="2">0</td></tr></table>	Size Φ (mm)	Acceptable Qty		A	B	Ignore		$3(\text{distance} \geq 6\text{mm})$		$2(\text{distance} \geq 6\text{mm})$			$\Phi > 0.25$	0																		
Size Φ (mm)	Acceptable Qty																																	
	A	B																																
	Ignore																																	
	$3(\text{distance} \geq 6\text{mm})$																																	
	$2(\text{distance} \geq 6\text{mm})$																																	
	$\Phi > 0.25$	0																																
	Assembly deflection	beyond the edge of backlight $\leq 0.2\text{mm}$																																
	CTP cover broken X : length Y : width Z : height	<table><tr><td>X</td><td>Y</td><td>Z</td></tr><tr><td>$X \leq 0.5\text{mm}$</td><td>$Y \leq 0.5\text{mm}$</td><td>$Z < \text{cover thickness}$</td></tr></table> Circuitry broken is not allowed.	X	Y	Z	$X \leq 0.5\text{mm}$	$Y \leq 0.5\text{mm}$	$Z < \text{cover thickness}$																										
X	Y	Z																																
$X \leq 0.5\text{mm}$	$Y \leq 0.5\text{mm}$	$Z < \text{cover thickness}$																																
																																		

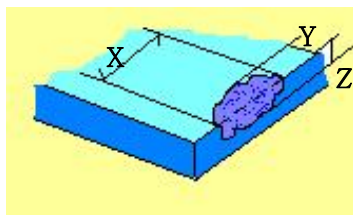							
			X	Y	Z		
		CTP cover broken X : length Y : width Z : height	$X \leq 0.3\text{mm}$	$Y \leq 0.3\text{mm}$	$Z < \text{cover thickness}$ s		
			* Circuitry broken is not allowed.				

Criteria (functional items)

Number	Items	Criteria (mm)
1	No display	Not allowed
2	Missing segment	Not allowed
3	Short	Not allowed
4	Backlight no lighting	Not allowed
5	CTP no function	Not allowed

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 37 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

11. Reliability Test Result

Item	Condition	Inspection after test
High Temperature Operating	85°C,96H	Inspection after 2~4hours storage at room temperature, the sample shall be free from defects: 1.Air bubble in the LCD; 2.Non-display; 3.Missing segments/line; 4.Glass crack; 5.Current IDD is twice higher than initial value.
Low Temperature Operating	-30°C, 96HR	
High Temperature Storage	85°C, 96HR	
Low Temperature Storage	-30°C, 96HR	
High Temperature & High Humidity Operating	+60°C, 90% RH ,96 hours.	
Thermal Shock (Non-operation)	-10°C,30 min ↔ +60°C,30 min, Change time:5min 20CYC.	
ESD test	C=150pF, R=330,5points/panel Air:±8KV, 5times; Contact:±6KV, 5 times; (Environment: 15°C~35°C, 30%~60%).	
Vibration (Non-operation)	Frequency range:10~55Hz, Stroke:1.5mm Sweep:10Hz~55Hz~10Hz 2 hours for each direction of X.Y.Z. (6 hours for total) (Package condition).	
Box Drop Test	1 Corner 3 Edges 6 faces,80cm(MEDIUM BOX)	

Remark:

- 1.The test samples should be applied to only one test item.
- 2.Sample size for each test item is 5~10pcs.
- 3.For Damp Proof Test, Pure water(Resistance > 10MΩ) should be used.
- 4.In case of malfunction defect caused by ESD damage, if it would be recovered to normal state after resetting, it would be judged as a good part.
- 5.Failure Judgment Criterion: Basic Specification, Electrical Characteristic, Mechanical Characteristic, Optical Characteristic.
6. The color fading mura of polarizing filter should not care.

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 38 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

12. Cautions and Handling Precautions

12.1 Handling and Operating the Module

(1) When the module is assembled, it should be attached to the system firmly.

Do not warp or twist the module during assembly work.

(2) Protect the module from physical shock or any force. In addition to damage, this may cause improper operation or damage to the module and back-light unit.

(3) Note that polarizer is very fragile and could be easily damaged. Do not press or scratch the surface.

(4) Do not allow drops of water or chemicals to remain on the display surface.

If you have the droplets for a long time, staining and discoloration may occur.

(5) If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.

(6) The desirable cleaners are water, IPA (Isopropyl Alcohol) or Hexane.

Do not use ketene type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.

(7) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, legs, or clothes, it must be washed away thoroughly with soap.

(8) Protect the module from static; it may cause damage to the CMOS ICs.

(9) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.

(10) Do not disassemble the module.

(11) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.

(12) Pins of I/F connector shall not be touched directly with bare hands.

(13) Do not connect, disconnect the module in the "Power ON" condition.

(14) Power supply should always be turned on/off by the item 6.1 Power On Sequence & 6.2 Power Off Sequence

12.2 Storage and Transportation.

(1) Do not leave the panel in high temperature, and high humidity for a long time.

It is highly recommended to store the module with temperature from 0 to 35 °C and relative humidity of less than 70%

(2) Do not store the TFT-LCD module in direct sunlight.

(3) The module shall be stored in a dark place. When storing the modules for a long time, be sure to adopt effective measures for protecting the modules from strong ultraviolet radiation, sunlight, or fluorescent light.


(4) It is recommended that the modules should be stored under a condition where no condensation is allowed. Formation of dewdrops may cause an abnormal operation or a failure of the module.

In particular, the greatest possible care should be taken to prevent any module from being operated where condensation has occurred inside.

(5) This panel has its circuitry FPC on the bottom side and should be handled carefully in order not to be stressed.

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 39 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

13. Packing

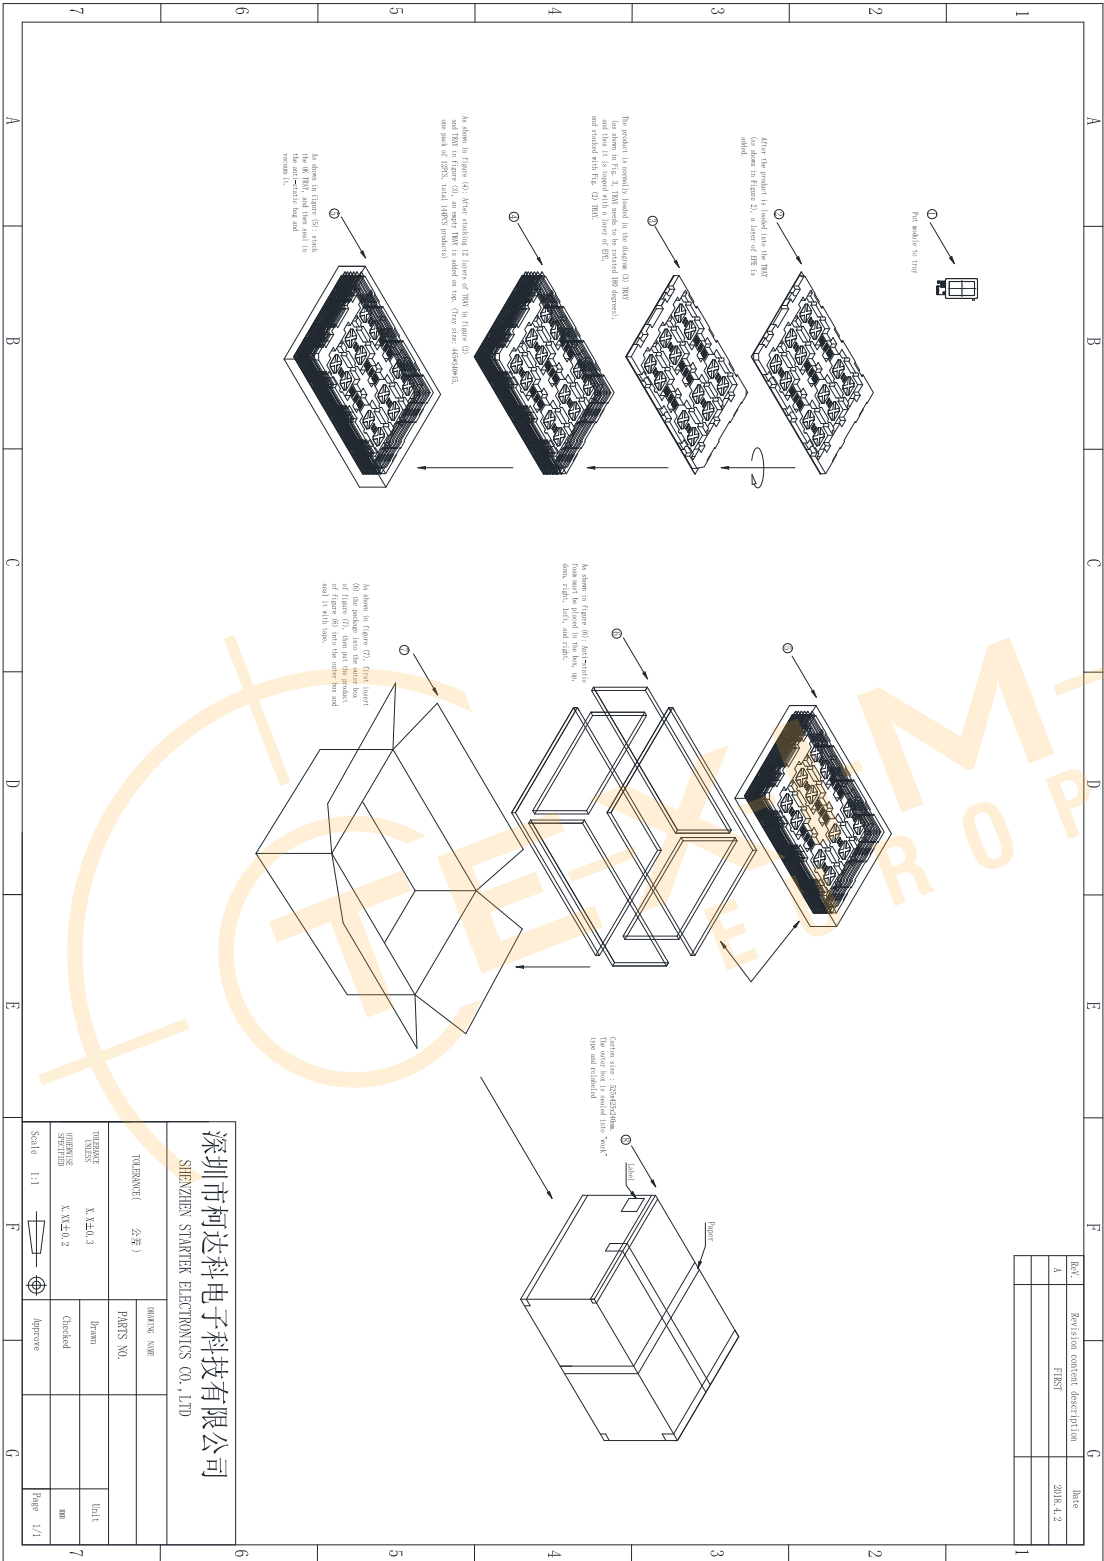

Part. No	KD030FWFPN022-C018A	REV	V1.0	Page 40 of 40
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.


It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

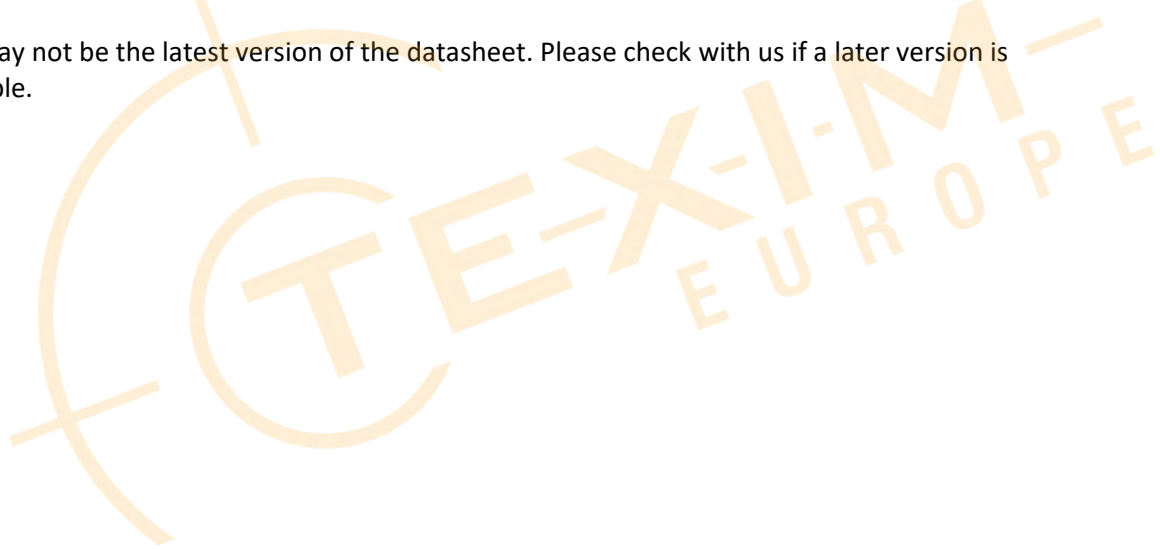



Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik

T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: austria@texim-europe.com



Nordic

Stockholmsgade 45
2100 Copenhagen

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com