



SPECIFICATION FOR LCM+CTP Module

MODULE No:	KD050WVFLA072-C039A
CUSTOMER:	

STARTEK	INITIAL	DATE
PREPARED BY	Distributed by:  www.texim-europe.com	
CHECKED BY		
APPROVED BY		

CUSTOMER	INITIAL	DATE
APPROVED BY		

Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 1 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

[illegible]

Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 2 of 36
常 备 库 存 Stock For Sale	长 期 供 货 Long Time supply	支持小量 NO MOQ	品 种 齐 全 In Full Range	

Contents

1. Description.....	5
1.1 TFT Features.....	5
1.2 CTP Features.....	5
1.3 Mechanical Information.....	6
2. Block Diagram.....	6
3. Outline dimension.....	7
4. Input terminal Pin Assignment.....	8
4.1 TFT PIN Define.....	8
4.2 CTP PIN Define.....	10
5. LCD Optical Characteristics.....	11
5.1 Optical specification.....	11
6. Electrical Characteristics.....	14
6.1 Absolute Maximum Rating.....	14
6.2 DC Electrical Characteristics.....	14
6.3 LED Backlight Characteristics.....	15
7. LVDS Signal Timing Characteristics.....	17
7.1 AC Electrical Characteristics.....	17
7.2 Timing Table.....	18
7.3 LVDS Data Input Format.....	19
8. CTP Specification.....	20
8.1 Electrical Characteristics.....	20
8.1.1 Absolute Maximum Rating.....	20
8.1.2 DC Electrical Characteristics (Ta=25°C).....	20
8.1.3 AC Characteristics.....	21
8.2 I2C Timing.....	21
9. LCD Module Out-Going Quality Level.....	26
9.1 VISUAL & FUNCTION INSPECTION STANDARD.....	26
9.1.1 Inspection conditions.....	26
9.1.2 Definition.....	26
9.1.3 Sampling Plan.....	27
9.1.4 Criteria (Visual).....	28
10. Reliability Test Result.....	34
11. Cautions and Handling Precautions.....	35
11.1 Handling and Operating the Module.....	35

Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 3 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



11.2 Storage and Transportation.....	35
12. Packing.....	36



Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 4 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



1. Description

This is a color active matrix TFT (Thin Film Transistor) LCD (liquid crystal display) that uses amorphous silicon TFT as a switching device. This module is composed of a Transmissive type TFT-LCD Panel, driver circuit, capacitance touch panel, back-light unit. The resolution of a 5.0" TFT-LCD contains 800x480 pixels, and can display up to 16.7M colors.

1.1 TFT Features

General Information Items	Specification	Unit	Note
	Main Panel		
Display area(AA)	108.0(H)*64.80(V) (5.0inch)	mm	
Driver element	TFT active matrix	-	
Display colors	16.7M	colors	
Number of pixels	800(RGB)*480	dots	
Pixel arrangement	RGB vertical stripe	-	
Pixel pitch	0.135(H)*0.135(V)	mm	
Viewing angle	ALL	o'clock	
Controller IC	ST7262	-	
Display mode	Transmissive /Normally Black	-	
LCM Interface	4-Lane LVDS / 8BIT LVDS	-	
Operating temperature	-30~+85	°C	
Storage temperature	-30~+85	°C	
Module bonding technology	Use Tape bonding between LCM and CTP	-	

1.2 CTP Features

General Information Items	Specification	Unit	Note
	Main Panel		
Resolution	800(H)*480(V)	-	
Structure	G+G	-	
Controller IC	GT911	-	
Interface	I2C	-	
Slave Address	0x5D(7bit) or 0x14(7bit)	-	Note1
Touch mode	Five points	-	-

Note1: For specific configuration method, please refer to section 8.2


Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 5 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



1.3 Mechanical Information


Item		Min.	Typ.	Max.	Unit	Note
Module size	Horizontal(H)	-	132.72	-	mm	
	Vertical(V)	-	87.8	-	mm	
	Depth(D)	-	4.9	-	mm	
Weight		-	TBD	-	g	

2. Block Diagram

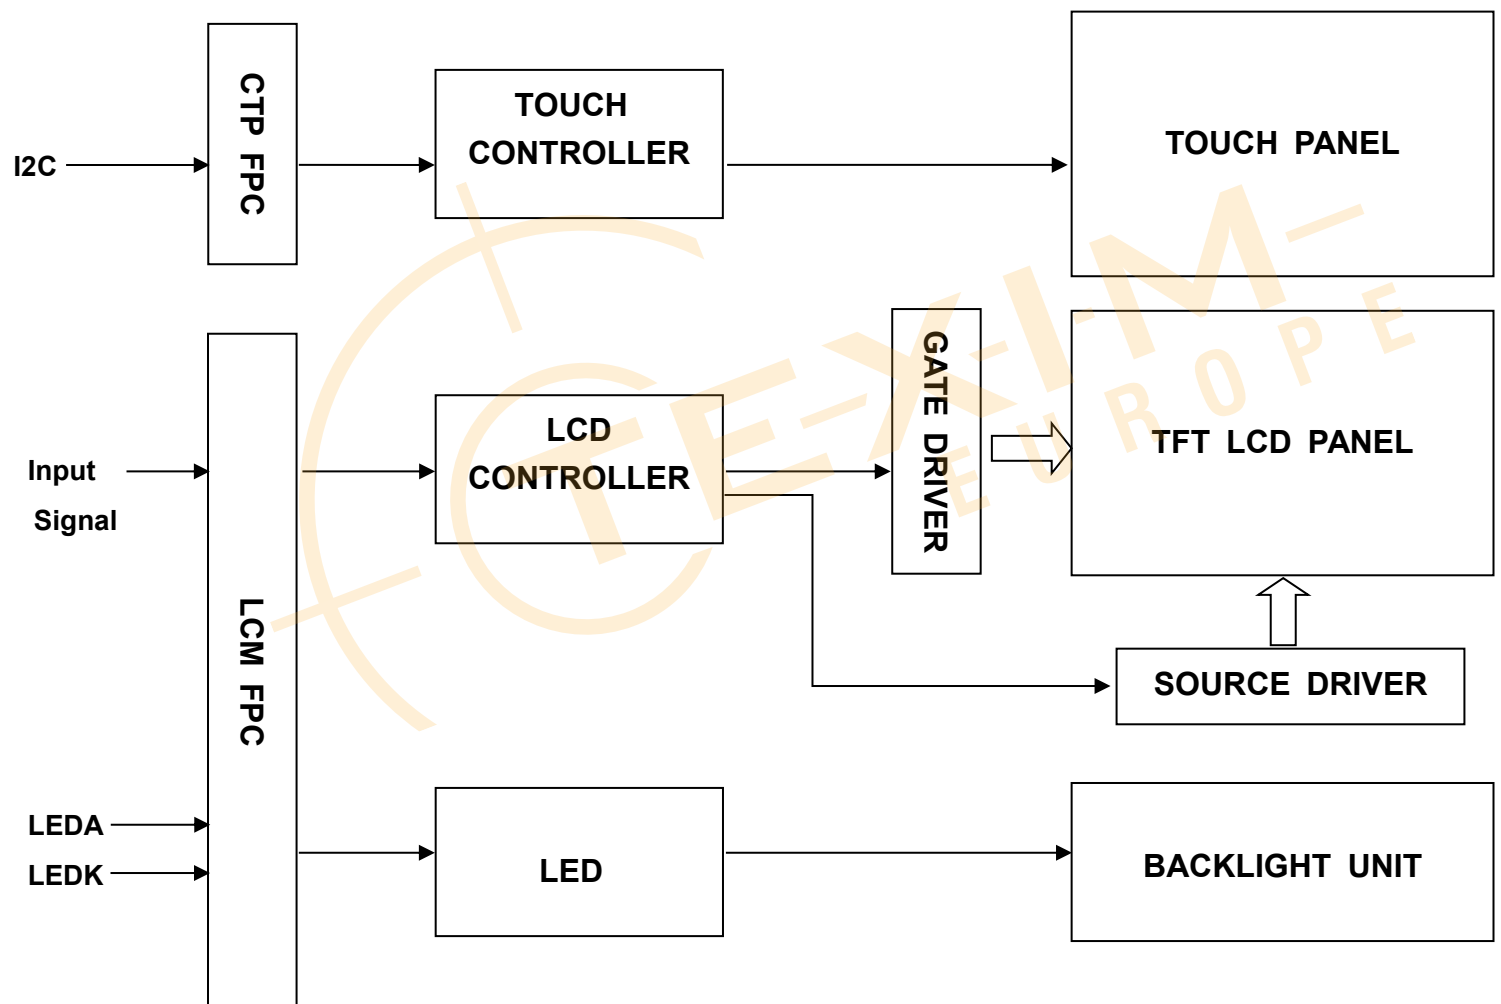

Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 6 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

3. Outline dimension

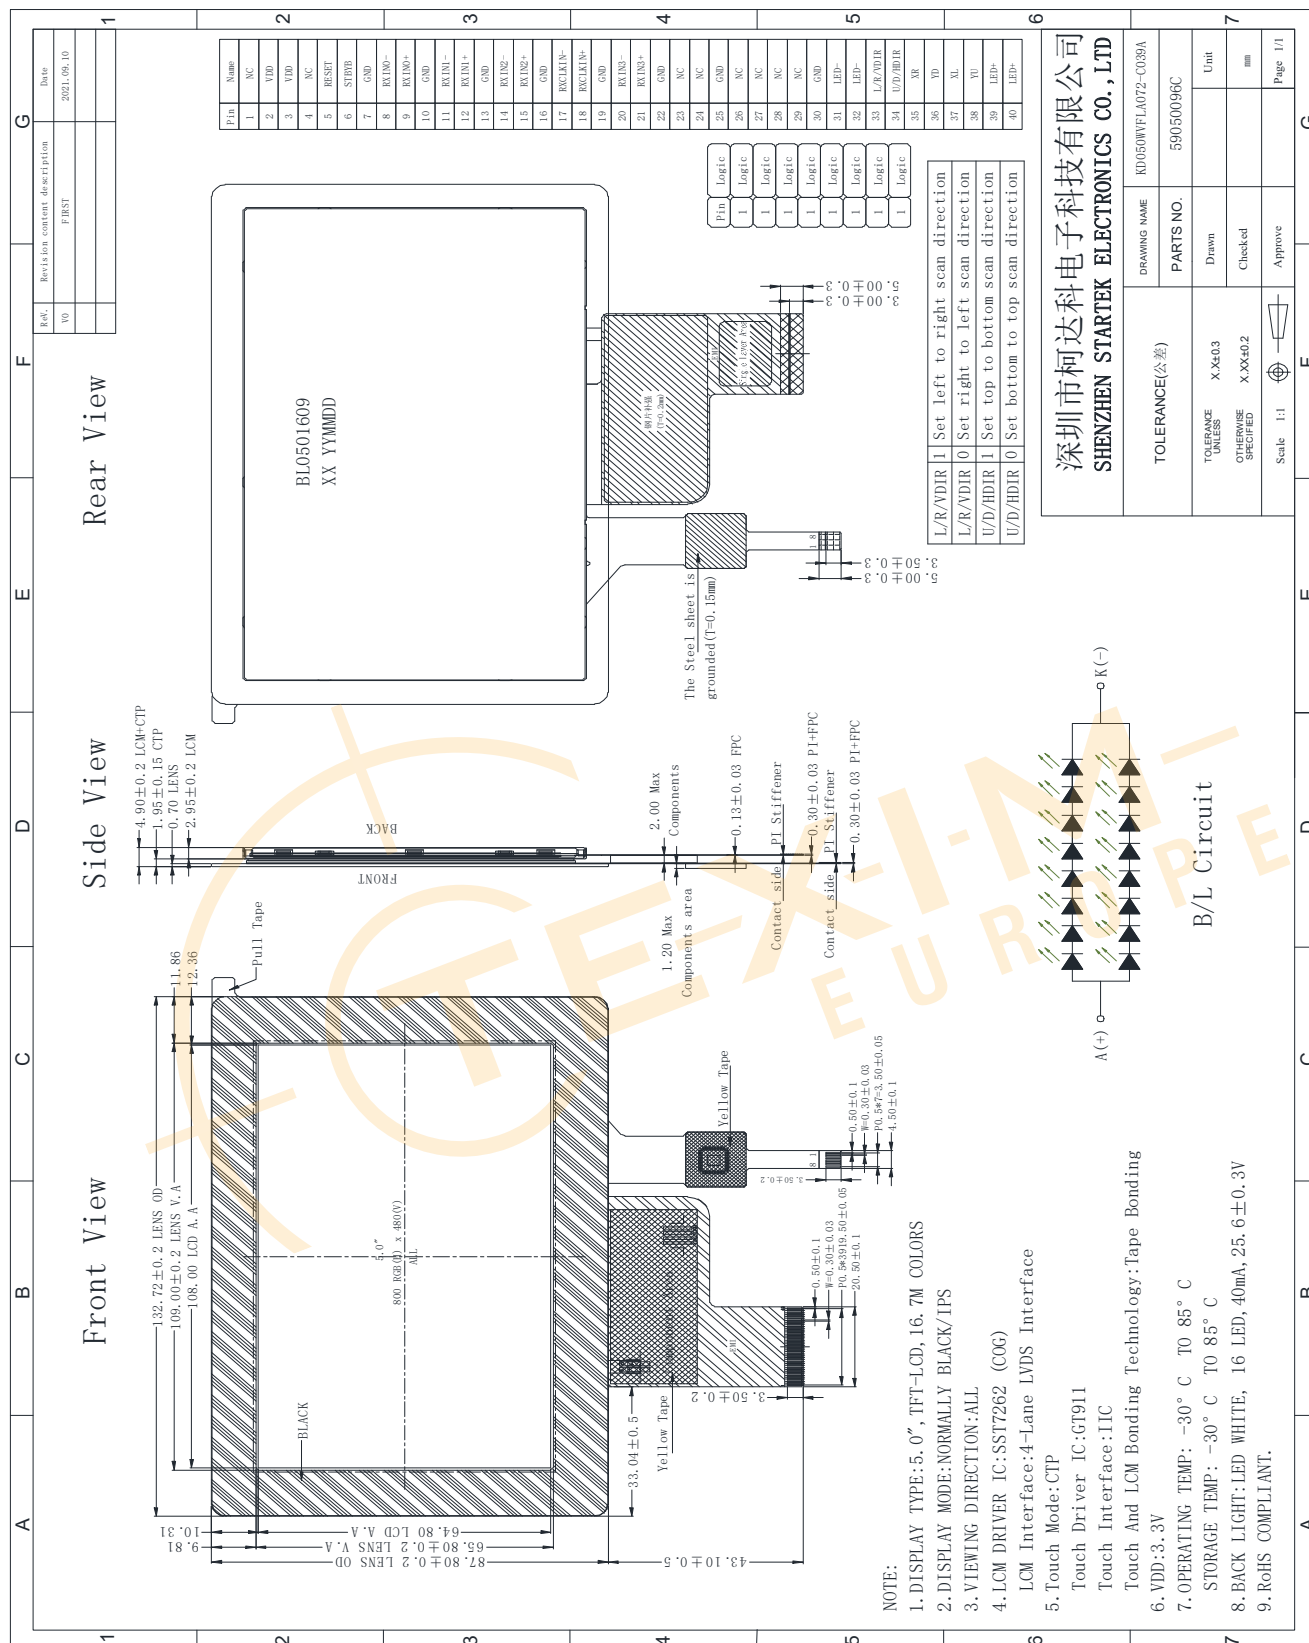

Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 7 of 36
常 备 库 存 Stock For Sale	长 期 供 货 Long Time supply	支持小量 NO MOQ	品 种 齐 全 In Full Range	



4. Input terminal Pin Assignment

4.1 TFT PIN Define

NO.	SYMBOL	DISCRIPTION	I/O
1	NC	--	--
2	VDD	Supply voltage(3.3V).	P
3	VDD	Supply voltage(3.3V).	P
4	NC	--	--
5	RESET	Reset pin. The chip is in reset state when RESETB=0.	I
6	STBYB	Display power control PIN. H: Power ON. L: Power OFF. Internal pull down resistor 100K.	I
7	GND	Ground.	P
8	RXIN0-	- LVDS differential data input	I
9	RXIN0+	+ LVDS differential data input	I
10	GND	Ground.	P
11	RXIN1-	- LVDS differential data input	I
12	RXIN1+	+ LVDS differential data input	I
13	GND	Ground.	P
14	RXIN2-	- LVDS differential data input	I
15	RXIN2+	+ LVDS differential data input	I
16	GND	Ground.	P
17	RXCLKIN-	- LVDS differential clock input	I
18	RXCLKIN+	+ LVDS differential clock input	I
19	GND	Ground.	P
20	RXIN3-	- LVDS differential data input	I
21	RXIN3+	+ LVDS differential data input	I
22	GND	Ground.	P

Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 8 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



23	NC	--	--
24	NC	--	--
25	GND	Ground.	P
26	NC	--	--
27	NC	--	--
28	NC	--	--
29	NC	--	--
30	GND	Ground.	I
31	LED-	LED Cathode	P
32	LED-	LED Cathode	P
33	L/R/VDIR	Horizontal shift direction (source output) selection(NOTE1)	I
34	U/D/HDIR	Vertical shift direction (gate output) selection(NOTE1)	I
35	XR(NC)	Touch panel Right Glass Terminal	A/D
36	YD(NC)	Touch panel Bottom Film Terminal	A/D
37	XL(NC)	Touch panel LIFT Glass Terminal	A/D
38	YU(NC)	Touch panel Top Film Terminal	A/D
39	LED+	LED Anode	P
40	LED+	LED Anode	P

NOTE1

L/R	1	Set left to right scan direction
L/R	0	Set right to left scan direction.
U/D	1	Set top to bottom scan direction
U/D	0	Set bottom to top scan direction

Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 9 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

**4.2 CTP PIN Define**

NO.	SYMBOL	DISCRIPTION	I/O
1	GND	Ground	P
2	VDDIO	Supply voltage for I/O.	P
3	VDD	Supply voltage	P
4	SCL	I2C clock input	I
5	SDA	I2C data input and output	I
6	INT	External interrupt to the host	I
7	RST	External Reset, Low is active	I
8	GND	Ground	P



Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 10 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

5. LCD Optical Characteristics

5.1 Optical specification

Item		Symbol	Condition	Min.	Typ.	Max.	Unit.	Note
Contrast Ratio		CR	$\Theta=0$ Normal viewing angle	800	1200	--		(1)(2)
Response time	Rising	T_R+T_F		--	30	40	msec	(1)(3)
	Falling			--				
Color Gamut		S(%)		42	46	--	%	-
Color Filter Chromaticity	White	W_X		-0.04	0.306	+0.04		CA-310 Test
		W_Y			0.325			
	Red	R_X			0.592			
		R_Y			0.357			
	Green	G_X			0.357			
		G_Y			0.548			
	Blue	B_X			0.148			
		B_Y			0.099			
Viewing angle	Hor.	Θ_L	CR>10	70	80	--		(1)(4)
		Θ_R		70	80	--		
	Ver.	Θ_U		70	80	--		
		Θ_D		70	80	--		
		Option View Direction		ALL				

*The data comes from the LCD specification.

Measuring Condition

Measuring surrounding : dark room

Ambient temperature : $25\pm 2^\circ\text{C}$


15min. warm-up time.

Measuring Equipment

FPM520 of Westar Display technologies, INC., which utilized SR-3 for Chromaticity and BM-5A for other optical characteristics.

Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 11 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	


Note (1): Definition of Viewing Angle :

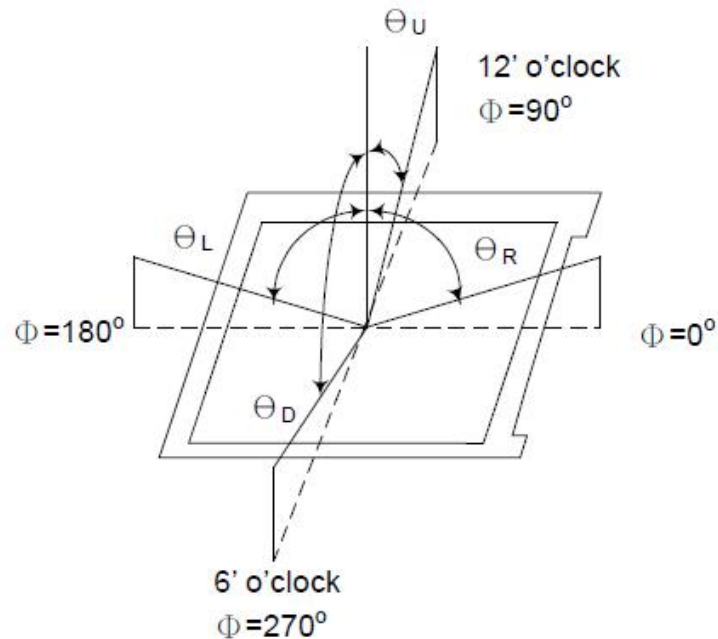

Note (2): Definition of Contrast Ratio(CR) :measured at the center point of panel

$$CR = \frac{\text{Luminance with all pixels white}}{\text{Luminance with all pixels black}}$$


Note (3): Response Time

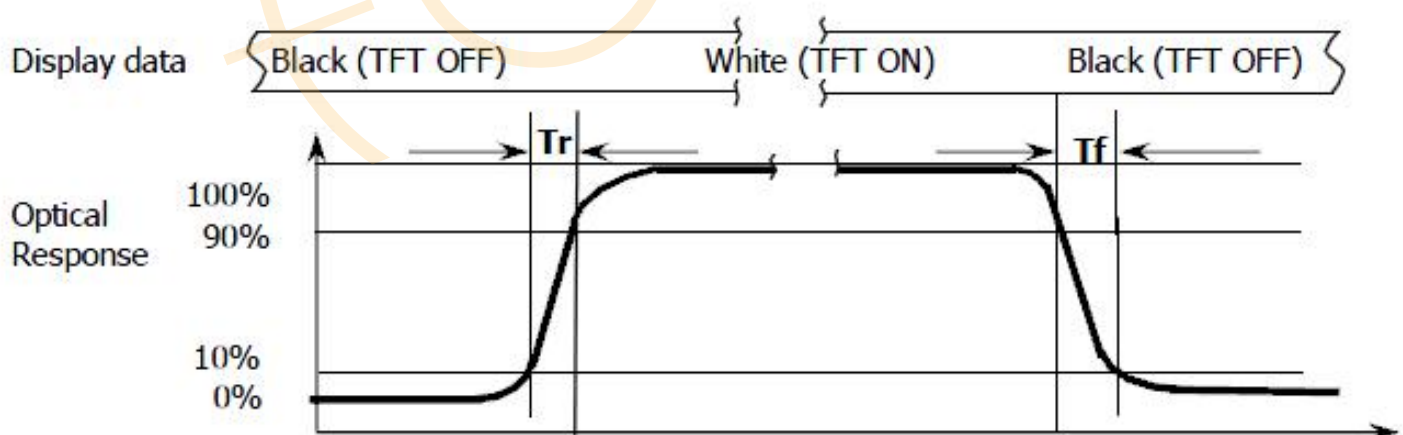

Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 12 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



Note (4): Definition of optical measurement setup

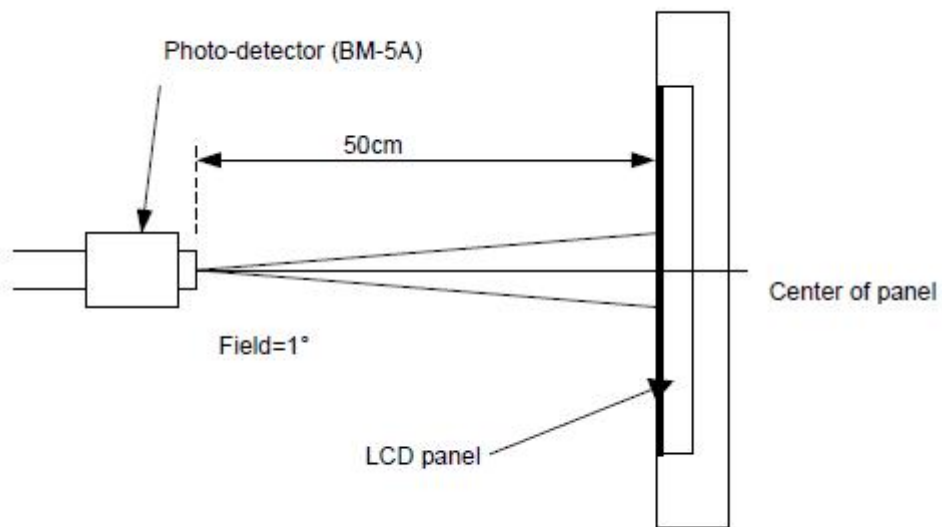

TEXIM-EUROPE

Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 13 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

6. Electrical Characteristics

6.1 Absolute Maximum Rating

Characteristics	Symbol	Min.	Max.	Unit	Note
Digital Supply Voltage	VDD	-0.3	4.0	V	Note1
Operating temperature	T _{OP}	-30	+85	°C	
Storage temperature	T _{ST}	-30	+85	°C	

NOTE1: If the absolute maximum rating of even is one of the above parameters is exceeded even momentarily, the quality of the product may be degraded. Absolute maximum ratings, therefore, specify the values exceeding which the product may be physically damaged. Be sure to use the product within the range of the absolute maximum ratings.

6.2 DC Electrical Characteristics

Characteristics		Symbol	Min.	Typ.	Max.	Unit	Note
LCM Supply Voltage		VDD	3.0	3.3	3.6	V	
LCM Normal mode Current		IDD	--	90	--	mA	
LVDS Interface	Differential Input Hight Threshold Voltage	VLVTH	--	--	100	mV	
	Differential Input Low Threshold Voltage	VLVTL	-100	--	--	mV	
RGB Interface		VIH	2.0	--	VDD	V	
		VIL	GND	--	0.8	V	

6.3 LED Backlight Characteristics

The back-light system is edge-lighting type with 16 chips LED


Item	Symbol	Min.	Typ.	Max.	Unit	Note
Forward Current	I_F	30	40	--	mA	
Forward Voltage	V_F	--	25.6	--	V	
LCM Luminance	LV	700	750	--	cd/m ²	Note3
LED life time	Hr	--	50000	--	Hour	Note1,2
Uniformity	Avg	80	--	--	%	Note3

Note1: LED life time (Hr) can be defined as the time in which it continues to operate under the condition:

$T_a = 25 \pm 3^\circ \text{C}$, typical IL value indicated in the above table until the brightness becomes less than 50%.

Note 2: The "LED life time" is defined as the module brightness decrease to 50% original brightness at

$T_a = 25^\circ \text{C}$ and $I_L = 40 \text{mA}$. The LED lifetime could be decreased if operating I_L is larger than 40mA. The constant current driving method is suggested.

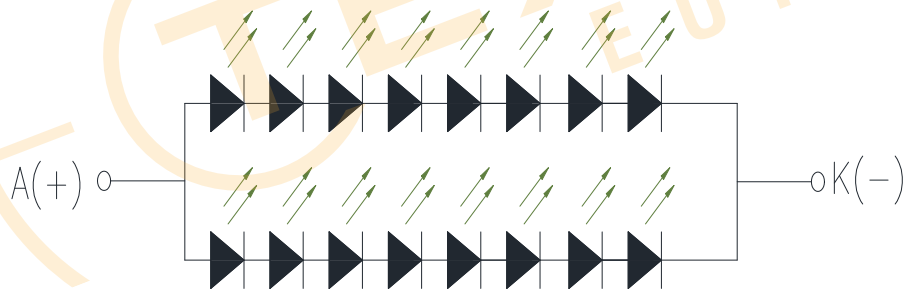


B/L Circuit

Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 15 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



Note (3) Luminance Uniformity of these 9 points is defined as below:

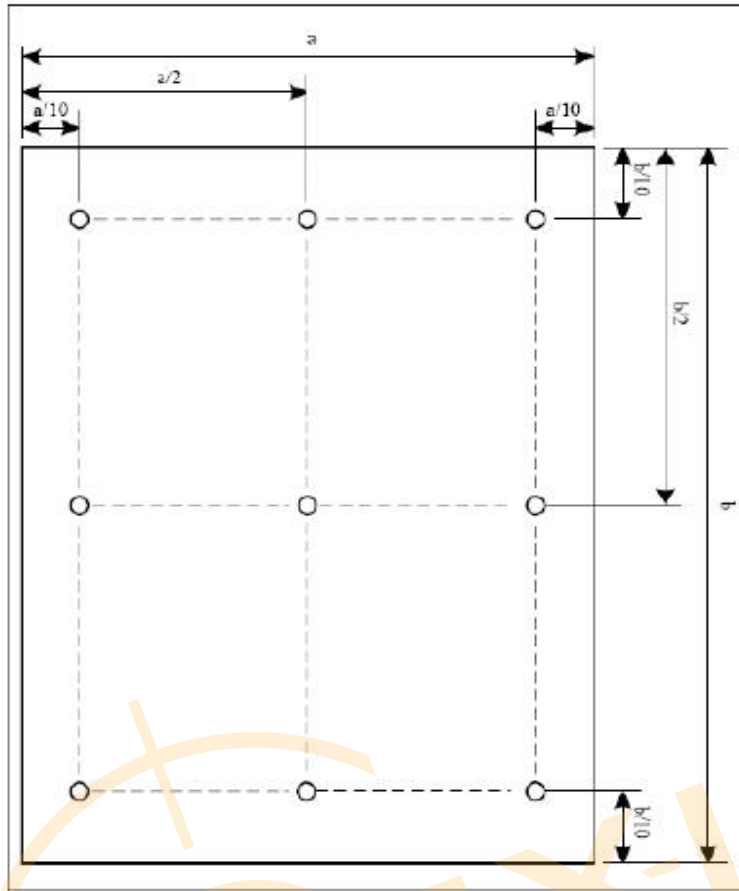

$$\text{Uniformity} = \frac{\text{minimum luminance in 9 points (1-9)}}{\text{maximum luminance in 9 points (1-9)}}$$


$$\text{Luminance} = \frac{\text{Total Luminance of 9 points}}{9}$$

Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 16 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

7. LVDS Signal Timing Characteristics

7.1 AC Electrical Characteristics

Item	Symbol	Min.	Typ.	Max.	Unit	Note
LVDS Differential input high Threshold voltage	RxVTH	--	--	+100	mV	RXVCM=1.2V
LVDS Differential input low Threshold voltage	RxVTL	-100	--	--	mV	
LVDS Differential input common mode voltage	RxVCM	0.7	--	1.6	V	
LVDDS Differential voltage	VID	200	--	600	mV	

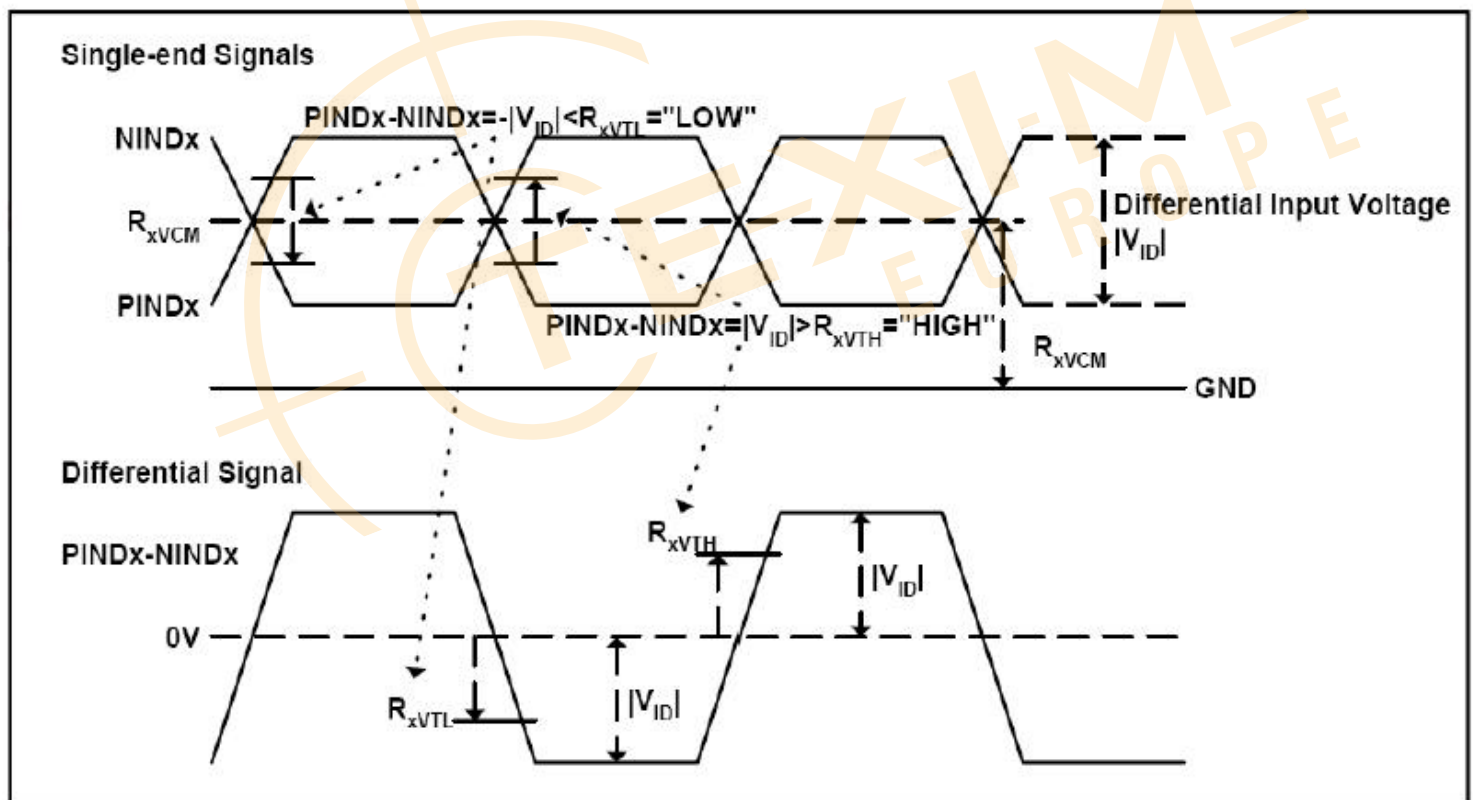


Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 17 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



7.2 Timing Table

Parallel 24-bit RGB Interface Timing Table						
Item	Symbol	Min.	Typ.	Max.	Unit	Remark
DCLK Frequency	Fclk	23	25	27	MHz	
HSYNC	Period Time	Th	808	816	896	DCLK
	Display Period	Thdisp	800		DCLK	
	Back Porch	Thbp	4	8	48	DCLK
	Front Porch	Thfp	4	8	48	DCLK
	Pulse Width	Thw	2	4	8	DCLK
VSYNC	Period Time	Tv	488	496	504	HSYNC
	Display Period	Tvdisp	480		HSYNC	
	Back Porch	Tvbp	4	8	12	HSYNC
	Front Porch	Tvfp	4	8	12	HSYNC
	Pulse Width	Tvw	2	4	8	HSYNC

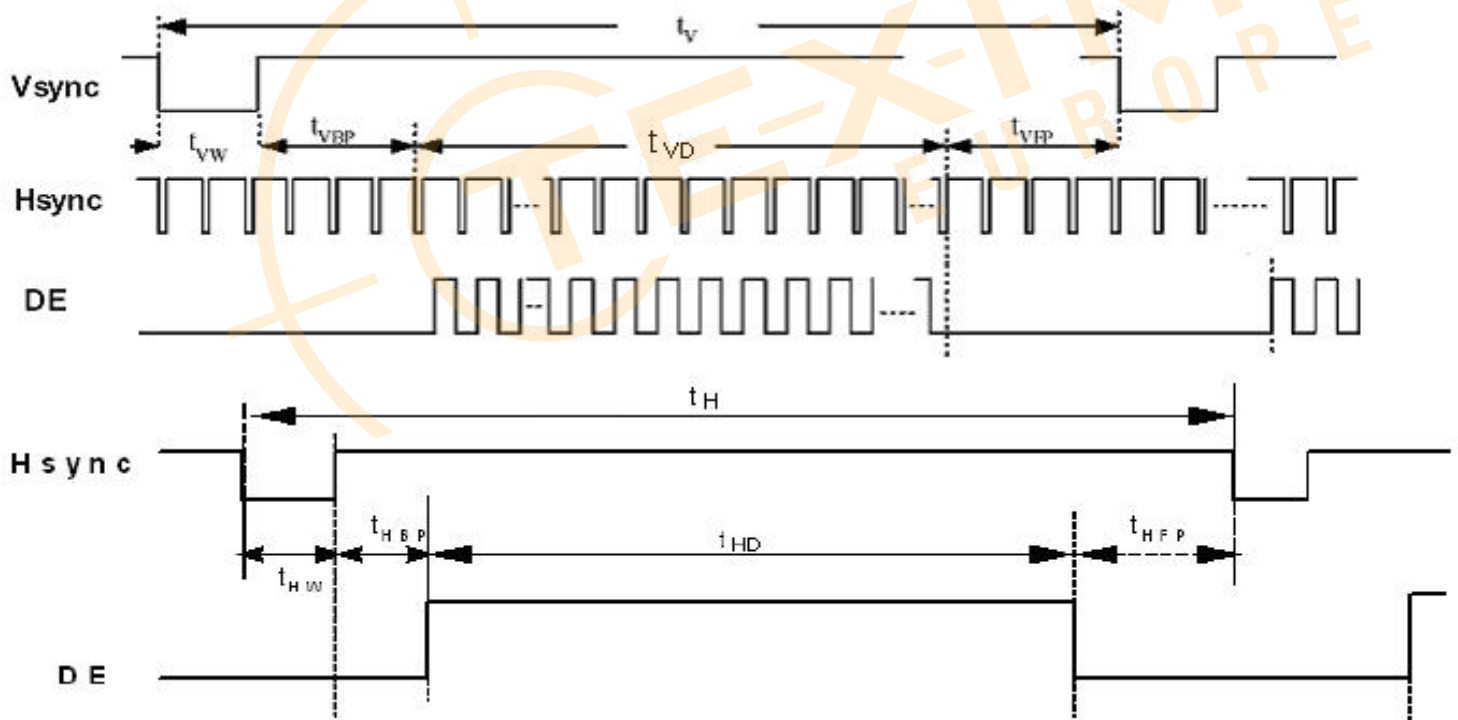

Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 18 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 19 of 36
常 备 库 存 Stock For Sale	长 期 供 货 Long Time supply	支持小量 NO MOQ	品 种 齐 全 In Full Range	



8. CTP Specification

8.1 Electrical Characteristics

8.1.1 Absolute Maximum Rating

Item	Symbol	Min.	Max.	Unit	Note
Power Supply Voltage	VDD	2.66	3.47	V	
Operating temperature	T _{OP}	-30	+85	°C	
Storage temperature	T _{ST}	-30	+85	°C	

8.1.2 DC Electrical Characteristics (Ta=25°C)

(Ambient temperature:25°C, VDD=2.8V, VDDIO=1.8V or VDDIO=VDD)

Item	Min.	Typ.	Max.	Unit	Note
Power Supply Voltage/VDD	2.66	3.3	3.47	V	
Normal mode operating current	--	8	14.5	mA	
Green mode operating current	--	3.3	--	mA	
Sleep mode operating current	70	--	120	uA	
Doze mode operating current	--	0.78	--	mA	
Digital Input low voltage/VIL	-0.3	--	0.25*VDD	V	
Digital Input high voltage/VIH	0.75*VDD	--	VDD+0.3	V	
Digital Output low voltage/VOL	--	--	0.15*VDD	V	
Digital Output high voltage/VOH	0.85*VDD	--	--	V	

Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 20 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	


8.1.3 AC Characteristics

(Ambient temperature:25°C, VDD=2.8V, VDDIO=1.8V)

Parameter	Min	Typ	Max	Unit	Note
OSC oscillation frequency	59	60	61	MHZ	
I/O output rise time,low to high	-	14	-	ns	
I/O output rfall time,high to low	-	14	-	ns	

8.2 I2C Timing

GT911 provides a standard I2C interface for SCL and SDA to communicate with the host. GT911 always serves as slave device in the system with all communication being initialized by the host. It is strongly recommended that transmission rate be kept at or below 400Kbps. The I2C timing is shown below:

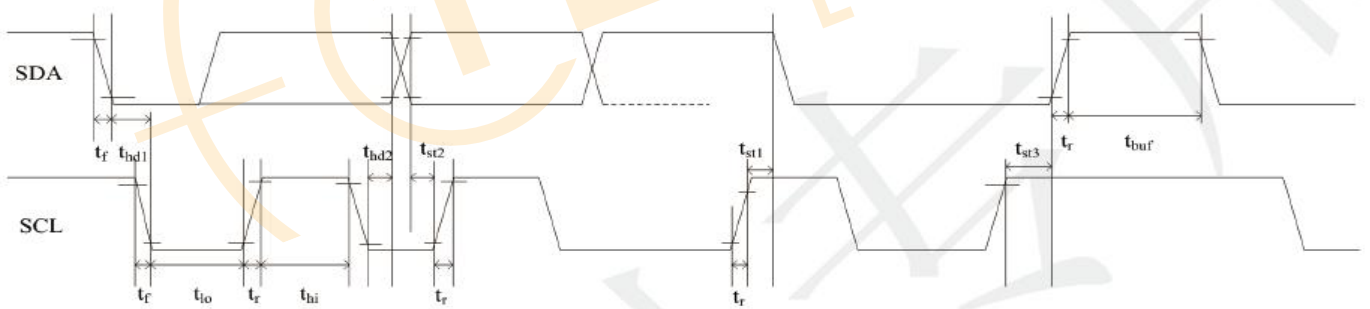

Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 21 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



Test condition 1: 1.8V host interface voltage, 400Kbps transmission rate, 2K pull-up resistor


Parameter	Symbol	Min.	Max.	Unit
SCL low period	t_{lo}	1.3	-	us
SCL high period	t_{hi}	0.6	-	us
SCL setup time for Start condition	t_{st1}	0.6	-	us
SCL setup time for Stop condition	t_{st3}	0.6	-	us
SCL hold time for Start condition	t_{hd1}	0.6	-	us
SDA setup time	t_{st2}	0.1	-	us
SDA hold time	t_{hd2}	0	-	us

Test condition 2: 3.3V host interface voltage, 400Kbps transmission rate, 2K pull-up resistor

Parameter	Symbol	Min.	Max.	Unit
SCL low period	t_{lo}	1.3	-	us
SCL high period	t_{hi}	0.6	-	us
SCL setup time for Start condition	t_{st1}	0.6	-	us
SCL setup time for Stop condition	t_{st3}	0.6	-	us
SCL hold time for Start condition	t_{hd1}	0.6	-	us
SDA setup time	t_{st2}	0.1	-	us
SDA hold time	t_{hd2}	0	-	us

GT911 supports two I2C slave addresses: 0xBA/0xBB and 0x28/0x29. The host can select the address by changing the status of Reset and INT pins during the power-on initialization phase. See the diagram below for configuration methods and timings:


Power-on Timing:

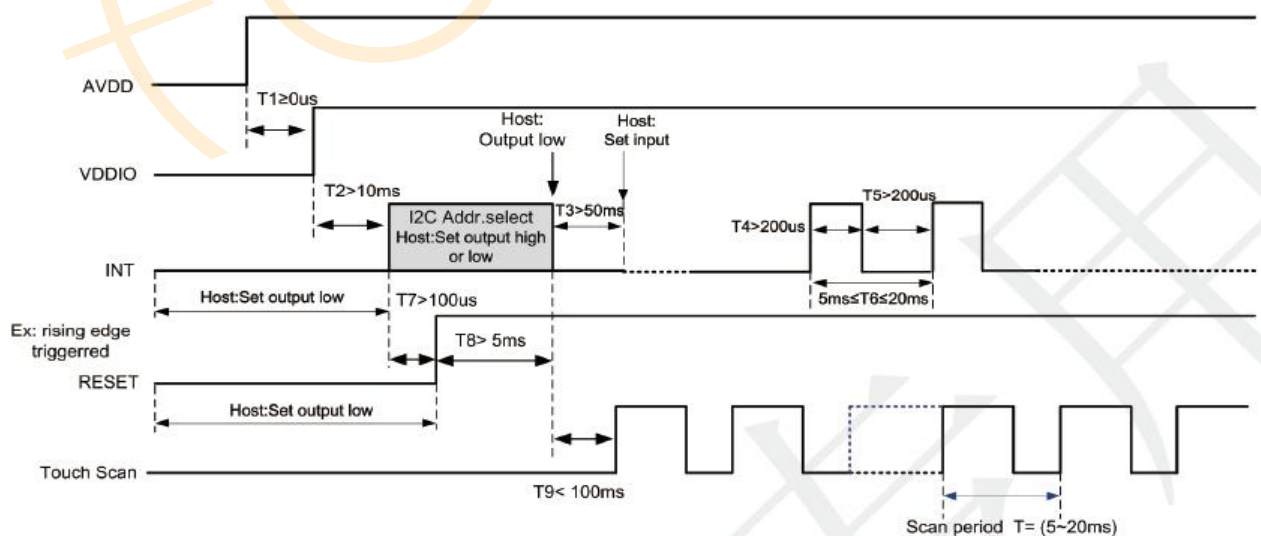


Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 22 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

SHENZHEN **STARTEK** ELECTRONIC TECHNOLOGY CO., LTD


Timing for host resetting GT911:

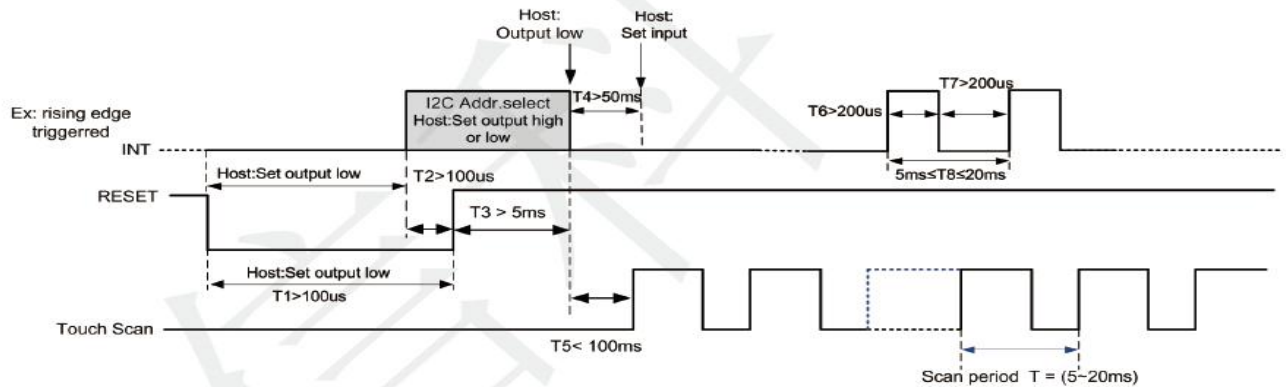

Timing for setting slave address to 0x28/0x29:

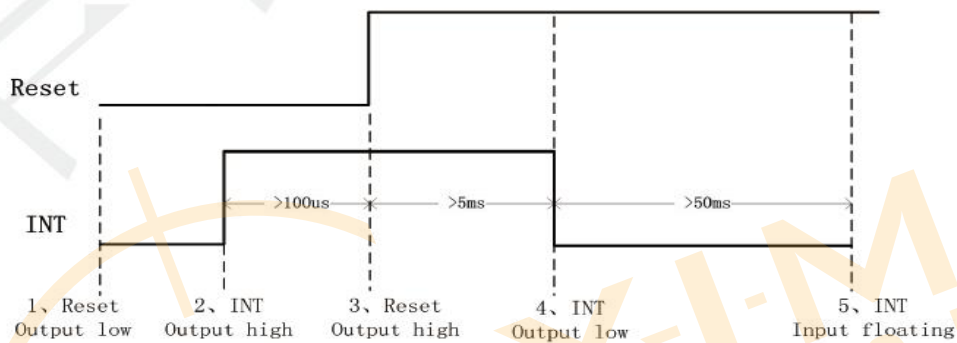

Timing for setting slave address to 0xBA/0xBB:

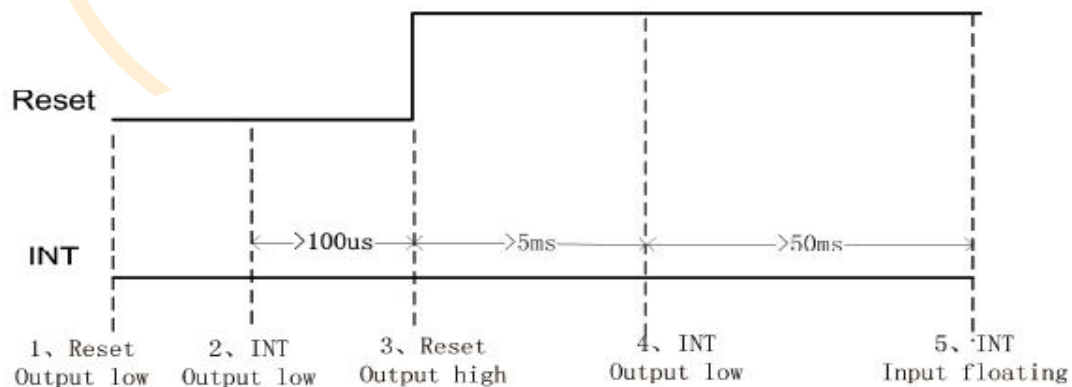



a) Data Transmission

(For example: device address is 0xBA/0xBB)

Communication is always initiated by the host. Valid Start condition is signaled by pulling SDA line from “high” to “low” when SCL line is “high”. Data flow or address is transmitted after the Start condition.

All slave devices connected to I²C bus should detect the 8-bit address issued after Start condition and send the correct ACK. After receiving matching address, GT911 acknowledges by configuring SDA line as output port and pulling SDA line low during the ninth SCL cycle. When receiving unmatched address, namely, not 0xBA or 0xBB, GT911 will stay in an idle state.

For data bytes on SDA, each of 9 serial bits will be sent on nine SCL cycles. Each data byte consists of 8 valid data bits and one ACK or NACK bit sent by the recipient. The data transmission is valid when SCL line is “high”.

When communication is completed, the host will issue the STOP condition. Stop condition implies the transition of SDA line from “low” to “high” when SCL line is “high”.

b) Writing Data to GT911

(For example: device address is 0xBA/0xBB)



Timing for Write Operation

The diagram above displays the timing sequence of the host writing data onto GT911. First, the host issues a Start condition. Then, the host sends 0xBA (address bits and R/W bit; R/W bit as 0 indicates Write operation) to the slave device.

After receiving ACK, the host sends the 16-bit register address (where writing starts) and the 8-bit data bytes (to be written onto the register).

The location of the register address pointer will automatically add 1 after every Write Operation. Therefore, when the host needs to perform Write Operations on a group of registers of continuous addresses, it is able to write continuously. The Write Operation is terminated when the host issues the Stop condition.

Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 24 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

**c) Reading Data from GT911**

(For example: device address is 0xBA/0xBB)

**Timing for Read Operation**

The diagram above is the timing sequence of the host reading data from GT911. First, the host issues a Start condition and sends 0xBA (address bits and R/W bit; R/W bit as 0 indicates Write operation) to the slave device.

After receiving ACK, the host sends the 16-bit register address (where reading starts) to the slave device. Then the host sets register addresses which need to be read.

Also after receiving ACK, the host issues the Start condition once again and sends 0xBB (Read Operation). After receiving ACK, the host starts to read data.

GT911 also supports continuous Read Operation and, by default, reads data continuously. Whenever receiving a byte of data, the host sends an ACK signal indicating successful reception. After receiving the last byte of data, the host sends a NACK signal followed by a STOP condition which terminates communication.

Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 25 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

9. LCD Module Out-Going Quality Level

9.1 VISUAL & FUNCTION INSPECTION STANDARD

9.1.1 Inspection conditions

Inspection performed under the following conditions is recommended.


Temperature : $25\pm 5^{\circ}\text{C}$

Humidity : $65\%\pm 10\%\text{RH}$


Viewing Angle : Normal viewing Angle.

Illumination: Single fluorescent lamp (300 to 700Lux)

Viewing distance:30-50cm

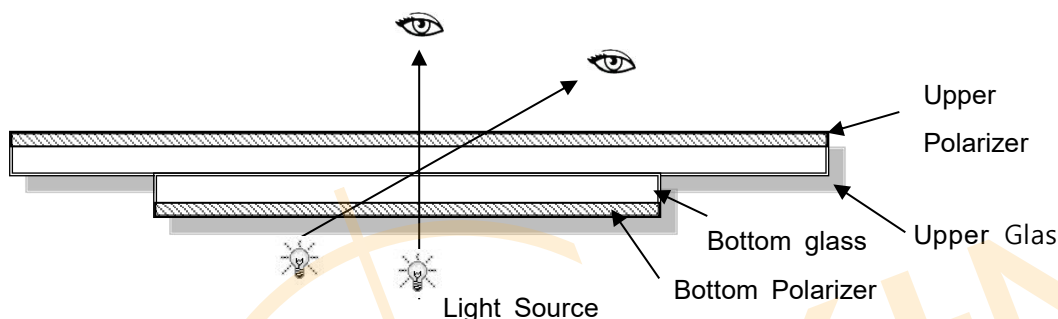

9.1.2 Definition

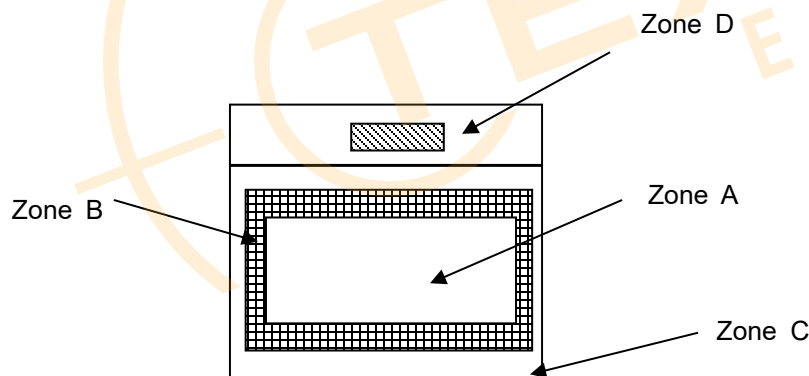

Zone A : Effective Viewing Area(Character or Digit can be seen)

Zone B : Viewing Area except Zone A

Zone C : Outside (Zone A+Zone B) which can not be seen after assembly by customer .)

Zone D : IC Bonding Area

Note:As a general rule ,visual defects in Zone C can be ignored when it doesn't effect product function or appearance after assembly by customer

Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 26 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

9.1.3 Sampling Plan

According to GB/T 2828-2003 ; , normal inspection, Class II

AQL:

Major defect	Minor defect
0.65	1.5

LCD: Liquid Crystal Display , LCM: Liquid Crystal Module, CTP: Capacitive Touch Panel

No	Items to be inspected	Criteria	Classification of defects
1	Functional defects	1) No display, Open or miss line 2) Display abnormally, Short 3) Backlight no lighting, abnormal lighting. etc	Major
2	Missing	Missing components and etc	
3	Outline dimension	Overall outline dimension beyond the drawing is not allowed, deformation and etc	
4	Color tone	Color unevenness, refer to limited sample	Minor
5	Spot/Line defect	Light dot, Dim spot, (Note1) Polarizer Air Bubble, Polarizer accidented spot and etc	
6	Soldering appearance	Good soldering , Peeling off is not allowed and etc	
7	LCD/Polarizer/CTP	Black/White spot/line, scratch, crack, etc.	




Note1: a) Light dot: Dots appear bright and unchanged in size in which LCD panel is displaying under black pattern.

b) Dim dot: Dots appear dark and unchanged in size in which LCD panel is displaying under pure red, green, blue picture.

Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 27 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



9.1.4 Criteria (Visual)

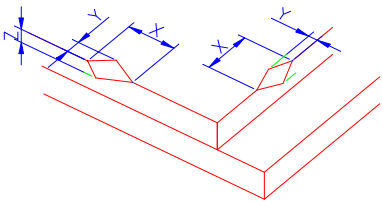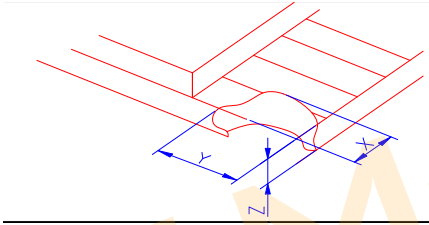Number	Items	Criteria(mm)						
1.0 LCD Crack/Broken NOTE: X: Length Y: Width Z: Height L: Length of IT O, T: Height of LCD	(1) The edge of LCD broken	 <table><tr><td>X</td><td>Y</td><td>Z</td></tr><tr><td>≤3.0mm</td><td><Inner border line of the seal</td><td>≤T</td></tr></table>	X	Y	Z	≤3.0mm	<Inner border line of the seal	≤T
	X	Y	Z					
	≤3.0mm	<Inner border line of the seal	≤T					
(2)LCD corner broken	 <table><tr><td>X</td><td>Y</td><td>Z</td></tr><tr><td>≤3.0mm</td><td>≤L</td><td>≤T</td></tr></table>	X	Y	Z	≤3.0mm	≤L	≤T	
X	Y	Z						
≤3.0mm	≤L	≤T						
(3) LCD crack	 Crack Not allowed							



Spot defect

$\Phi=(X+Y)/2$

2.0

① light dot (black/white spot , pinhole, stain, etc.)

Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi \leq 0.15$	Ignore	Ignore	
$0.15 < \Phi \leq 0.25$	3(distance $\geq 10\text{mm}$)		
$0.25 < \Phi \leq 0.4$	2(distance $\geq 10\text{mm}$)		
$\Phi > 0.4$	0		

② Dim spot (light leakage、dent、dark spot, etc)

Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi \leq 0.15$	Ignore	Ignore	
$0.15 < \Phi \leq 0.25$	3(distance $\geq 10\text{mm}$)		
$0.25 < \Phi \leq 0.4$	2(distance $\geq 10\text{mm}$)		
$\Phi > 0.4$	0		



③ Polarizer accidented spot

Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi \leq 0.2$	Ignore	Ignore	
$0.2 < \Phi \leq 0.5$	2(distance $\geq 10\text{mm}$)		
$\Phi > 0.5$	0		

④Polarizer Bubble

Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi \leq 0.2$	Ignore	Ignore	
$0.2 < \Phi \leq 0.4$	2(distance $\geq 10\text{mm}$)		
$\Phi > 0.4$	0		



3.0	LCD Pixel defect	Pixel bad points																							
		<table> <tr> <th>Item</th><th>Zone A</th><th>Acceptable Qt</th></tr> <tr> <td rowspan="3">Bright dot</td><td>Random</td><td>$N \leq 2$</td></tr> <tr> <td>2 dots adjacent</td><td>$N \leq 0$</td></tr> <tr> <td>3 dots adjacent</td><td>$N \leq 0$</td></tr> <tr> <td rowspan="3">Dark dot</td><td>Random</td><td>$N \leq 3$</td></tr> <tr> <td>2 dots adjacent</td><td>$N \leq 0$</td></tr> <tr> <td>3 dots adjacent</td><td>$N \leq 0$</td></tr> <tr> <td>Distance</td><td> 1. Minimum Distance Between Bright dots. 2. Minimum Distance Between dark dots 3. Minimum Distance Between dark and bright dot. </td><td>5mm</td></tr> <tr> <td colspan="2">Total bright and dark dot</td><td>$N \leq 4$</td></tr> </table>	Item	Zone A	Acceptable Qt	Bright dot	Random	$N \leq 2$	2 dots adjacent	$N \leq 0$	3 dots adjacent	$N \leq 0$	Dark dot	Random	$N \leq 3$	2 dots adjacent	$N \leq 0$	3 dots adjacent	$N \leq 0$	Distance	1. Minimum Distance Between Bright dots. 2. Minimum Distance Between dark dots 3. Minimum Distance Between dark and bright dot.	5mm	Total bright and dark dot		$N \leq 4$
Item	Zone A	Acceptable Qt																							
Bright dot	Random	$N \leq 2$																							
	2 dots adjacent	$N \leq 0$																							
	3 dots adjacent	$N \leq 0$																							
Dark dot	Random	$N \leq 3$																							
	2 dots adjacent	$N \leq 0$																							
	3 dots adjacent	$N \leq 0$																							
Distance	1. Minimum Distance Between Bright dots. 2. Minimum Distance Between dark dots 3. Minimum Distance Between dark and bright dot.	5mm																							
Total bright and dark dot		$N \leq 4$																							
		Note: A) Bright dot: Dots appear bright and unchanged in size in which LCD panel is displaying under black pattern. B) Dark dot: Dots appear dark and unchanged in size in which LCD panel is displaying under pure red, green, blue picture. C) 2 dot adjacent = 1 pair = 2 dots Picture:  2 dot adjacent  2 dot adjacent  2 dot adjacent (vertical)  2 dot adjacent (slant)																							



4.0	Line defect (LCD /Polarizer backlight black/white line, scratch, stain)  W: width, L : length N : Count	Width(mm)	Length(m)	Acceptable Qty		
				A	B	C
		$\Phi \leq 0.05$	Ignore	Ignore		Ignore
		$0.05 < W \leq 0.06$	$L \leq 5.0$	$N \leq 3$		
		$0.06 < W \leq 0.08$	$L \leq 4.0$	$N \leq 2$		
$W > 0.08$		Define as spot defect				
5.0	Electronic Components SMT.	Not allow missing parts, solderless connection, cold solder joint, mismatch, The positive and negative polarity opposite				
6.0	Display color& Brightness.	1. Color: Measuring the color coordinates, The measurement standard according to the datasheet or samples. 2. Brightness: Measuring the brightness of White screen, The measurement standard according to the datasheet or Samples.				
7.0	LCD Mura/Waving/Hot spot	Not visible through 5% ND filter in 50% gray or judge by limit sample if necessary.				

8.0	CTP Related	CTP Cover sensor accidented black/white spot	Size Φ (mm)	Acceptable Qty	
				A	B
			$\Phi \leq 0.15$	Ignore	
			$0.15 < \Phi \leq 0.25$	$N \leq 10$	
			$0.25 < \Phi \leq 0.35$	$N \leq 5$	
			$\Phi > 0.35$	0	



		CTP Cover	<table><tr><td>Width(mm)</td><td>Ignore (mm)</td><td colspan="3">Acceptable Qty</td></tr><tr><td></td><td></td><td>A</td><td>B</td><td>C</td></tr><tr><td>$\Phi \leq 0.05$</td><td>Ignore</td><td colspan="3">Ignore</td></tr><tr><td>$0.05 < W \leq 0.06$</td><td>$L \leq 4.0$</td><td colspan="3">$N \leq 3$</td></tr><tr><td>$0.06 < W \leq 0.08$</td><td>$L \leq 3.0$</td><td colspan="3">$N \leq 2$</td></tr><tr><td>$0.08 < W$</td><td colspan="4">Define as spot defect</td></tr></table>	Width(mm)	Ignore (mm)	Acceptable Qty					A	B	C	$\Phi \leq 0.05$	Ignore	Ignore			$0.05 < W \leq 0.06$	$L \leq 4.0$	$N \leq 3$			$0.06 < W \leq 0.08$	$L \leq 3.0$	$N \leq 2$			$0.08 < W$	Define as spot defect			
Width(mm)	Ignore (mm)	Acceptable Qty																															
		A	B	C																													
$\Phi \leq 0.05$	Ignore	Ignore																															
$0.05 < W \leq 0.06$	$L \leq 4.0$	$N \leq 3$																															
$0.06 < W \leq 0.08$	$L \leq 3.0$	$N \leq 2$																															
$0.08 < W$	Define as spot defect																																
		CTP Cover Pinhole/ Lack of ink	<table><tr><td rowspan="2"> Zone Size (mm) </td><td>Acceptable Qty</td></tr><tr><td>C</td></tr><tr><td>$\Phi \leq 0.2$</td><td>Ignore</td></tr><tr><td>$0.2 < \Phi \leq 0.3$</td><td>4(distance $\geq 10\text{mm}$)</td></tr><tr><td>$0.3 < \Phi \leq 0.4$</td><td>2(distance $\geq 10\text{mm}$)</td></tr><tr><td>$\Phi > 0.4$</td><td>0</td></tr></table>	Zone Size (mm)	Acceptable Qty	C	$\Phi \leq 0.2$	Ignore	$0.2 < \Phi \leq 0.3$	4(distance $\geq 10\text{mm}$)	$0.3 < \Phi \leq 0.4$	2(distance $\geq 10\text{mm}$)	$\Phi > 0.4$	0																			
Zone Size (mm)	Acceptable Qty																																
	C																																
$\Phi \leq 0.2$	Ignore																																
$0.2 < \Phi \leq 0.3$	4(distance $\geq 10\text{mm}$)																																
$0.3 < \Phi \leq 0.4$	2(distance $\geq 10\text{mm}$)																																
$\Phi > 0.4$	0																																
		CTP Bonding bubble/ accidented spot	<table><tr><td rowspan="2">Size $\Phi(\text{mm})$</td><td colspan="2">Acceptable Qty</td></tr><tr><td>A</td><td>B</td></tr><tr><td>$\Phi \leq 0.1$</td><td colspan="2">Ignore</td></tr><tr><td>$0.1 < \Phi \leq 0.2$</td><td colspan="2">4(distance $\geq 10\text{mm}$)</td></tr><tr><td>$0.2 < \Phi \leq 0.3$</td><td colspan="2">2(distance $\geq 10\text{mm}$)</td></tr><tr><td>$\Phi > 0.3$</td><td colspan="2">0</td></tr></table>	Size $\Phi(\text{mm})$	Acceptable Qty		A	B	$\Phi \leq 0.1$	Ignore		$0.1 < \Phi \leq 0.2$	4(distance $\geq 10\text{mm}$)		$0.2 < \Phi \leq 0.3$	2(distance $\geq 10\text{mm}$)		$\Phi > 0.3$	0														
Size $\Phi(\text{mm})$	Acceptable Qty																																
	A	B																															
$\Phi \leq 0.1$	Ignore																																
$0.1 < \Phi \leq 0.2$	4(distance $\geq 10\text{mm}$)																																
$0.2 < \Phi \leq 0.3$	2(distance $\geq 10\text{mm}$)																																
$\Phi > 0.3$	0																																
		Assembly deflection	beyond the edge of backlight $\leq 0.2\text{mm}$																														
		CTP cover broken	<table><tr><td>X</td><td>Y</td><td>Z</td></tr><tr><td>$X \leq 0.5\text{mm}$</td><td>$Y \leq 0.5\text{mm}$</td><td>$Z < \text{cover t hickness}$</td></tr></table> * Circuitry broken is not allowed.	X	Y	Z	$X \leq 0.5\text{mm}$	$Y \leq 0.5\text{mm}$	$Z < \text{cover t hickness}$																								
X	Y	Z																															
$X \leq 0.5\text{mm}$	$Y \leq 0.5\text{mm}$	$Z < \text{cover t hickness}$																															
		X : length																															
		Y : width																															
		Z : height																															

*

Circuitry broken is not allowed.

Part. No

KD050WVFLA072-C039A


REV

V1.0

Page 32 of 36

常备库存
Stock For Sale长期供货
Long Time supply支持小量
NO MOQ品种齐全
In Full Range

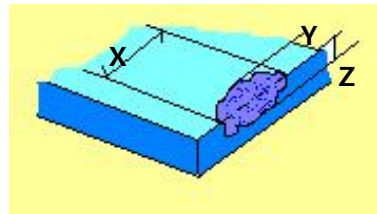

		CTP cover broken	<table><tr><td>X</td><td>Y</td><td>Z</td></tr><tr><td>$X \leq 0.3\text{mm}$</td><td>$Y \leq 0.3\text{mm}$</td><td>$Z < \text{cover thickness}$</td></tr></table>	X	Y	Z	$X \leq 0.3\text{mm}$	$Y \leq 0.3\text{mm}$	$Z < \text{cover thickness}$	
X	Y	Z								
$X \leq 0.3\text{mm}$	$Y \leq 0.3\text{mm}$	$Z < \text{cover thickness}$								
	X : length	* Circuitry broken is not allowed.								
	Y : width									
	Z : height									

Criteria (functional items)

Number	Items	Criteria (mm)
1	No display	Not allowed
2	Missing segment	Not allowed
3	Short	Not allowed
4	Backlight no lighting	Not allowed
5	CTP no function	Not allowed

TEXIM-EUROPE

Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 33 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

10. Reliability Test Result

Item	Condition	Inspection after test
High Temperature Operating	85°C,96HR	Inspection after 2~4hours storage at room temperature, the sample shall be free from defects: 1.Air bubble in the LCD; 2.Non-display; 3.Missing segments/line; 4.Glass crack; 5.Current IDD is twice higher than initial value.
Low Temperature Operating	-30°C, 96HR	
High Temperature Storage	85°C, 96HR	
Low Temperature Storage	-30°C, 96HR	
High Temperature & High Humidity Operating	+60°C, 90% RH ,96 hours.	
Thermal Shock (Non-operation)	-20°C,30 min ↔ 70°C,30 min, Change time:5min 20CYC.	
ESD test	C=150pF, R=330,5points/panel Air:±8KV, 5times; Contact:±6KV, 5 times; (Environment: 15°C~35°C, 30%~60%).	
Vibration (Non-operation)	Frequency range:10~55Hz, Stroke:1.5mm Sweep:10Hz~55Hz~10Hz 2 hours for each direction of X.Y.Z. (6 hours for total) (Package condition).	
Box Drop Test	1 Corner 3 Edges 6 faces,80cm(MEDIUM BOX)	

Remark:

- 1.The test samples should be applied to only one test item.
- 2.Sample size for each test item is 5~10pcs.
- 3.For Damp Proof Test, Pure water(Resistance > 10MΩ) should be used.
- 4.In case of malfunction defect caused by ESD damage, if it would be recovered to normal state after resetting, it would be judged as a good part.
- 5.Failure Judgment Criterion: Basic Specification, Electrical Characteristic, Mechanical Characteristic, Optical Characteristic.
6. The color fading mura of polarizing filter should not care.

Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 34 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

11. Cautions and Handling Precautions

11.1 Handling and Operating the Module

(1) When the module is assembled, it should be attached to the system firmly.

Do not warp or twist the module during assembly work.

(2) Protect the module from physical shock or any force. In addition to damage, this may cause improper operation or damage to the module and back-light unit.

(3) Note that polarizer is very fragile and could be easily damaged. Do not press or scratch the surface.

(4) Do not allow drops of water or chemicals to remain on the display surface.

If you have the droplets for a long time, staining and discoloration may occur.

(5) If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.

(6) The desirable cleaners are water, IPA (Isopropyl Alcohol) or Hexane.

Do not use ketene type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.

(7) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, legs, or clothes, it must be washed away thoroughly with soap.

(8) Protect the module from static; it may cause damage to the CMOS ICs.

(9) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.

(10) Do not disassemble the module.

(11) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.

(12) Pins of I/F connector shall not be touched directly with bare hands.

(13) Do not connect, disconnect the module in the "Power ON" condition.

(14) Power supply should always be turned on/off by the item 6.1 Power On Sequence & 6.2 Power Off Sequence

11.2 Storage and Transportation.

(1) Do not leave the panel in high temperature, and high humidity for a long time.

It is highly recommended to store the module with temperature from 0 to 35 °C and relative humidity of less than 70%

(2) Do not store the TFT-LCD module in direct sunlight.

(3) The module shall be stored in a dark place. When storing the modules for a long time, be sure to adopt effective measures for protecting the modules from strong ultraviolet radiation, sunlight, or fluorescent light.

(4) It is recommended that the modules should be stored under a condition where no condensation is allowed. Formation of dewdrops may cause an abnormal operation or a failure of the module.

In particular, the greatest possible care should be taken to prevent any module from being operated where condensation has occurred inside.

(5) This panel has its circuitry FPC on the bottom side and should be handled carefully in order not to be stressed.

Part. No	KD050WVFLA072-C039A	REV	V1.0	Page 35 of 36
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.


It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

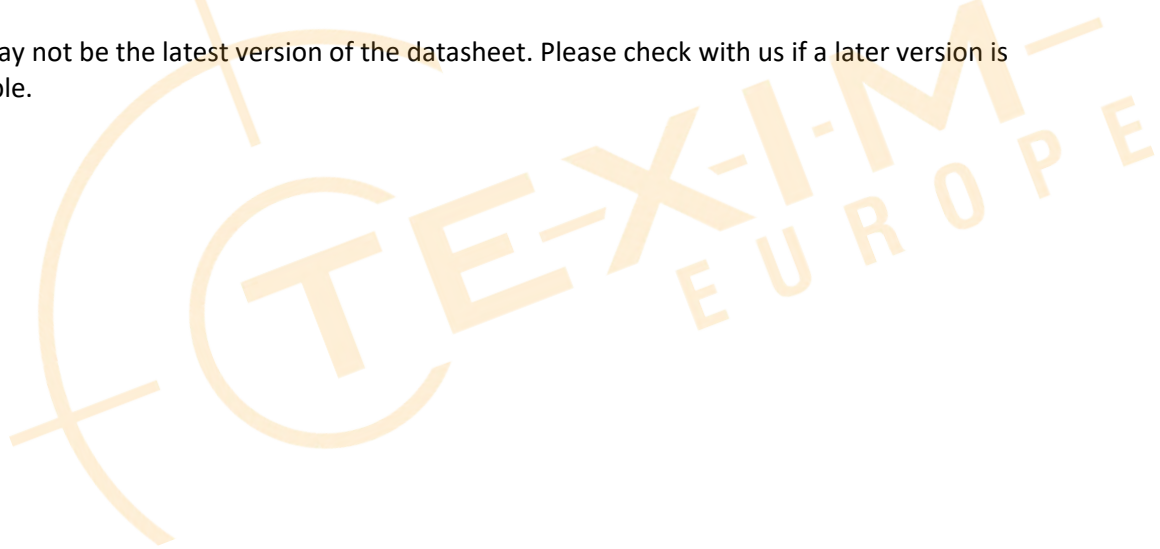



Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik

T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: austria@texim-europe.com



Nordic

Stockholmsgade 45
2100 Copenhagen

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com