


## RRC-SMB-4BC


4-bay standard battery charger  
for smart batteries

P/N: 110329

Distributed by:

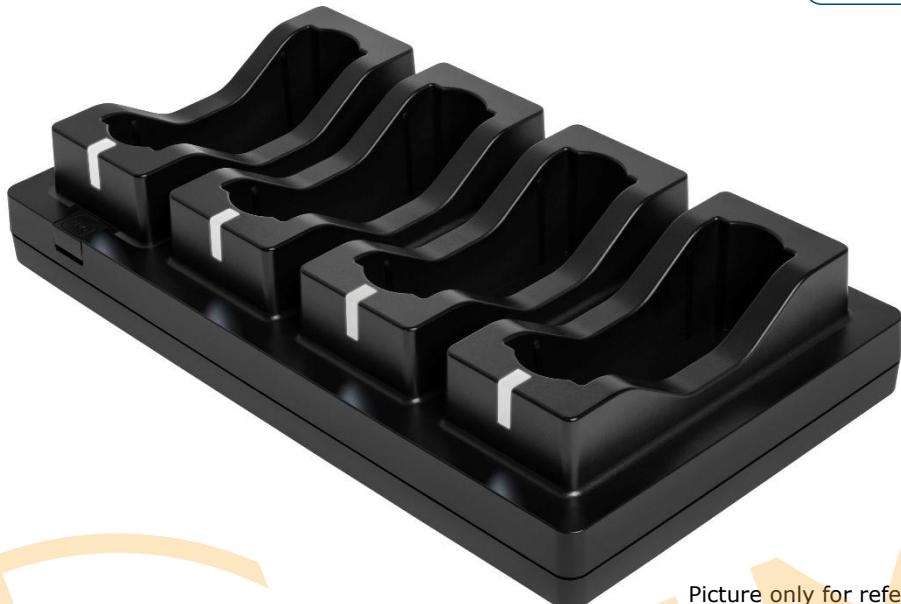

Picture only for reference

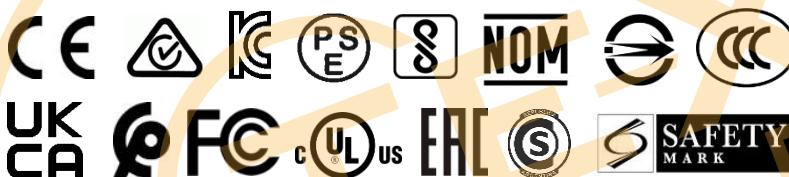

### Features

- 100W 4-bay charger
- Prioritized charging possible: faster charging of one bay integrated, triggered by push button
- For the standard battery form factors RRC203x, RRC204x, and RRC205x
- Optimized charging process for RRC batteries:
  - Longer cycle life
  - Faster charging
- Simple operation – Plug and Play
- External power supply for worldwide use
- Country-specific AC input cables available

### Applications



Standard desktop charger for smart batteries powering mobile devices used in e.g. medical, industrial, and consumer markets.

## Specification

Input		
Voltage	19.00 – 24.00VDC	
Current	5.3A max.	
Power	100.00W	
Protection	Over-current (fuse protected), under voltage	
Output		
Voltage	0 - 17.40VDC	
Current	0 - 4.70A	
Voltage tolerance	±1% max.	
Current tolerance	±10% max. @1.0A, ±3% max. @4.00A	
Charge power	100.00W max., two charging sources with 50.00W each	
Protection	Short circuit, over temperature shutdown, input-/output over current	
Environmental		
Ambient Temperature	Operation: 0°C to 40°C	Storage: -30°C to 80°C
Pressure & Altitude	1060hPa to 533hPa -382m to 5000m	1060hPa to 533hPa -382m to 5000m
Humidity (non-condensing)	5% to 90% r.H.	5% to 90% r.H.
General		
Efficiency	~95% at 100% load	
Indicator	Multi-color LED (green, red, yellow, white)	
Battery types	Standard battery form factors RRC203x, RRC204x and RRC205x	
Green procurement	RoHS 2011/65/EU + 2015/863/EU REACH 1907/2006 WEEE 2012/19/EU Chinese RoHS	
Cooling	convection cooled	
LED Indications		
White blinking (1-2 seconds)	Charger is plugged in	
LED off	Charger is ready for use, and no battery is installed	
Red blinking	Charger has an error	
White blinking	Battery is plugged in and recognized	
White breathing (slow blinking)	Battery is charging. SoC below 100%	
Green continuously illuminated	Battery is fully charged	
Yellow blinking	Reversible errors	
Red continuously illuminated	The battery has a severe defect, or it is a non-smart battery	
White light (Illumination ring)	The prioritized charging mode for the left bay is activated: Continuous charging of the left bay at the highest allowed speed. The other bays operate with reduced charging power.	
Charger Mechanical Details		
Housing dimensions (LxWxH)	220x120x46 (mm)	
Weight	~420g (without power supply)	
Safety & EMC		In combination with included external AC/DC power supply
Regulatory approvals	Europe International	EN62368-1 (CE) IEC62368-1 (CB)
Electromagnetic Emissions	Europe USA Canada Korea	EN55032, EN55035, level B FCC15 class B ICES-003 KCC
Electromagnetic Immunity	Electromagnetic field immunity EFT / Burst Surge Conducted Immunity Magnetic Fields Voltage dips, short instrumentations & voltage variations	EN/IEC61000-4-3 EN/IEC61000-4-4 EN/IEC61000-4-5 EN/IEC61000-4-6 EN/IEC61000-4-8 EN/IEC61000-4-11

## Specification for external AC/DC power supply (PS100)

P/N: 212532
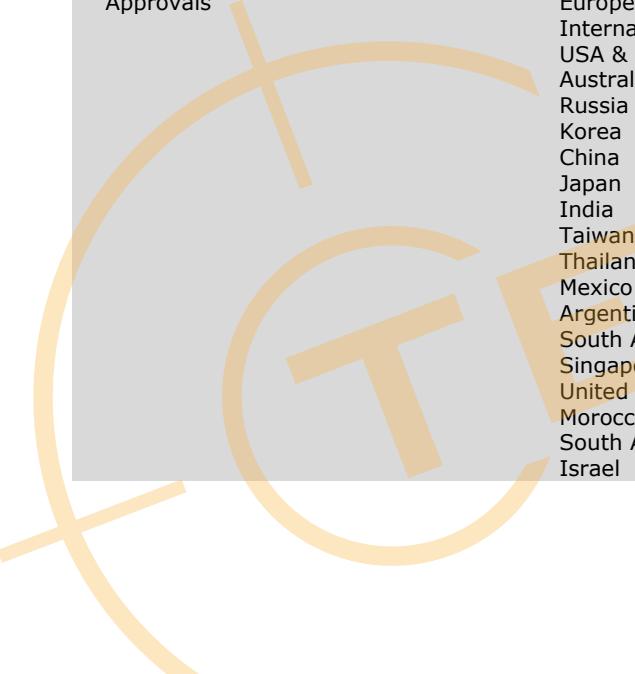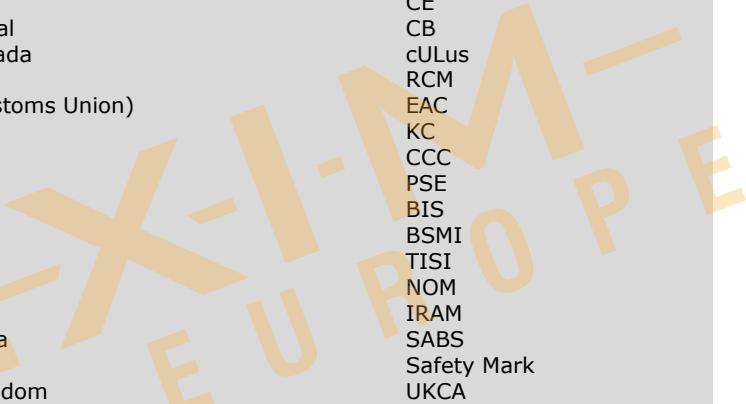
<b>Input</b>		
Voltage	100.00 – 240.00VAC ±10%, 50-60Hz	
Stand by power	< 0.15W @ no load	
<b>Output</b>		
Voltage range	20.00VDC ± 5%	
Power	100.00W max.	
Current range	5.00A max.	
Protection	Short circuit, over voltage, over current, over temperature	
<b>General</b>		
Efficiency	California's Energy Efficiency Level VI	
Ripple & Noise	380mV (p-p)	
<b>Power Supply Mechanical Details</b>		
Standard output connector	DC barrel jack, 5.5 x 2.5 x 11mm	
Housing dimensions (LxWxH)	127 x 51 x 30mm	
Weight	325g ± 5%	
Cable length	1600mm ± 50mm	
<b>Regulatory Approvals</b>		
Approvals	 Europe International USA & Canada Australia Russia (Customs Union) Korea China Japan India Taiwan Thailand Mexico Argentina South Africa Singapore United Kingdom Morocco South Africa Israel	 CE CB cULus RCM EAC KC CCC PSE BIS BSMI TISI NOM IRAM SABS Safety Mark UKCA CMIM S-Mark SII

## Recommended Accessories

Type	Product	P/N	Application	
3-pol AC-Cable		US-Version EU-Version UK-Version AU-Version CN-Version	210950 210951 211133 211134 211959	Country-specific power cable for standard battery chargers from RRC and PS100.
Car Adapter DC/DC		RRC-SMB-CAR	110041	90W car adapter with USB charging port. Power supplying in cars and trucks for standard battery chargers and power management modules from RRC or mobile devices.


**Germany/HQ**

RRC power solutions GmbH

Technologiepark 1  
66424 Homburg / Saar+49 6841 98090  
sales@rrc-ps.com
**USA**

RRC power solutions Inc.

18340 Yorba Linda Blvd.,  
# 107-437  
Yorba Linda, CA 92886+1 714 777 3604  
usa@rrc-ps.com
**Hong Kong**

RRC power solutions Ltd.

S-V,6/F, Valiant Industrial  
Centre 2-12  
Au Pui Wan Street  
Fo Tan, N.T., Hong Kong

+852 2376 0106

**China**

RRC power solutions Ltd.

Room 1306, C Building,  
Tianan International Build-  
ing, Renmin South Road,  
Luohu District, Shenzhen  
518021

+86 755 8374 1908

**Vietnam**
RRC POWER SOLUTIONS  
COMPANY LIMITEDBlock C, Lot CN4  
Dinh Vu - Cat Hai  
Economic Zone,  
Dong Hai 2 Ward  
Hai An District 180000  
Hai Phong City

# TECHNICAL DATA SHEET

RRC-SMB-4BC

**RRC**  
SETTING STANDARDS  
IN POWER SOLUTIONS

hkrrc@rrc-ps.cn

hkrrc@rrc-ps.cn

vietnam@rrc-ps.com



## **Disclaimer**

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.


It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

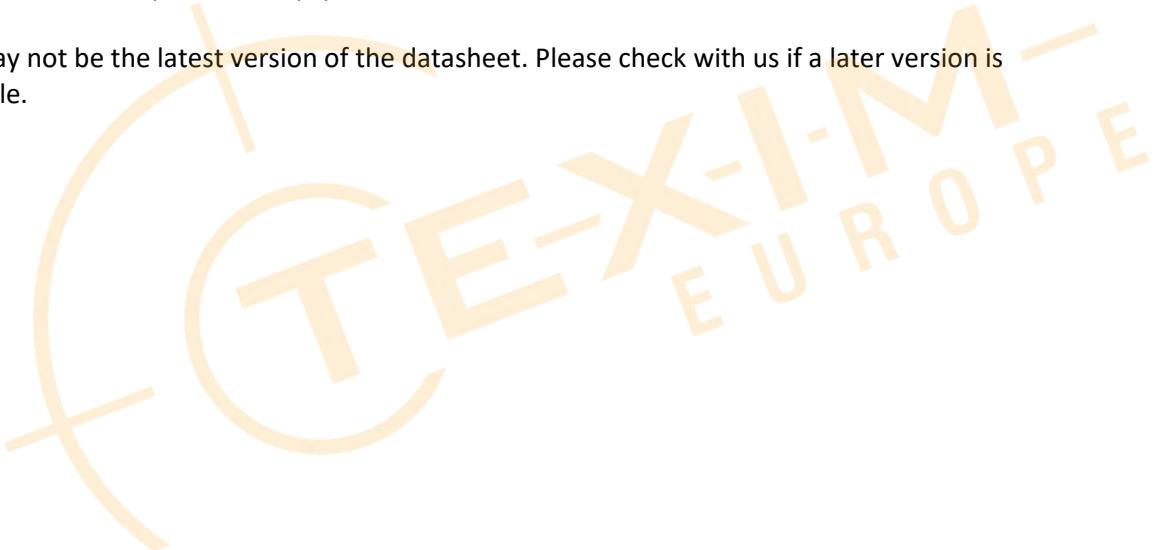



## Headquarters & Warehouse

Elektrostraat 17  
NL-7483 PG Haaksbergen  
The Netherlands

T: +31 (0)53 573 33 33  
E: info@texim-europe.com  
Homepage: [www.texim-europe.com](http://www.texim-europe.com)



### The Netherlands

Elektrostraat 17  
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33  
E: nl@texim-europe.com



### Belgium

Zuiderlaan 14, box 10  
B-1731 Zellik

T: +32 (0)2 462 01 00  
E: belgium@texim-europe.com



### UK & Ireland

St Mary's House, Church Lane  
Carlton Le Moorland  
Lincoln LN5 9HS

T: +44 (0)1522 789 555  
E: uk@texim-europe.com



### Germany

Bahnhofstrasse 92  
D-25451 Quickborn

T: +49 (0)4106 627 07-0  
E: germany@texim-europe.com



### Germany

Martin-Kollar-Strasse 9  
D-81829 München

T: +49 (0)89 436 086-0  
E: muenchen@texim-europe.com



### Austria

Martin-Kollar-Strasse 9  
D-81829 München

T: +49 (0)89 436 086-0  
E: austria@texim-europe.com



### Nordic

Stockholmsgade 45  
2100 Copenhagen

T: +45 88 20 26 30  
E: nordic@texim-europe.com



### Italy

Martin-Kollar-Strasse 9  
D-81829 München

T: +49 (0)89 436 086-0  
E: italy@texim-europe.com