

Distributed by:



[Distributed by www.texim-europe.com](http://www.texim-europe.com)

WINSTAR Display

OLED SPECIFICATION



Model No:

WEA016080A

General Specification





Item	Dimension	Unit
Dot Matrix	160 x 80 Dots	—
Module dimension	43.5 x 22.5 x 5.96 Max.	mm
Active Area	35.02 x 17.50	mm
Pixel Size	0.199 x 0.199	mm
Pixel Pitch	0.219 x 0.219	mm
Display Mode	Passive Matrix	
Display Color	Monochrome	
Drive Duty	1/80 Duty	
Gray Scale	4 bits	
IC	SSD1320	
Interface	4-Wire SPI	
Size	1.54 inch	

Contour Drawing & Block Diagram

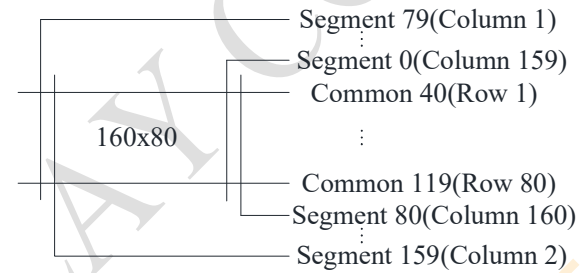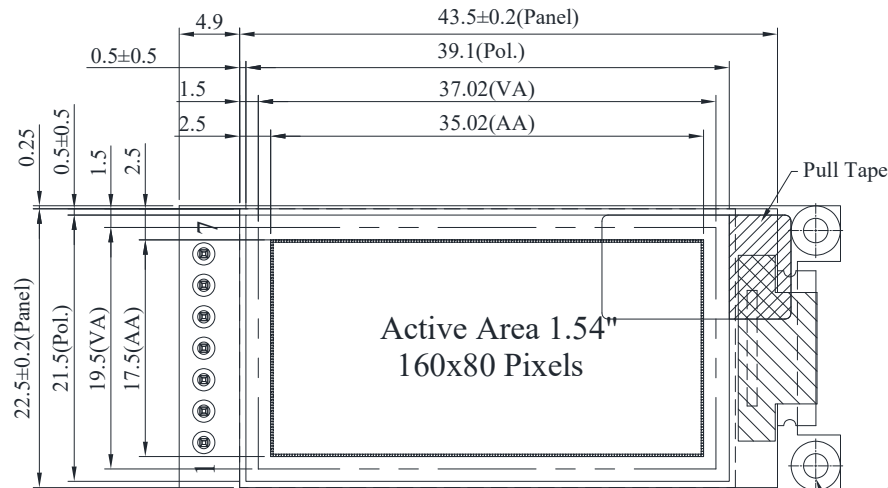

PIN	SYMBOL
1	GND
2	VCC
3	D0
4	D1
5	RES#
6	D/C#
7	CS#

Com & Seg layout

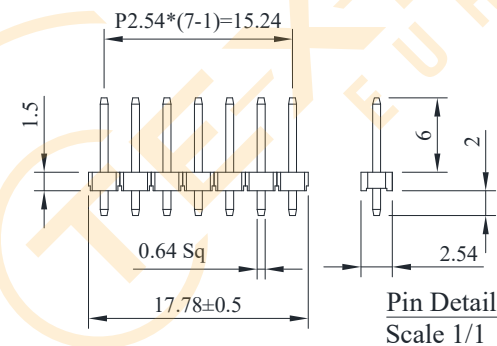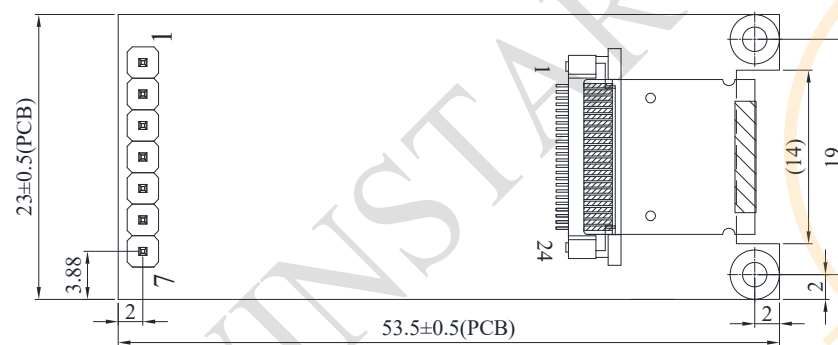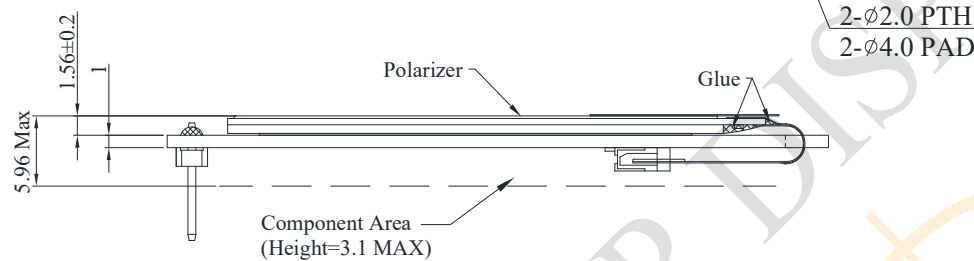

Dots Size
Scale 10/1

The non-specified tolerance of dimension is ±0.3mm.

Interface Pin Function

No.	Symbol	Function
1	GND	Ground pin.
2	VCC	Power Supply for OEL Panel This is the most positive voltage supply pin of the chip. It must be connected to external source.
3	D0	The serial clock input
4	D1	The serial data input
5	RES#	Power Reset for Controller and Driver This pin is reset signal input. When the pin is low, initialization of the chip is executed. Keep this pin pull high during normal operation.
6	D/C#	Data/Command Control This pin is Data/Command control pin.
7	CS#	Chip Select This pin is the chip select input. The chip is enabled for MCU communication only when CS# is pulled low.

Absolute Maximum Ratings

Parameter	Symbol	Min	Typ.	Max	Unit
Supply Voltage for Display	VCC	-0.3	—	5.5	V
Operating Temperature	TOP	-40	—	+80	°C
Storage Temperature	TSTG	-40	—	+85	°C

Electrical Characteristics

DC Electrical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage for Logic	VCC	—	2.8	3.0	5.2	V
High Level Input	VIH	—	0.8×VCC	—	VCC	V
Low Level Input	VIL	—	0	—	0.2×VCC	V
High Level Output	VOH	—	0.9×VCC	—	VCC	V
Low Level Output	VOL	—	0	—	0.1×VCC	V
Display 50% Pixel on	ICC	VCC = 3V	—	110	220	mA

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.


It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

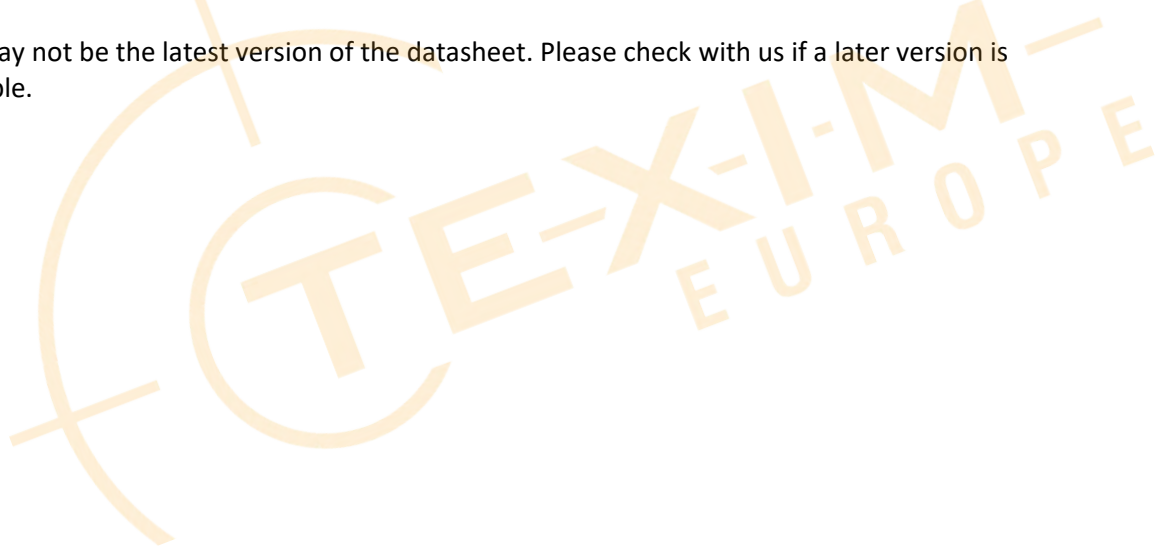



Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik

T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
E: austria@texim-europe.com



Nordic

Stockholmsgade 45
2100 Copenhagen

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com