



理義科技股份有限公司
LIYITEC INCORPORATED

Engineering Specification

工程規格書

Customer :
客戶代號
Product : Touch Panel (Non Glare)
產品名稱 : 觸控面板(霧面)
Model : TR5-104F-36N(83F4-4180-A4360)
型號
Type : Five-Wire Analog Resistive Series
類型 : 五線式類比電阻式
Version : E/S D01
版次
Date : Mar-20-2009
日期

Customer Approval 客戶承認欄
Date of Signature 承認日期 : _____

Approved 核准	Reviewed 核對	Prepared 製作
陳民偉	馬治強	李順成

LIYITEC INCORPORATED

No.9, SingYe Street, GueiShan Township, TaoYuan County 333 Taiwan
台灣 桃園縣(333)龜山鄉興業街 9 號
TEL: +886-3-359-1055 <http://www.liyitec.com>
FAX: +886-3-359-2055 E-mail: sales@liyitec.com



Confidential



理義科技股份有限公司 LIYTEC INCORPORATED

TABLE OF CONTENTS

Page

目錄

頁碼

1. FEATURES.....	4
特性說明.....	
2. DIMENSIONS & ENGINEERING DRAWING.....	4
產品尺寸和工程圖.....	
3. ENVIRONMENTAL CHARACTERISTICS.....	5
環境特性.....	
4. OPTICAL CHARACTERISTICS.....	5
光學特性.....	
5. ELECTRICAL CHARACTERISTICS.....	5
電氣特性.....	
6. MECHANICAL CHARACTERISTICS.....	6
機械特性.....	
7. RELIABILITY.....	6
信賴性特性.....	
8. DURABILITY.....	7
耐久特性.....	
9. LINEARITY INSPECTION METHOD.....	7
線性測試方式.....	
10. APPEARANCE INSPECTIONS.....	8
外觀檢驗說明.....	
11. INSTALLATION GUIDE.....	9
組裝注意事項.....	
12. WARRANTY.....	10
產品保固.....	
13. CAUTIONS.....	11
注意事項.....	
14. APPEARANCE SPECIFICATIONS.....	12
外觀檢驗規範.....	
15. DURABILITY TEST METHOD.....	13
耐久測試方式.....	
16. CAUTIONS FOR PRODUCT HANDLING.....	14
拿取注意事項.....	
17. PACKING METHOD.....	15
包裝方式.....	

1. FEATURES

特性


Type 類型	Five-Wire Analog Resistive Touch Panel 五線式類比電阻式		
Structure 構造	Material 材質	Thickness 厚度	Type 類型
	ITO/PET	188um	Non-Glare 霧面
	ITO/GLASS	1.8mm	Normal 普通
Input Mode 輸入方式	Stylus or Finger 觸控筆或手指		
Connector 連接	FPC 軟排線		

2. DIMENSIONS

產品尺寸

Item 項目		Specification (unit: mm)單位:mm
(1)	Frame Size 外尺寸	231.65±0.76x174.24±0.76
(2)	View Area 可視區	213.87±0.76x161.04±0.76
(3)	Active Area 動作區	211.58±0.76x158.75±0.76
(4)	Total Thickness 總厚度	2.05±0.20
(5)	Tail Length 排線長度	190.00±1.00

[Engineering Drawing] 工程圖

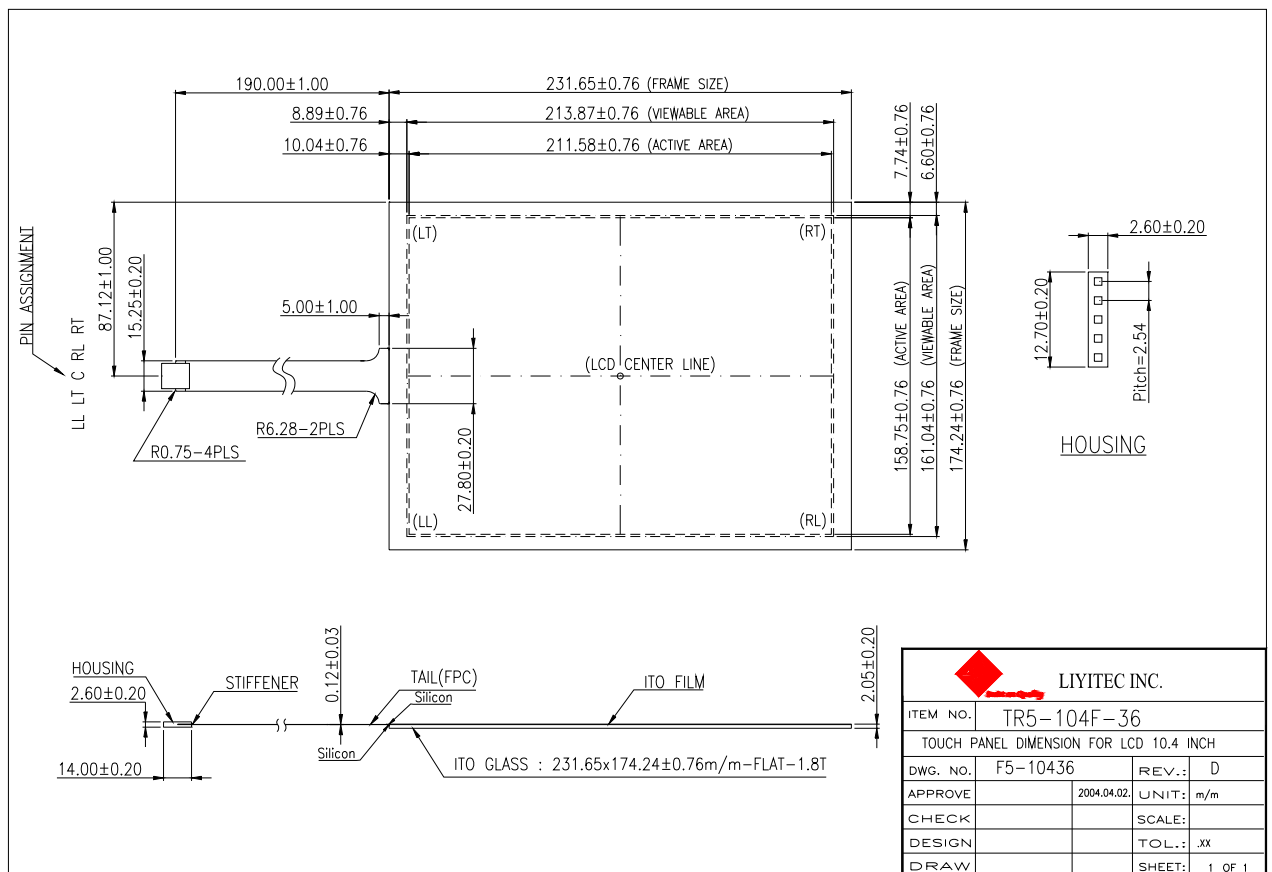



理義科技股份有限公司 LIYTEC INCORPORATED

3. ENVIRONMENTAL CHARACTERISTICS

環境特性

Status 狀態		Temperature 溫度
(1)	Operation 操作溫度	-10~60°C
(2)	Storage 儲存溫度	-40~75°C

Note: The environment is of normal atmosphere pressure.

註:在正常氣壓的環境

4. OPTICAL CHARACTERISTICS

光學特性

Item 項目		Specification 規格
(1)	Transparency 透光度	82±5%

Note1: Transparency is measured by using BYK-Gardner instrument.

Note2: Test method-satisfy (2) of item 10 on Page 8.

註:透光度用 BYK-Gardner 儀器量測。附合第 8 頁,10-2 規範。

5. ELECTRICAL CHARACTERISTICS

電氣特性

Item 項目		Specification 規格
(1)	Operation Voltage 操作電壓	5VDC
(2)	Linearity Tolerance 線性誤差	≤ 1.5% (Test method reference item 9 on Page 7) (測試方式參看第 7 頁第 9 項)
(3)	Chattering 反應時間	≤ 10ms
(4)	Insulation 絕緣阻抗	≥ 2MΩ, 25VDC
(5)	Endurance 耐壓測試	No arcing damage at 25VDC, 60sec.
(6)	Operative Resistance 操作阻抗	≤ 2KΩ



理義科技股份有限公司 LIYTEC INCORPORATED

6. MECHANICAL CHARACTERISTICS

機械特性

Item 項目	Condition 條件	Specification 規格
(1) Activation Force 作動力	Stylus R0.8	Avg: 5~50g
(2) Impact 落球測試	Φ 22.0mm Steel Ball, 45g, Height=30cm	1 time, no damage (Impact at center area)
(3) Static Load 靜置荷重	15kg at Φ 20mm area for 30sec	No damage
(4) Hardness 表面硬度	3H pencil, pressure 1n, 45° (JIS K5400)	≥ 3H
(5) Tail Peeling 排線拉力強度	800g by 90 degree	Satisfy (2) of item 5
(6) Tail Bending 排線繞折強度	10 times by radius R:1mm 500g left & right 135 degree	Satisfy (2) of item 5

7. RELIABILITY

信賴性特性

Item 項目	Condition 條件	Specification 規格
(1) Constant Temperature and Humidity 恆溫恆濕測試	60°C / 90%RH, 240 hrs and normalized for 24 hrs 溫度 60°C 濕度 90%, 240 小時回 常溫 24 小時後測試	After the reliability test, the PET layer may have the condition of bubble; but the electrical characteristics still satisfy (1) of item 4; (2), (4) of item 5; 經信賴性測試後, 上層 薄膜可能會有不平整 情況, 但電氣功能仍符 合第 4 項的(1)和第 5 項的(2)、(4)。
(2) Heat Cycle 高溫測試	75°C / 240 hrs and normalized for 4 hrs 溫度 75°C 240 小時回常溫 4 小時 後測試	
(3) Cold Cycle 低溫測試	-40°C / 240 hrs and normalized for 4 hrs 溫度 -40°C 240 小時回常溫 4 小時 後測試	
(4) Thermal Cycle 冷熱循環	-40°C ~ 75°C, 1hr/cycle (0.5hr each), 50 cycles (within 24 hr) and normalized for 4 hrs 溫度 -40 到 75°C, 一次循環 60 分 鐘(各 30 分鐘), 共 50 個循環, 回 常溫 4 小時(24 小時內)後測試	



理義科技股份有限公司 LIYTEC INCORPORATED

8. DURABILITY

耐久性特性

Item 項目		Condition 條件	Specification 規格
(1)	Finger Touch 打點測試	35Million times, (Please refer to Appendix II)	Satisfy(2),(4) of item 5;

9. LINEARITY INSPECTION METHOD



線性測試方式

Voltage (DC 5V) is applied to RT+RL or LL+RL and ground (0V) is applied to LT+LL or LT+RT.

Using stylus to draw straight points (LX and LY) at 12.5 mm intervals within pattern area and detect the voltage at SG to Measure the voltage differences between RT+RL and LT+LL or RL+LL and LT+RT.

電壓 5VDC 接到 RT+RL 或 LL-RL, 0V 接到 LT+LL 或 LT+RT。使用塑膠筆在動作區內劃間隔 12.5mm 的 LX 和 LY 的線條。量測 RT+RL 和 LT+LL 或 RL+LL 和 LT+RT 之間的電壓。

Cor

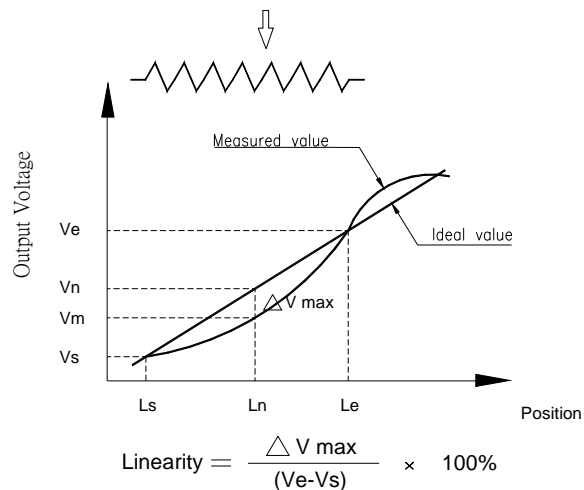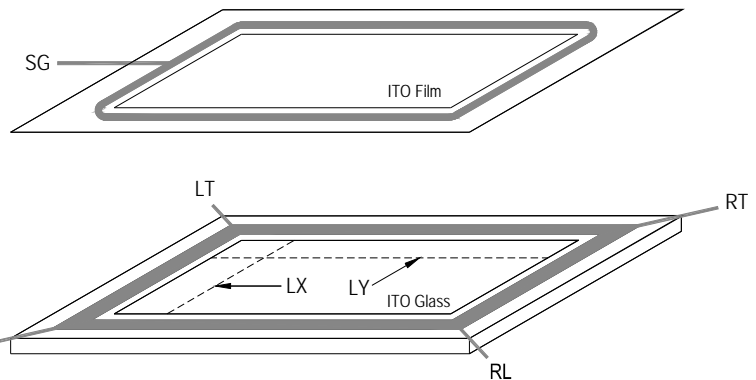

10. APPEARANCE INSPECTIONS


外觀檢驗說明

(1) The flaws and impurities are allowed outside viewing area except for those affecting electrical functions.




不影響產品電氣功能的情況下可視區之外允許有裂傷和髒污。

(2) The inspection shall be performed by using one 1200 ± 200 LUX fluorescent lamp as back or side light. The panel shall be placed at 30cm away from eyes as shown below.

使用 1200 ± 200 LUX亮度的日光燈和觸控面板放在距眼睛30公分做檢驗。

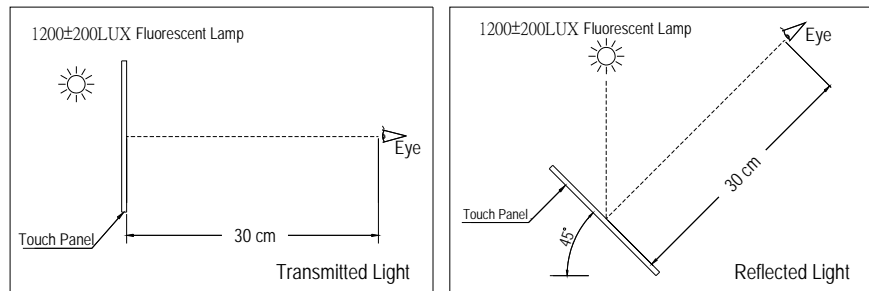

(3) Glass flaw 玻璃裂傷

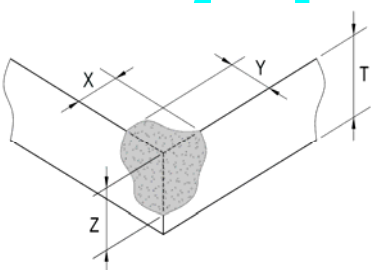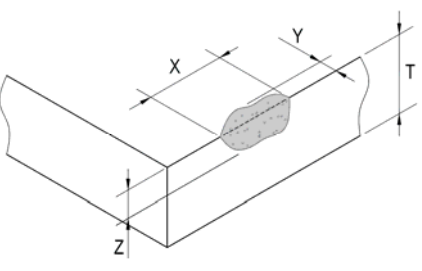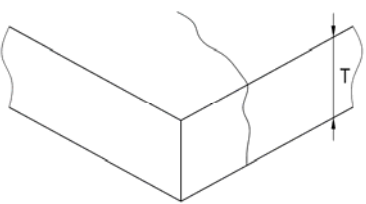Corner flaw 角裂傷		Please refer to page 12, item 14 參看第 12 頁 第 14 項
Edge flaw 邊緣裂傷		Please refer to page 12, item 14 參看第 12 頁 第 14 項
Progressive flaw 逐漸裂傷		Not allowed 不允許

T=Glass thickness
T:玻璃厚度

11. INSTALLATION GUIDE

組裝注意事項

- (1) Front Bezel Opening must be located between View Area and Active Area.
外殼的開口要設計在可視區和動作區的中間。
- (2) Elastic materials are recommended as supports to fix the Touch Panel.
建議使用彈性材質來固定觸控面板。
- (3) Support materials must be designed out of the Viewable Area.
將支撐材質設計在可視區的外側。
- (4) Front Bezel Opening must be designed with enough gap to the Touch Panel surface.
外殼和觸控面板表面之間要有足夠的空隙。
- (5) **Avoid direct bezel contact with edges of the Touch Panel after mounting.**
組裝之後應避免外框直接碰觸到面板的外側邊緣。


- *(6)** The area between the View Area and Active Area is a none-input area and also very fragile. *It is absolutely forbidden to draw lines along the edge of this area because it will cause damage on the ITO layer and functional failure of the Touch Panel.*

觸控面板的可視區和動作區之間的區域為禁止輸入區,也就是脆弱區。嚴禁在此區內邊緣劃線,如此會造成薄膜的 ITO 層被破壞而觸控面板喪失功能。

- *(7)** If the applications of customer need to draw lines along the edges, please contact Liyitec's engineer to discuss the design of the Front Bezel.

若客戶的使用需要在邊緣畫線,請連絡理義工程師討論外殼的機構設計。

- *(8)** This installation guide is only for customer reference.
此組裝方式僅供客戶參考。

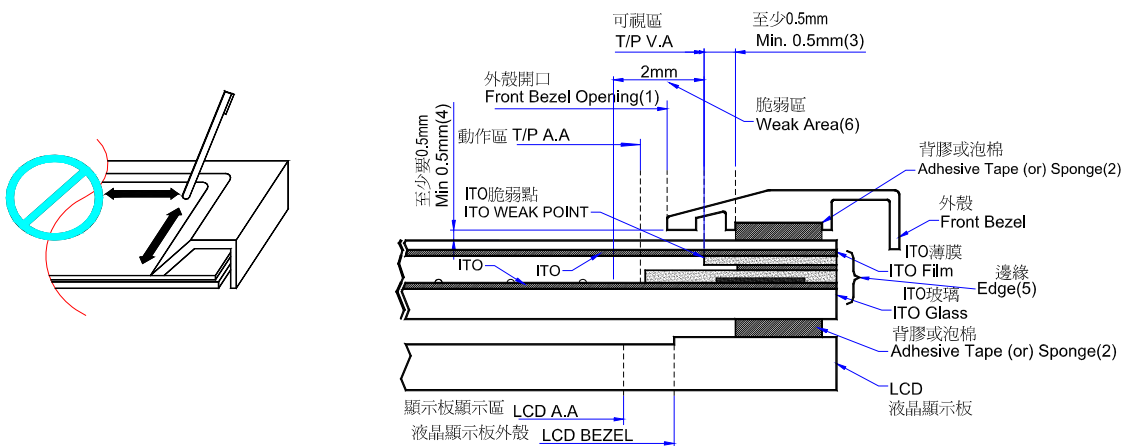

***Note: Please take attention seriously on items 6, 7 and 8.**

***注意: 請特別注意第 6、7 和 8 項。**



理義科技股份有限公司 LIYTEC INCORPORATED

12. WARRANTY

With the exceptions listed below, all Liyitec's products are guaranteed free of manufacturing defects for a period of up to one year. All defected products will be repaired or exchanged free of charge if determined to be sole responsibility of Liyitec. Liyitec reserves the sole discretion in determining the causes and the responsibilities of any defects or damages. For details, please refer to Liyitec's "Product Warrant Policy".

產品保固

本產品除了以下**例外條件**之外其保固時間為二年，凡屬本公司責任之出廠不良，會提供免費維修或換新品服務。細節請參看"產品保固條例"。

List of Exceptions:

例外條件:

1. Damages caused by improper handling of clients, including and not limited to, during shipping or manufacturing processes.
客戶操作不當(含製程和運送)造成的損傷。
2. Damages caused by disasters, either by natural causes or human factors, after the delivery of products.
出貨後天災(或)不可抗拒的因素(或)其他人為因素造成的損傷。
3. Any repairs, modifications or disassembling of Liyitec's products without prior notification to and the consent of Liyitec.
未經本公司同意，客戶自行拆卸、維修和更改造成的損傷。

Confidential



理義科技股份有限公司 LIYITEC INCORPORATED

13. CAUTIONS

注意事項

Storage 儲存	(1) Store packaged products at the temperature and humidity mentioned in the specification with care. Do not expose products to direct sunlight or stress such as that caused by piling. 請將產品儲存在規範溫度和濕度環境，勿將產品直接曝曬在陽光下或堆疊。
Unpacking 拆卸	(1) Check for the correct vertical direction of the package before unpacking. 拆包裝之前先確認包裝的拆封方向。
Handling 拿取	(1) Clean finger sacks or gloves and mask are required during handling to prevent finger-prints or stain on the products and damages to the products caused by sharp edges. 拿取時請將手清洗乾淨、帶手套和口罩，以免手指紋和異物髒污到產品。 (2) Do not handle the viewing area of the panel. 拿取時勿觸可視區。 (3) Do not handle the panel at the tail (connector) to prevent detachment of the tail to the panel. 勿從排線拉起，以免排線受損。
Cleaning 清潔	(1) Clean soft clothes with neutral detergent or ethanol may be used for cleaning. 使用乾淨的軟布沾上酒精或天然清潔劑清潔產品。 (2) Do not use any chemical solvent, acidic or alkali solution. 勿用化學藥劑或酸性或鹼性溶劑。 (3) Any use or soaking of liquid which may result peeling or malfunctioning of the film and glass is prohibited. 任何會對薄膜與玻璃黏合產生不良影響的液體或者浸泡皆一概禁止。
Installation 組裝	(1) Excessive force or strain to the panel or the tail is prohibited. 禁止在面板和排線上施加壓力。 (2) *Please take attention seriously on 6, 7 and 8 of items11, Installation Guide on Page 9. *: 請特別注意第 9 頁,第 11 項的 6、7 和 8。
Operating 操作	(1) Operate with a stylus (tip R0.8 or over), or with a finger without applying excessive load. Sharp edged or hard articles are prohibited. 使用 R0.8 觸控筆或手指操作。避免尖銳物觸碰面板表面。 (2) The gathering of dew in the panel may occur with abrupt temperature or humidity changes. A stable environment condition is recommended. 溫度和濕度突變的情況下，表面會產生霧氣。建議在穩定的環境下使用。
Environment 環境	At Liyitec, a print-coated metal is used as electrodes. Therefore do not used T/P in an atmosphere which contains erosive gases. 本公司的產品上有金屬印刷線路，故請勿在具有腐蝕性氣體的環境下使用本公司產品。
Others 其他	(1) Keep the surface clean. No adhesives should be applied. 表面不可塗抹粘著劑並保持清潔。 (2) Avoid high voltage and static charge. 避免高壓和靜電。 (3) Liyitec reserves the right to substitute materials with the same grade and specification. 本公司保有同規格的材料變更權利。 (4) Above specification is for reference only. For details, please contact: sales@liyitec.com 本規格書儘供參考，如有特殊需求，請洽: sales@liyitec.com



理義科技股份有限公司 LIYITEC INCORPORATED

14. Appearance Specifications

外觀檢驗規範

Defect Name 缺陷	Criteria 規範	Judgment 判定
Particle 異物	$D \leq 0.25$	OK
	$0.25 < D \leq 0.3$	Each Area ⁽³⁾ ≤ 2 , Total ≤ 5 , OK 每區 ⁽³⁾ ≤ 2 , 共 ≤ 5 , OK
	$D > 0.3$	NG
Blur Stain and Interference Pattern 髒污和異紋	$D \leq 0.25$	OK
	$0.25 < D \leq 0.3$	Each Area ⁽³⁾ ≤ 2 , Total ≤ 5 , OK
	$D > 0.3$	NG
Linear Object 外來線狀物	$W \leq 0.05$ and $L \leq 12$	OK
	$0.05 < W \leq 0.1$ and $L \leq 12$	Total ≤ 3 , follow Condition 1, OK
	$W > 0.1$ and $L > 12$	NG
Scratch 刮傷	$W \leq 0.05$ and $L \leq 12$	OK
	$0.05 < W \leq 0.1$ and $L \leq 12$	Total ≤ 5 , follow Condition 1, OK
	$W > 0.1$ and $L > 12$	NG
Damage to Glass 玻璃的裂傷 A: corner flaw 角裂傷 B: Edge flaw 邊緣裂傷	$X \leq 2$, $Y \leq 2$, $Z \leq \frac{1}{3}T$ Please refer to the figures in page 8	Total ≤ 2 , OK Damages with possible worsening are not allowed. 不允許有可能會繼續裂的裂痕。
Condition 1: Distance between defects should not be less than 20mm. 條件(一): 兩個不良處之間的距離要 20mm 以上。 Note 1: Particle, Stain or Linear Object that can be clean out easily within 3 times is disregarded. 註(一): 異物、髒污、條狀物正常擦拭 3 次可去除, 即可允收。 Note 2: All dimensions are in mm unless otherwise specified. 註(二): 尺寸單位為 mm, 除非另有標示。		

Item	Name of Defect	Definition
1	Dimension 尺寸	D: Average Diameter; W: Width; L: Length; T: Glass Thickness; D: 平均直徑; W: 寬度; L: 長度; T: 玻璃厚度
2	Inspection Area 檢驗區	According to engineering drawing, Viewable Area is the Inspection Area. Any defect outside of the Viewable Area may be disregarded. 依工程圖的可視區為檢驗區域, 可視區以外的不良可忽略。
3	Each Area 每區	One of the areas of T/P Viewable Area divided into 9 (3 by 3) equal areas. 將觸控螢幕平均分割為 3x3 的 9 個區域, 每區為其中一個區域。
4	Stain 髒污	No clear outline, not easy to identify with eyes, but able to clean out by wiping. 輪廓不清晰, 以肉眼辨識不易的沾污或與觸控面板表面有明顯色差, 存在於觸控面板表面, 可擦拭乾淨。
5	Interference Pattern 異紋	No clear outline, not easy to identify with eyes and unable to clean out by wiping. 輪廓不清晰, 以肉眼辨識不易的沾污或與觸控面板表面有明顯色差, 存在於薄膜與玻璃內部, 無法擦拭乾淨。


15. Durability Testing Method

耐久測試方式


1. Pen Sliding:

劃線測試方式:

- ❑ Test Position: Center in Active Area 20mm×20mm (Fig. 1)
測試位置: 動作區的中心 20mm×20mm (圖. 1)
- ❑ Test pen: R0.8 polyacetal Stylus. (Fig 2)
測試筆: R0.8 塑膠筆(圖.2)
- ❑ Test method: Write in active area.
測試方式: 寫在動作區

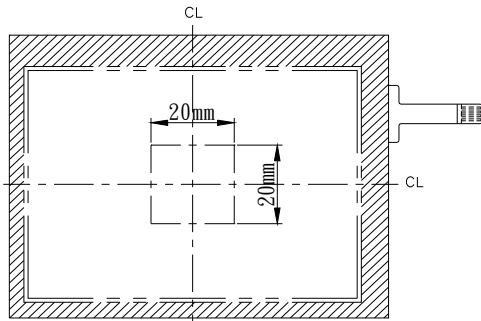


[Fig. 1]

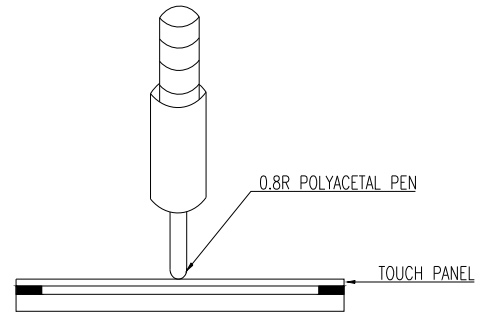


[Fig. 2]

2. Finger Touch: 打點測試方式:

- ❑ Test Position: Center of Active Area. (Fig 3)
測試位置: 動作區的中心點.(圖.3)
- ❑ Test Pen R8.0 Silicon Rubber Hs60°. (Fig .4)
測試筆: R8 橡膠頭 Hs60°(圖.4)
- ❑ Test Method: Knock at the single point
測試方式: 打在同一個點.

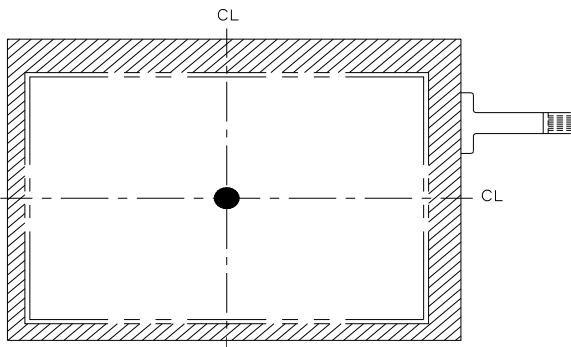

[Fig. 3]

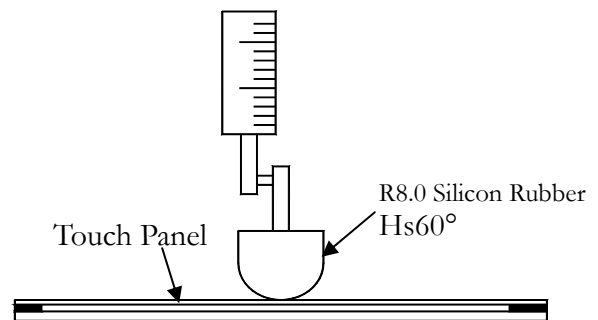


[Fig. 4]






LIYTEC INCORPORATED

16. Cautions for Product Handling










Note: To prevent malfunction as a result of improper handling of touch panel product, please make sure that the following instructions are followed:

- 1、Wear gloves at all time upon handling touch panel, and hold touch panel only at the edge of the panel.
- 2、Use only the standard polyacetal rod pen (with a radius of 0.8 at the end of the rod) for product testing.
(Fig: 1,2,3)

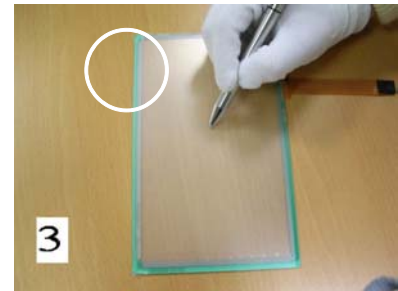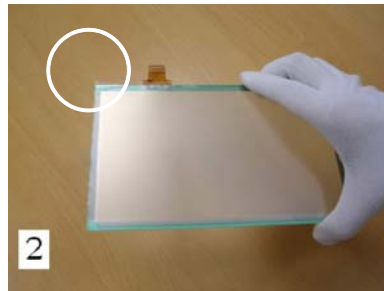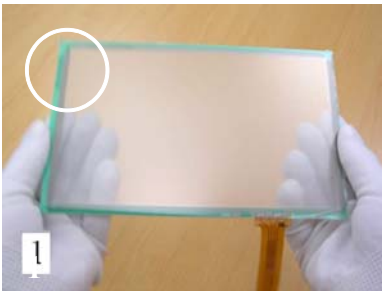

- 3、Do not lift touch panel via the connector (Tail). [Excess force applied on the Tail may cause displacement of the connector or cracks at the base of the panel.] (Fig: 4,5,6)
- 4、Do not handle the touch panel via the surface of the panel. [Excess force applied on the touch panel may crack the glass layer of the touch panel.] (Fig: 7,8)
- 5、Do not pile up touch panels together or place heavy substance on the touch panel. [Excess stress on the touch panel may scratch the surface of the touch panel, or crack the touch panel.] (Fig:9,10)
- 6、Do not touch the surface of the touch panel via sharp objects. [Sharp objects may cause scratch on the surface of the touch panel.] (Fig: 11)
- 7、Do not place the face of the film on the table or any other surface. [Various objects on the table may scratch the surface of the touch panel.] (Fig: 12)

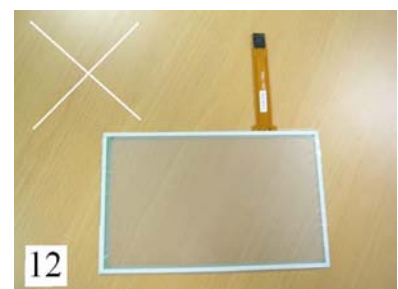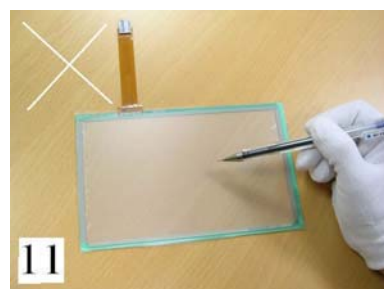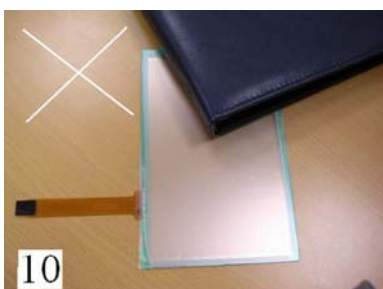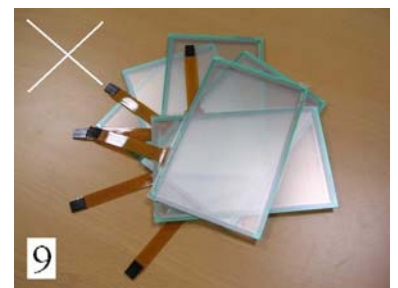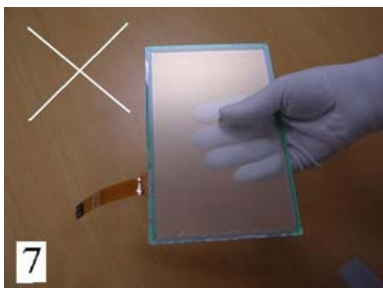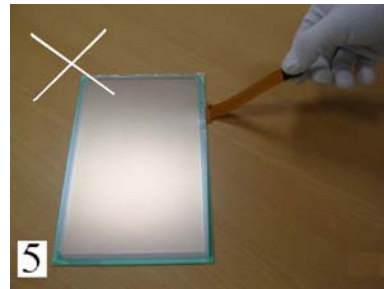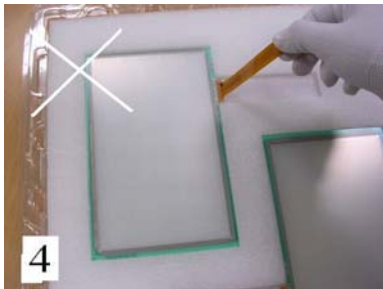

17.Packing Method

